

仮想化環境に基づく内網資産発見とサーバー安全加固

1. 隔離実験環境の構築

インストール

Oracle VirtualBox

ダウンロード


kali-linux-2026.2-installer-amd64.iso

ubuntu-22.04.5-live-server-amd64.iso

2. ネットワーク設計


本実験では外部ネットワーク（インターネット）を使用しないため、ホストオンリー（Host-only）モードを使用します。

隔離されたイントラネットを作成します（DHCPの有効化は任意です）。

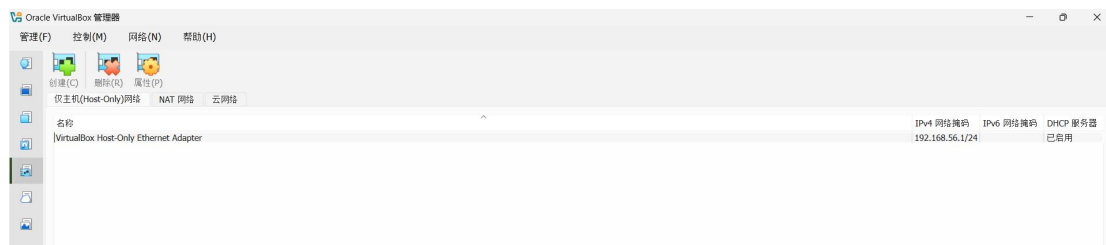


Kali と Ubuntu の 2 台の仮想マシンを作成します。それぞれの設定は、メモリ：2048MB、CPU：2 コア、仮想ハードディスク：

20GB とし、ハードディスクのファイルタイプおよび形式には「VDI」を選択します。

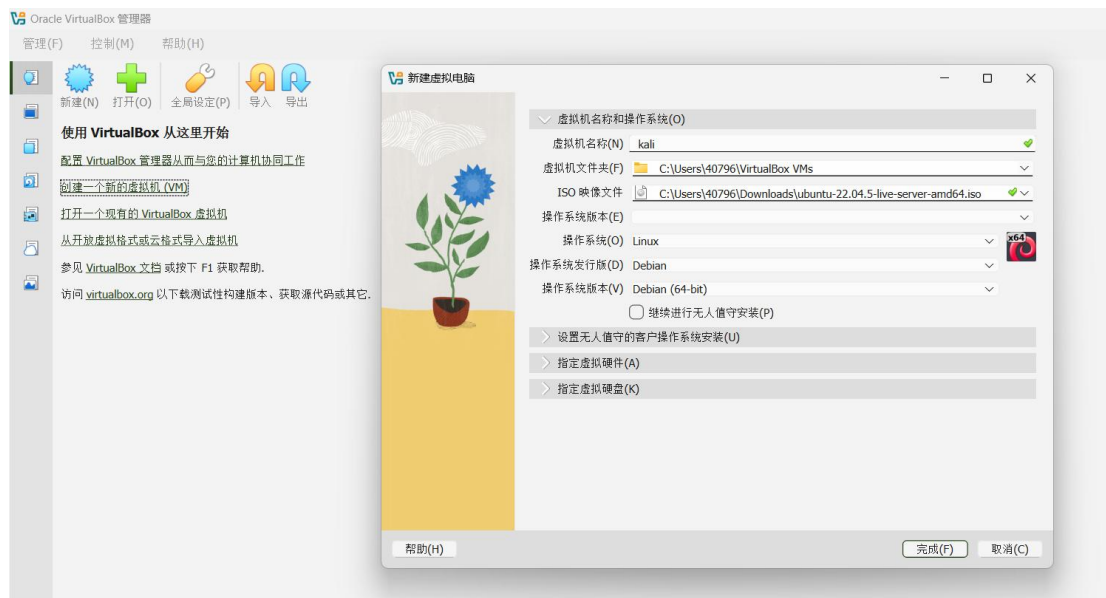


Kali はグラフィカルインターフェースを使用して起動し、インストールプロセス中に適切な言語、地域などを選択する必要があり、ドメイン名は空欄にし、ディスクパーティションは初心者向けの「ディスク全体を使用する」を選択します

インストール完了後、端末を開いて ip addr を入力し ip を検証します

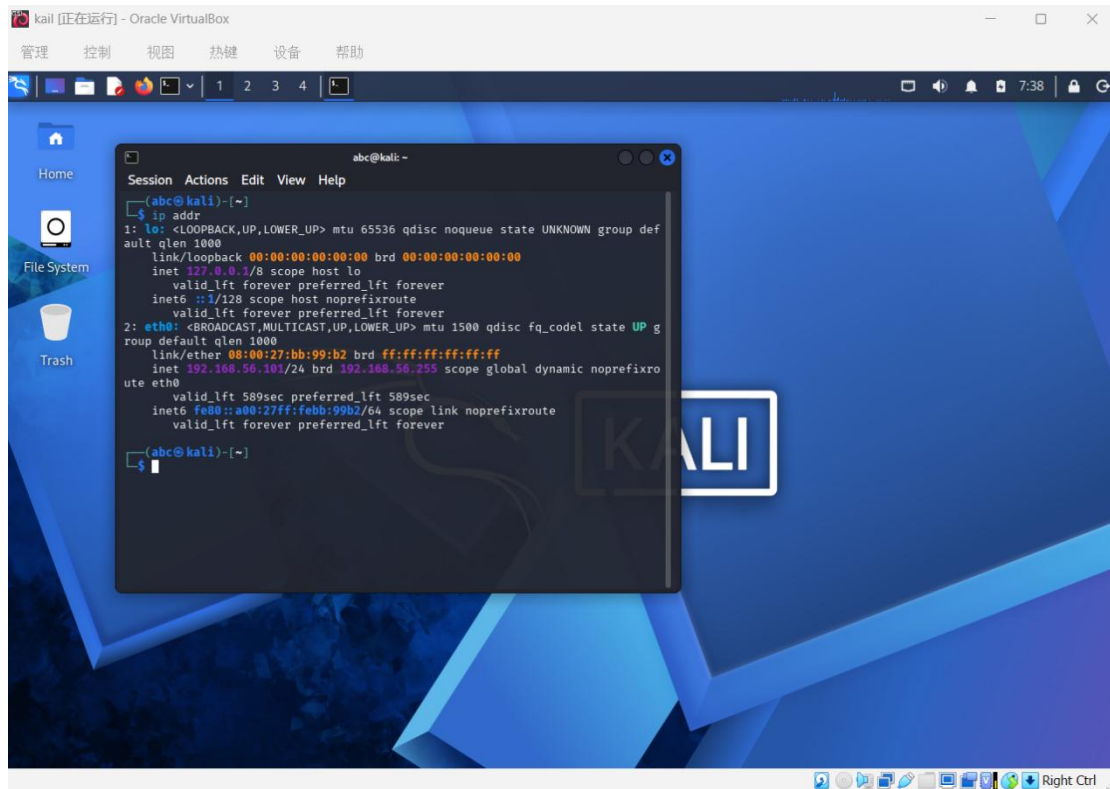

Ubuntu をインストールする際は SSH server にチェックを入れる
必要があり、操作は比較的簡単なのでこれ以上は記述しません。
初回ログイン成功時、バックグラウンドプログラムが自動的に出力
するログ:

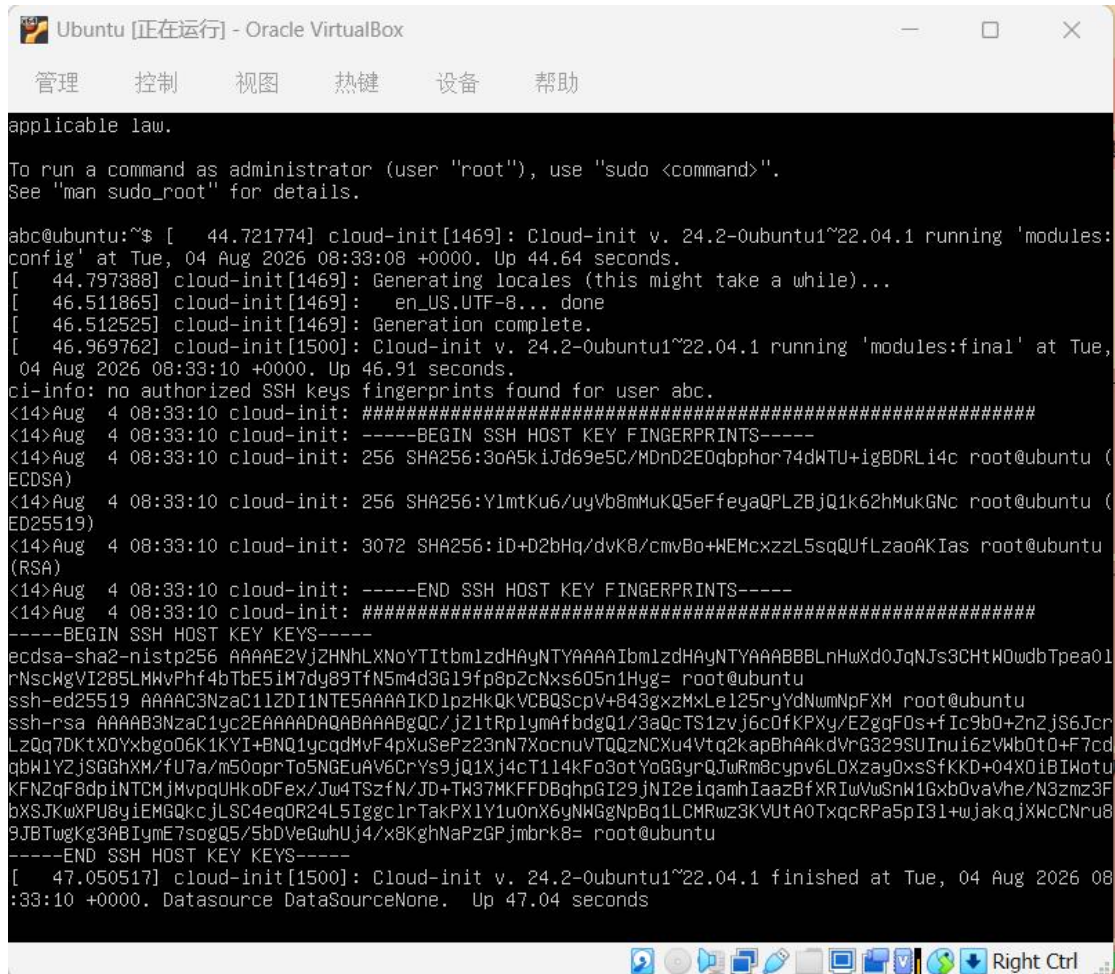

```
applicable law.

To run a command as administrator (user "root"), use "sudo <command>".
See "man sudo_root" for details.

abc@ubuntu:~$ [ 44.721774] cloud-init[1469]: Cloud-init v. 24.2-0ubuntu1~22.04.1 running 'modules:
config' at Tue, 04 Aug 2026 08:33:08 +0000. Up 44.64 seconds.
[ 44.797388] cloud-init[1469]: Generating locales (this might take a while)...
[ 46.511865] cloud-init[1469]: en_US.UTF-8... done
[ 46.512525] cloud-init[1469]: Generation complete.
[ 46.969762] cloud-init[1500]: Cloud-init v. 24.2-0ubuntu1~22.04.1 running 'modules:final' at Tue,
04 Aug 2026 08:33:10 +0000. Up 46.91 seconds.
ci-info: no authorized SSH keys fingerprints found for user abc.
<14>Aug 4 08:33:10 cloud-init: #####
<14>Aug 4 08:33:10 cloud-init: -----BEGIN SSH HOST KEY FINGERPRINTS-----
<14>Aug 4 08:33:10 cloud-init: 256 SHA256:3oA5kiJd69e5C/MDnD2E0qbphor74dWTU+igBDRLi4c root@ubuntu (
ECDSA)
<14>Aug 4 08:33:10 cloud-init: 256 SHA256:Y1mtKu6/uyVb8mMuKQ5eFfeyaQPLZBJQ1k62hMukGNc root@ubuntu (
ED25519)
<14>Aug 4 08:33:10 cloud-init: 3072 SHA256:iD+D2bHq/dvK8/cmvBo+WEMcxzzL5sqUfLzaoAKIas root@ubuntu
(RSA)
<14>Aug 4 08:33:10 cloud-init: -----END SSH HOST KEY FINGERPRINTS-----
<14>Aug 4 08:33:10 cloud-init: #####
-----BEGIN SSH HOST KEY KEYS-----
ecdsa-sha2-nistp256 AAAAE2VjZHNhLXNoYTItbmlzdHAyNTYAAAAIbmlzdHAyNTYAAABBBLnHwXd0JqNJs3CHtWQwdbTpea01
rNscHgVI285LMWvPhf4bTbE5iM7dy89TfN5m4d3G19fp8p2cNxs605n1Hyg= root@ubuntu
ssh-ed25519 AAAAC3NzaC1lZDI1NTE5AAAAIKD1pZHKqVCBQScpV+843gxzMxLe125ryYdNmNpFXM root@ubuntu
ssh-rsa AAAAB3NzaC1yc2EAAAADAQABAAQGC/jZ1tRplymAfbdgQ1/3aQcTS1zvJ6c0fKPY/EZgqF0s+fIc9b0+ZnZjS6Jcr
LzQq7DKtX0YxbgoD6K1KYI+BNQ1ycqdMvF4pXuSePz23nN7XocnuVTQQzNCXu4Vtq2kapBhAAkdVrG329SUIInui6zVWb0t0+F7cd
qbW1Y2JSGGhXM/fU7a/m50oprTo5NGEuAV6CrYs9jQ1Xj4cT114kFo3otYoGGyrQJwRm8cypv6L0XzayOxsSfKKD+04X0iBiWotu
KFNZqF8dpINTCMjMvpqUHkoDFex/Jw4TSzfN/JD+TW37MKFFDBqhpGI29jNI2eiqamhIaazBfXRIwVwSnW1Gxb0vaVhe/N3zmz3F
bXSJKwXPU8yiEMGQkcjLSC4eqQR24L5Iggc1rTakPX1Y1u0nX6yNWGgNpBq1LCMRwz3KVUtA0TxqcRPa5pI3l+wjakqjXwcCNru8
9JBtWgKg3ABImE7sogQ5/5bDVeGwhUj4/x8KghNaPzGPjmbk8= root@ubuntu
-----END SSH HOST KEY KEYS-----
[ 47.050517] cloud-init[1500]: Cloud-init v. 24.2-0ubuntu1~22.04.1 finished at Tue, 04 Aug 2026 08
:33:10 +0000. Datasource DataSourceNone. Up 47.04 seconds
```

3. ターゲットマシンサービスの設定

ip (192.168.56.102/24) を確認し、ssh を検査します

```

abc@ubuntu:~$ ip addr
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host
        valid_lft forever preferred_lft forever
2: enp0s3: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UP group default qlen 1000
    link/ether 08:00:27:d5:8b:1f brd ff:ff:ff:ff:ff:ff
    inet 192.168.56.102/24 metric 100 brd 192.168.56.255 scope global dynamic enp0s3
        valid_lft 409sec preferred_lft 409sec
    inet6 fe80::a00:27ff:fed5:8b1f/64 scope link
        valid_lft forever preferred_lft forever
abc@ubuntu:~$ systemctl status ssh
● ssh.service - OpenBSD Secure Shell server
   Loaded: loaded (/lib/systemd/system/ssh.service; enabled; vendor preset: enabled)
   Active: active (running) since Tue 2026-08-04 08:32:33 UTC; 6h ago
     Docs: man:sshd(8)
           man:sshd_config(5)
   Main PID: 854 (sshd)
     Tasks: 1 (limit: 2219)
    Memory: 2.9M
       CPU: 17ms
    CGroup: /system.slice/ssh.service
            └─854 "sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups"

Aug 04 08:32:33 ubuntu systemd[1]: Starting OpenBSD Secure Shell server...
Aug 04 08:32:33 ubuntu sshd[854]: Server listening on 0.0.0.0 port 22.
Aug 04 08:32:33 ubuntu sshd[854]: Server listening on :: port 22.
Aug 04 08:32:33 ubuntu systemd[1]: Started OpenBSD Secure Shell server.
abc@ubuntu:~$

```

その後、一時的に Ubuntu のネットワークカードを NAT モードに切り替え、更新後に端末で順にソフトウェアソースを更新します:

```
sudo apt update
```

Apache Web と MySQL データベースをワンクリックでインストールします:

```
sudo apt install -y apache2 mysql-server
```

Apache サービスを起動します:

```
sudo systemctl start apache2
```

すべて完了後、ポートの完了状況を確認します(注: netstat -tunlp は従来のコマンドであり、プリインストールが必要で、そうでない

と正常に使用できません。sudo ss -tunlp を使用してポート情報を確認できます)

```
abc@ubuntu:~$ netstat -tunlp
Command 'netstat' not found, but can be installed with:
sudo apt install net-tools
abc@ubuntu:~$ sudo ss -tunlp
Netid      State      Recv-Q     Send-Q      Local Address:Port      Peer Address:Port
Process
udp        UNCONN     0           0           127.0.0.53%lo:53        0.0.0.0:*
users:((("systemd-resolve",pid=1823,fd=13))
udp        UNCONN     0           0           10.0.2.15%enp0s3:68     0.0.0.0:*
users:((("systemd-network",pid=4388,fd=18))
tcp        LISTEN     0          4096         127.0.0.53%lo:53        0.0.0.0:*
users:((("systemd-resolve",pid=1823,fd=14))
tcp        LISTEN     0           128         0.0.0.0:22              0.0.0.0:*
users:((("sshd",pid=854,fd=3))
tcp        LISTEN     0           70          127.0.0.1:33060         0.0.0.0:*
users:((("mysqld",pid=3307,fd=21))
tcp        LISTEN     0          151         127.0.0.1:3306         0.0.0.0:*
users:((("mysqld",pid=3307,fd=23))
tcp        LISTEN     0          511         *:80                   *:80
users:((("apache2",pid=3714,fd=4),("apache2",pid=3713,fd=4),("apache2",pid=3712,fd=4))
tcp        LISTEN     0          128         [::]:22                [::]:22
users:((("sshd",pid=854,fd=4))
abc@ubuntu:~$
```

図からわかるように、22 番ポート (SSH サービス、任意のネットワークインターフェースが接続することを許可)、80 番ポート (Web サイトサービス、apache によってウェブページを送信)、3306 番ポート (MySQL データベース、他のプログラムがネットワークを介してこのデータベースを接続・操作できるようにする) がすべて正常に動作しています (注: Ubuntu 22.04 システムは MySQL をインストールする際、セキュリティ上の考慮から、デフォルトで bind-address を 127.0.0.1 に設定しており、ローカルマシンからのアクセスに限定されています)

4. 資産発見と安全スキャン

Ubuntu のネットワークカードを Host-only モードに切り替えます

Kali 仮想マシンに戻り、端末を開き、攻撃機でスキャンを行う準備

をします

nmap の役割はネットワーク全体をスキャンしてポートを発見し、脆弱性の有無を検査することです。ポートが多く開いているほど、潜在的な攻撃者が入り込める通路が多くなります。

Kali の端末に入力します:

```
nmap -sn 192.168.56.0/24
```

```
(abc@kali)-[~]
$ nmap -sn 192.168.56.0/24
Starting Nmap 7.99 ( https://nmap.org ) at 2026-08-05 01:42 +0000
mass_dns: warning: Unable to determine any DNS servers. Reverse DNS is disabled. Try using --system-dns or specify valid servers with --dns-servers
Nmap scan report for 192.168.56.1
Host is up (0.00017s latency).
MAC Address: 0A:00:27:00:00:04 (Unknown)
Nmap scan report for 192.168.56.100
Host is up (0.00021s latency).
MAC Address: 08:00:27:10:6E:11 (Oracle VirtualBox virtual NIC)
Nmap scan report for 192.168.56.102
Host is up (0.00018s latency).
MAC Address: 08:00:27:D5:8B:1F (Oracle VirtualBox virtual NIC)
Nmap scan report for 192.168.56.101
Host is up.
Nmap done: 256 IP addresses (4 hosts up) scanned in 2.32 seconds
```

続いて基礎スキャンを行います (最もよく使用される 1000 個のポートのみをスキャンします) :

```
nmap 192.168.56.102
```

```
(abc@kali)-[~]
$ nmap 192.168.56.102
Starting Nmap 7.99 ( https://nmap.org ) at 2026-08-05 01:45 +0000
mass_dns: warning: Unable to determine any DNS servers. Reverse DNS is disabled. Try using --system-dns or specify valid servers with --dns-servers
Nmap scan report for 192.168.56.102
Host is up (0.00013s latency).
Not shown: 998 closed tcp ports (reset)
PORT      STATE SERVICE
22/tcp    open  ssh
80/tcp    open  http
MAC Address: 08:00:27:D5:8B:1F (Oracle VirtualBox virtual NIC)
Nmap done: 1 IP address (1 host up) scanned in 0.17 seconds
```

さらに全ポートスキャンを行います (1 から 65535 までのすべて

のポートを強制的にスキャンします) :

`nmap -p- 192.168.56.102`

```
(abc@kali)-[~]
$ nmap -p- 192.168.56.102
Starting Nmap 7.99 ( https://nmap.org ) at 2026-08-05 01:46 +0000
mass_dns: warning: Unable to determine any DNS servers. Reverse DNS is disabled. Try using --system-dns or specify valid servers with --dns-servers
Nmap scan report for 192.168.56.102
Host is up (0.00011s latency).
Not shown: 65533 closed tcp ports (reset)
PORT      STATE SERVICE
22/tcp    open  ssh
80/tcp    open  http
MAC Address: 08:00:27:D5:8B:1F (Oracle VirtualBox virtual NIC)
Nmap done: 1 IP address (1 host up) scanned in 1.96 seconds
```

Ubuntu 上で有効になっているサービスとバージョンをスキャンします (バージョン番号を取得した後、脆弱性データベースに行つてこのバージョンの既知の脆弱性を検索し、これを利用して攻撃を行うことができます) :

`nmap -sV 192.168.56.102`

```
(abc@kali)-[~]
$ nmap -sV 192.168.56.102
Starting Nmap 7.99 ( https://nmap.org ) at 2026-08-05 01:50 +0000
mass_dns: warning: Unable to determine any DNS servers. Reverse DNS is disabled. Try using --system-dns or specify valid servers with --dns-servers
Nmap scan report for 192.168.56.102
Host is up (0.00010s latency).
Not shown: 998 closed tcp ports (reset)
PORT      STATE SERVICE VERSION
22/tcp    open  ssh      OpenSSH 8.9p1 Ubuntu 3ubuntu0.10 (Ubuntu Linux; protocol 2.0)
80/tcp    open  http     Apache httpd 2.4.52 ((Ubuntu))
MAC Address: 08:00:27:D5:8B:1F (Oracle VirtualBox virtual NIC)
Service Info: OS: Linux; CPE: cpe:/o:linux:linux_kernel

Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 6.47 seconds
```

オペレーティングシステムの識別を行います (ターゲットマシンがLinux であるかどうかを検出します) :

`sudo nmap -O 192.168.56.102` (-O は英大文字の O を使用しており、数字の 0 ではありません)


```

(abc@kali)-[~]
$ sudo nmap -O 192.168.56.102
Starting Nmap 7.99 ( https://nmap.org ) at 2026-08-05 01:57 +0000
mass_dns: warning: Unable to determine any DNS servers. Reverse DNS is disabled. Try using --system-dns or specify valid servers with --dns-servers
Nmap scan report for 192.168.56.102
Host is up (0.00025s latency).
Not shown: 998 closed tcp ports (reset)
PORT      STATE SERVICE
22/tcp    open  ssh
80/tcp    open  http
MAC Address: 08:00:27:D5:8B:1F (Oracle VirtualBox virtual NIC)
Device type: general purpose|router
Running: Linux 4.X|5.X, MikroTik RouterOS 7.X
OS CPE: cpe:/o:linux:linux_kernel:4 cpe:/o:linux:linux_kernel:5 cpe:/o:mikrotik:routeros:7 cpe:/o:linux:linux_kernel:5.6.3
OS details: Linux 4.15 - 5.19, OpenWrt 21.02 (Linux 5.4), MikroTik RouterOS 7.2 - 7.5 (Linux 5.6.3)
Network Distance: 1 hop

OS detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 1.54 seconds

```

脆弱性検出スクリプト(Nmap の自動スクリプトを使用してリスクを検出します) :

`nmap --script vuln 192.168.56.102`

```

(abc@kali)-[~]
$ nmap --script vuln 192.168.56.102
Starting Nmap 7.99 ( https://nmap.org ) at 2026-08-05 01:59 +0000
mass_dns: warning: Unable to determine any DNS servers. Reverse DNS is disabled. Try using --system-dns or specify valid servers with --dns-servers
Stats: 0:00:21 elapsed; 0 hosts completed (1 up), 1 undergoing Script Scan
NSE Timing: About 99.51% done; ETC: 02:00 (0:00:00 remaining)
Nmap scan report for 192.168.56.102
Host is up (0.000075s latency).
Not shown: 998 closed tcp ports (reset)
PORT      STATE SERVICE
22/tcp    open  ssh
80/tcp    open  http
|_http-csrf: Couldn't find any CSRF vulnerabilities.
|_http-dombased-xss: Couldn't find any DOM based XSS.
|_http-stored-xss: Couldn't find any stored XSS vulnerabilities.
MAC Address: 08:00:27:D5:8B:1F (Oracle VirtualBox virtual NIC)

Nmap done: 1 IP address (1 host up) scanned in 22.12 seconds

```


5. 安全加固

Ubuntu 仮想マシンに戻ります

SSH サービスの安全加固 (ポート変更、root ログイン禁止)

SSH 設定ファイルを開きます:

```
sudo nano /etc/ssh/sshd_config
```

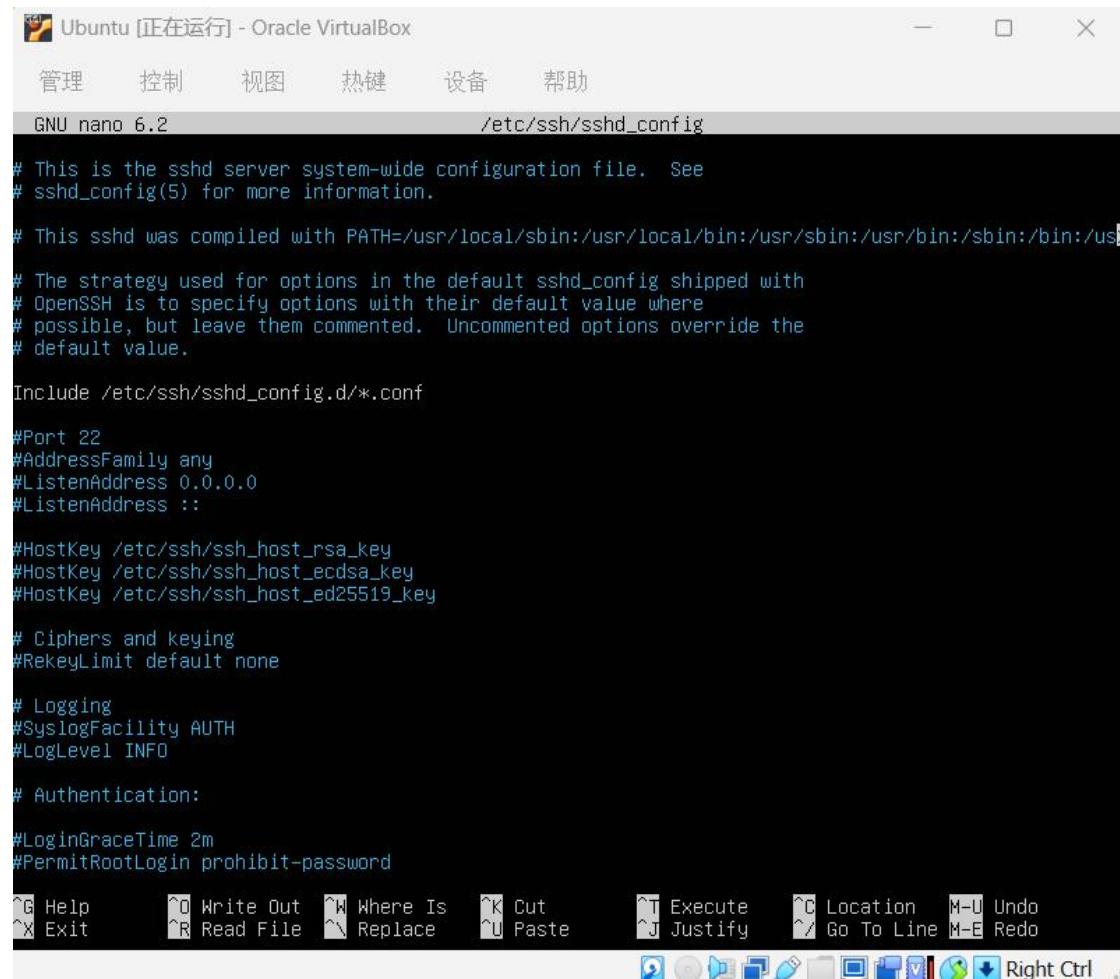

```
GNU nano 6.2 /etc/ssh/sshd_config

# This is the sshd server system-wide configuration file. See
# sshd_config(5) for more information.

# This sshd was compiled with PATH=/usr/local/sbin:/usr/local/bin:/usr/sbin:/usr/bin:/sbin:/bin:/usr/sbin:/usr/bin

# The strategy used for options in the default sshd_config shipped with
# OpenSSH is to specify options with their default value where
# possible, but leave them commented. Uncommented options override the
# default value.

Include /etc/ssh/sshd_config.d/*.conf

#Port 22
#AddressFamily any
#ListenAddress 0.0.0.0
#ListenAddress ::

#HostKey /etc/ssh/ssh_host_rsa_key
#HostKey /etc/ssh/ssh_host_ecdsa_key
#HostKey /etc/ssh/ssh_host_ed25519_key

# Ciphers and keying
#RekeyLimit default none

# Logging
#SyslogFacility AUTH
#LogLevel INFO

# Authentication:

#LoginGraceTime 2m
#PermitRootLogin prohibit-password
```

直接修正すればよいです:

```
Port 2222
```

```
PermitRootLogin no
```


sudo ufw deny 80/tcp

sudo ufw enable

sudo ufw status

```
abc@ubuntu:~$ sudo ufw allow 2222/tcp
Rules updated
Rules updated (v6)
abc@ubuntu:~$ sudo ufw deny 80/tcp
Rules updated
Rules updated (v6)
abc@ubuntu:~$ sudo ufw enable
Firewall is active and enabled on system startup
abc@ubuntu:~$ sudo ufw status
Status: active

To Action From
--
2222/tcp ALLOW Anywhere
80/tcp DENY Anywhere
2222/tcp (v6) ALLOW Anywhere (v6)
80/tcp (v6) DENY Anywhere (v6)
```

Apache サービスバージョンを非表示にします

Apache 安全設定ファイルに入ります:

sudo nano /etc/apache2/conf-enabled/security.conf

```
GNU nano 6.2 /etc/apache2/conf-enabled/security.conf
# Debian packages.
#
#<Directory />
#   AllowOverride None
#   Require all denied
#</Directory>

# Changing the following options will not really affect the security of the
# server, but might make attacks slightly more difficult in some cases.
#
# ServerTokens
# This directive configures what you return as the Server HTTP response
# Header. The default is 'Full' which sends information about the OS-Type
# and compiled in modules.
# Set to one of: Full | OS | Minimal | Minor | Major | Prod
# where Full conveys the most information, and Prod the least.
#ServerTokens Minimal
ServerTokens OS
#ServerTokens Full

#
# Optionally add a line containing the server version and virtual host
# name to server-generated pages (internal error documents, FTP directory
# listings, mod_status and mod_info output etc., but not CGI generated
# documents or custom error documents).
# Set to "EMail" to also include a mailto: link to the ServerAdmin.
# Set to one of: On | Off | EMail
#ServerSignature Off
ServerSignature On

#
^G Help      ^O Write Out ^W Where Is  ^K Cut       ^T Execute   ^C Location  M-U Undo
^X Exit      ^R Read File ^N Replace   ^U Paste     ^J Justify   ^_ Go To Line M-E Redo
```

変更:

ServerTokens Prod

ServerSignature Off

```
GNU nano 6.2 /etc/apache2/conf-enabled/security.conf *
# Debian packages.
#
#<Directory />
#   AllowOverride None
#   Require all denied
#</Directory>

# Changing the following options will not really affect the security of the
# server, but might make attacks slightly more difficult in some cases.
#
# ServerTokens
# This directive configures what you return as the Server HTTP response
# Header. The default is 'Full' which sends information about the OS-Type
# and compiled in modules.
# Set to one of: Full | OS | Minimal | Minor | Major | Prod
# where Full conveys the most information, and Prod the least.
#ServerTokens Minimal
ServerTokens Prod
#ServerTokens Full

#
# Optionally add a line containing the server version and virtual host
# name to server-generated pages (internal error documents, FTP directory
# listings, mod_status and mod_info output etc., but not CGI generated
# documents or custom error documents).
# Set to "EMail" to also include a mailto: link to the ServerAdmin.
# Set to one of: On | Off | EMail
#ServerSignature Off
ServerSignature Off

#
^G Help      ^O Write Out  ^W Where Is   ^K Cut        ^T Execute    ^C Location   M-U Undo
^X Exit      ^R Read File  ^N Replace    ^U Paste      ^J Justify    ^_ Go To Line  M-E Redo
```

保存して終了した後、Apache を再起動します:

sudo systemctl restart apache2

6. 二次スキャン

kali 端末内でポートスキャンを行います

```
(abc@kali)-[~]
$ nmap -p- 192.168.56.102
Starting Nmap 7.99 ( https://nmap.org ) at 2026-08-05 03:13 +0000
mass_dns: warning: Unable to determine any DNS servers. Reverse DNS is disabl
ed. Try using --system-dns or specify valid servers with --dns-servers
Stats: 0:00:11 elapsed; 0 hosts completed (1 up), 1 undergoing SYN Stealth Sc
an
SYN Stealth Scan Timing: About 0.72% done
Stats: 0:01:45 elapsed; 0 hosts completed (1 up), 1 undergoing SYN Stealth Sc
an
SYN Stealth Scan Timing: About 7.16% done; ETC: 03:37 (0:22:42 remaining)
```

```
(abc@kali)-[~]
$ nmap -p 22,80,2222,3306 192.168.56.102
Starting Nmap 7.99 ( https://nmap.org ) at 2026-08-05 03:26 +0000
mass_dns: warning: Unable to determine any DNS servers. Reverse DNS is disabled. Try using --system-dns or specify valid servers with --dns-servers
Nmap scan report for 192.168.56.102
Host is up (0.00025s latency).

PORT      STATE      SERVICE
22/tcp    filtered  ssh
80/tcp    filtered  http
2222/tcp  open      EtherNetIP-1
3306/tcp  filtered  mysql
MAC Address: 08:00:27:D5:8B:1F (Oracle VirtualBox virtual NIC)

Nmap done: 1 IP address (1 host up) scanned in 1.62 seconds
```

Ubuntu に切り替えてファイアウォールルールを変更し、80 番ポートを開放します:

`sudo ufw allow 80/tcp`

```
abc@ubuntu:~$ sudo ufw allow 80/tcp
[sudo] password for abc:
Rule updated
Rule updated (v6)
abc@ubuntu:~$ sudo ufw enable
Firewall is active and enabled on system startup
abc@ubuntu:~$
```

kali でバージョン検出スキャンを行います:

`nmap -sV -p 80,2222 192.168.56.102`

```
(abc@kali)-[~]
$ nmap -sV -p 80,2222 192.168.56.102
Starting Nmap 7.99 ( https://nmap.org ) at 2026-08-05 05:57 +0000
mass_dns: warning: Unable to determine any DNS servers. Reverse DNS is disabled. Try using --system-dns or specify valid servers with --dns-servers
Nmap scan report for 192.168.56.102
Host is up (0.00027s latency).

PORT      STATE      SERVICE      VERSION
80/tcp    open      http         Apache httpd
2222/tcp  open      ssh          OpenSSH 8.9p1 Ubuntu 3ubuntu0.10 (Ubuntu Linux; protocol 2.0)
MAC Address: 08:00:27:D5:8B:1F (Oracle VirtualBox virtual NIC)
Service Info: OS: Linux; CPE: cpe:/o:linux:linux_kernel

Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 6.38 seconds
```