

# R Markdown Template

Robin Doe

2025-9-1

## R environment (renv)

Using `renv` while writing your tutorial will ensure that when a LingMethodsHub maintainer renders your tutorial, all of the necessary packages will be installed. Even if you've already been working on the tutorial, you can start using `renv` like so:

```
renv::init()
renv::snapshot()
```

This will create an `renv/` directory, and an `renv.lock` file. You should add `renv.lock` to git.

Once you've run through all of the code for your tutorial again, just run `renv::snapshot()` one more time before you push your final commit.

## Sample R Markdown Template

```
renv::use(lockfile = "renv.lock")
```

\* The library is already synchronized with the lockfile.


```
library(tidyverse)
library(palmerpenguins)
```

```
library(showtext)
library(khroma)
font_add_google("Atkinson Hyperlegible", "atkinson")
```

```
showtext_auto()
```

```
palmerpenguins::penguins %>%  
  ggplot(aes(flipper_length_mm, body_mass_g, color = species))+  
  geom_point()+  
  scale_color_bright()+  
  theme_minimal()+  
  theme(text = element_text(family = "atkinson"))
```

Warning: Removed 2 rows containing missing values (geom\_point).

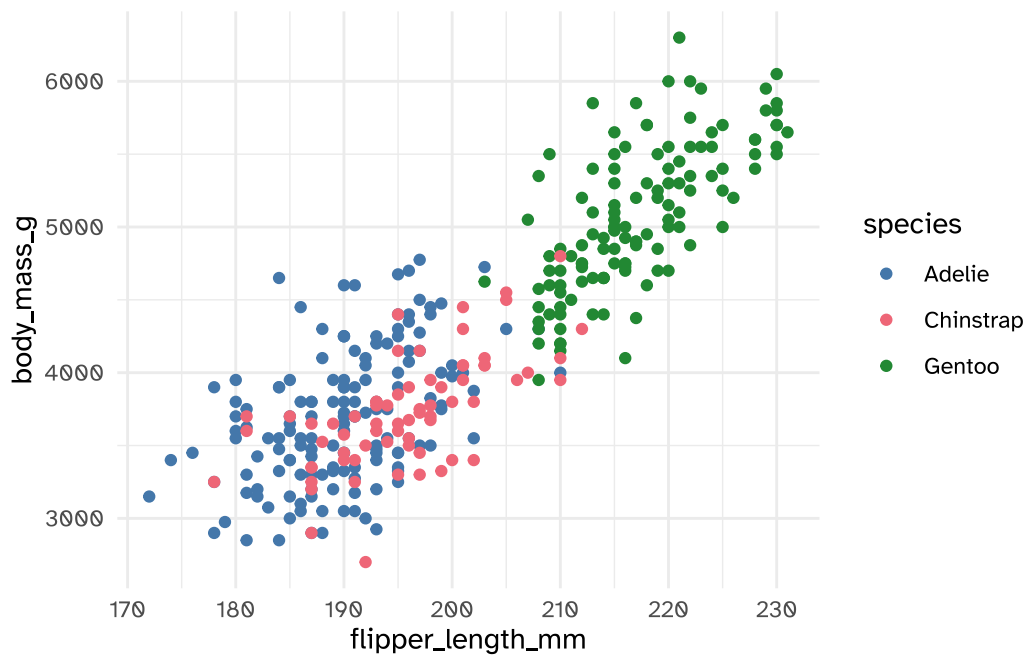

[00\\_rmarkdown\\_template.pdf](#)