
## 函数组合子



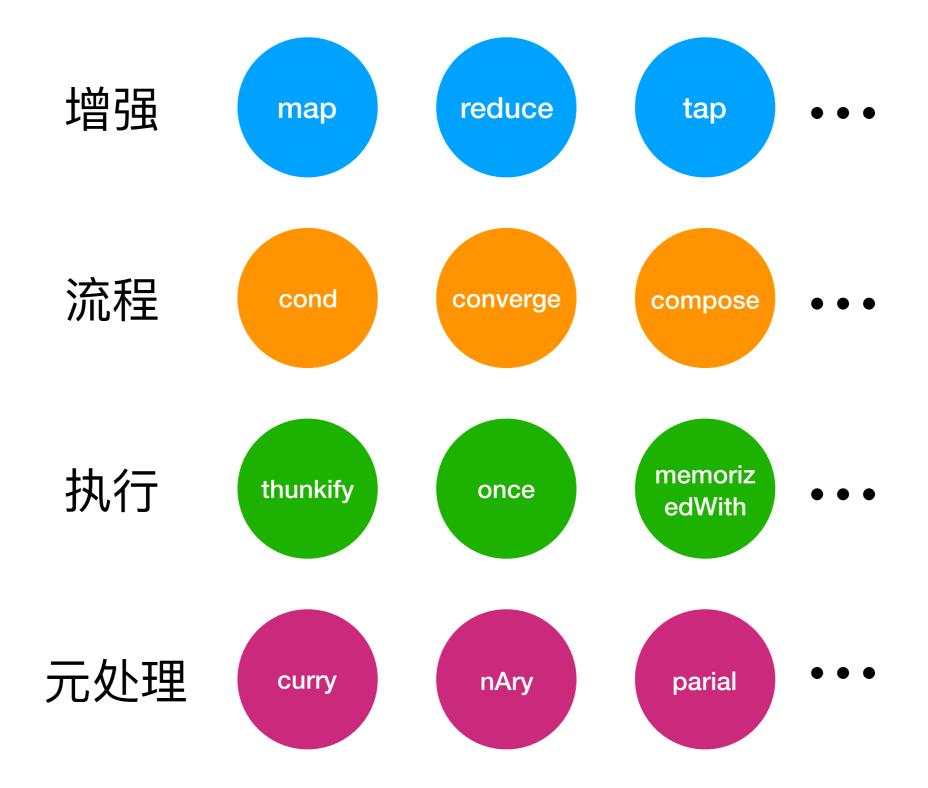

```
export default nf(
  '$section$',
 whenPropSatisfies('listModules', isSectionModule, _.over(
    lensProps(['listModules']),
   _.pipe(
      as('sectionDataState', createState([])),
      _.tap(_.converge(fetchSections, [
        _.pipe(_.prop('listModules'), _.filter(isSectionModule),
_.filter(hasConfigUrl)),
       __path(['sectionDataState', 'set'])
      1)).
      _.converge(_.reduce(_.pipe(
        __zipObj(['listModules', 'section']),
        insertSectionModules
      )), [
       _ prop('listModules'),
        _ path(['sectionDataState', 'value'])
      _.objOf('listModules')
```