



King Saud University

College of Computer and Information Sciences

Department of Computer Science

**Data Structures CSC 212**

**Final Exam - Spring 2021**

Date: 24/04/2021

Duration: 3 hours

Question 1 ..... 12 points

Choose the most appropriate data structure for each of the following tasks.

- |                |              |                     |                |                |           |
|----------------|--------------|---------------------|----------------|----------------|-----------|
| A. LinkedList  | B. ArrayList | C. DoubleLinkedList | D. LinkedQueue | E. AVL         | F. Stack  |
| G. ArrayQueue. | H. BST.      | I. LinkedPQueue.    | J. BPlusTree.  | K. HeapPQueue. | L. Graph. |

1. An electronic book reader (e-reader) that allows users to easily flip through pages. **DoubleLinkedList**  
*لأنه امام وخلف*
2. An online store that displays items in a least-expensive to most-expensive order. **LinkedPQueue**  
*order: either heap PQ or linked PQ → compare time complexity*
3. A text processing program that prints out strings in a reversed order. **Stack**  
*if store heap if display linked PQ*
4. A database management system that stores high-demand magazine articles. **BPlusTree**
5. A social network platform that verifies whether a given username is available or taken. **AVL**  
*Social networks use graphs, but the operation I have عملية بحث in usernames, so use AVL*
6. A food delivery application that helps its drivers deliver multiple orders in the shortest time possible. **Graph**

Question 2 ..... 12 points

Write the method `greaterThanK` which receives a list of integers  $l$  and a number  $k$ . The method should return a new list containing all the integers in  $l$  that are greater than  $k$ . If there is no integer in  $l$  higher than the value  $k$ , then the method should display an appropriate message and returns an empty list.

**Example 1.** if List  $l$ :  $[1\ 2\ 3\ 4\ 5\ 6\ 7\ 8\ 9]$  and  $k = 5$ .

Then, the method should return the list:  $[6\ 7\ 8\ 9]$

```

1 public static LinkedList<Integer> greaterThanK(LinkedList<Integer> l, int k) {
2     LinkedList<Integer> nl = new LinkedList<Integer>();
3     if (...)
4         System.out.println("List is empty");
5     else {
6         ...
7         while (...){
8             if(...)
9                 nl.insert(...);
10            ...
11        }
12        if(...)
13            nl.insert(...);
14        if (...)
15            System.out.println("no value in l is greater than k");
16    }
17    return ...;
18 }

```

*على كل الليست الا آخر عنصر*

*على آخر عنصر*

*اذا كانت خاضية*

1. Line 3:  

(A) 1.hasNext()

(B) 1.empty()

(C) 1.full()

(D) 1.last()

(E) None

2. Line 6:  

(A) nl.findNext();

(B) nl.findFirst();

(C) 1.findNext();

(D) 1.findFirst();

(E) None

3. Line 7:  

(A) 1.retrieve()>= k

(B) 1.retrieve() != k

(C) 1.last()

(D) !1.last()

(E) None

4. Line 8:  

(A) 1.retrieve()>= k

(B) 1.retrieve()>k

(C) nl.retrieve();

(D) 1.retrieve();

(E) None

5. Line 9:  

(A) nl.retrieve()

(B) 1.retrieve() != null

(C) k

(D) 1.retrieve()

(E) None

6. Line 10:  

(A) nl.findNext();

(B) 1.findNext();

(C) nl.remove();

(D) 1.remove();

(E) None

7. Line 12:  

(A) 1.retrieve()>= k

(B) 1.retrieve()>k

(C) nl.retrieve();

(D) 1.retrieve();

(E) None

8. Line 13:  

(A) nl.retrieve()

(B) 1.retrieve() != null

(C) 1.retrieve()

(D) k

(E) None

9. Line 14:  

(A) 1.empty()

(B) 1.full()

(C) nl.full()

(D) nl.empty()

(E) None

10. Line 17:  

(A) 1;

(B) nl;

(C) 1.retrieve();

(D) n

(E) None
- النتيجة
- Question 3..... 14 points
- (a) Write the method `public void trim(int l)`, member of the class `BT`, which removes all nodes that are at level `l` or deeper. We follow the convention that the root is at level `0`. Assume that `l > 0`.

```

1 public void trim(int l) {
2     ...
3 }
4 private ... recTrim(...) {
5     if (...)
6         ...
7     if (...) {
8         ...
9         ...
10    } else {
11        ...
12        ...
13    }
14 }

```



1. Line 2:

- (A) recTrim(root);
- (B) recTrim(root, 1);
- (C) recTrim(null);
- (D) recTrim(root, root);
- (E) None

الروت + رقم الليفل  
اللي بقطع من عنده

2. Line 4:

- (A) private void recTrim(BTNode<T> t, int l){
- (B) private boolean recTrim(BTNode<T> t){
- (C) private void recTrim(BTNode<T> t){
- (D) private void recTrim(BTNode<T> t1, BTNode<T> t2){
- (E) None

المؤشر اللي يتحرك  
معي لما انزل + رقم الليفل  
اللي بقطع من عنده

3. Line 5:

- (A) if (t.data == 1)
- (B) if (t == null)
- (C) if (l == null)
- (D) if (t1 == null || t2 == null)
- (E) None

4. Line 6:

- (A) return t1.data.equals(1) || t2.data.equals(1);
- (B) return true;
- (C) return;
- (D) recTrim(t);
- (E) None

5. Line 7:

- (A) if (l == 1){

- (B) if (t1.data == 1 || t2.data == 1){
- (C) if (t.data == 1){
- (D) if (l == 0){
- (E) None

6. Line 8:

- (A) t.data = null;
- (B) t1.left = null;
- (C) t.left = t.right;
- (D) t.left = null;
- (E) None

7. Line 9:

- (A) t2.right = null;
- (B) t.data = null;
- (C) t.right = t.left;
- (D) t.right = null;
- (E) None

8. Line 11:

- (A) recTrim(t.left);
- (B) recTrim(t);
- (C) recTrim(t1.left, t1.right);
- (D) recTrim(t.left, l - 1);
- (E) None

9. Line 12:

- (A) recTrim(t.right, l - 1);
- (B) recTrim(t.right);
- (C) recTrim(t2.left, t2.right);

- (D) recTrim(t);

(E) None

(b) Write the method `public static <T> void setNull(BT<T> bt, int l)`, user of the class BT, which sets to null the data of all nodes that are at level `l` or deeper. We follow the convention that the root is at level `0`.

```
1 public static <T> void setNull(BT<T> bt, int l) {
2     if (...)
3         ...
4     ...
5     ...
6 }
7 private static <T> ... recSetNull(...) {
8     if (...)
9         ...
10    if (...) {
11        ...
12        ...
13    }
14    if (...) {
15        ...
16        ...
17    }
18 }
```

1. Line 2:

(A) if (bt.retrieve()== 1)

(B) if (bt.full())

(C) if (bt.find(l))

(D) if (bt.empty())

(E) None
2. Line 3:

(A) return bt.level();

(B) bt.update(l);

(C) return;

(D) return bt.retrieve()== 1;

(E) None
3. Line 4:

(A) recSetNull(bt);

(B) recSetNull(bt, l);

(C) bt.find(Relative.Parent);

(D) bt.find(Relative.LeftChild);

(E) None

bt.find(Relative.Root);
4. Line 5:

(A) bt.find(Relative.RightChild);

(B) recSetNull(bt, l);

(C) bt.find(l);

- (D) bt.find(Relative.Root);

(E) None
5. Line 7:

(A) private static <T> void recSetNull(BT<T> bt){

(B) private static <T> void recSetNull(BT<T> bt, int l){

(C) private static <T> boolean recSetNull(BT<T> > bt){

(D) private static <T> void recSetNull(int l){

(E) None
6. Line 8:

(A) if (l <= 0)

(B) if (bt == null)

(C) if (bt.level()== l)

(D) if (l > 0)

(E) None
7. Line 9:

(A) bt.remove();

(B) bt.update(null);

(C) bt.update(l);

(D) bt.insert(null);

3  
2  
1  
6

- (E) None
8. Line 10:
- (A) if (bt.find(Relative.Parent)){
- (B) if (bt.retrieve()== 1)){
- (C) if (bt.find(Relative.Root)){
- (D) if (bt.find(Relative.LeftChild)){
- (E) None
9. Line 11:
- (A) recSetNull(bt);
- (B) recSetNull(1 - 1);
- (C) bt.find(Relative.Parent);
- (D) recSetNull(bt, 1 - 1); *عني نزلت مستوى*
- (E) None
10. Line 12:
- (A) recSetNull(1);
- (B) recSetNull(bt);
- (C) bt.find(Relative.Root); *بعد ما يخلص شغل*
- (D) bt.find(Relative.Parent); *ارجعه للروت*
- (E) None

11. Line 14:
- (A) if (bt.find(Relative.Parent)){
- (B) if (bt.retrieve()== 1)){
- (C) if (bt.find(Relative.Root)){
- (D) if (bt.find(Relative.RightChild)){
- (E) None
12. Line 15:
- (A) bt.find(Relative.Parent);
- (B) recSetNull(bt, 1 - 1);
- (C) recSetNull(bt);
- (D) recSetNull(1 - 1);
- (E) None
13. Line 16:
- (A) bt.find(Relative.Parent);
- (B) bt.find(Relative.Root);
- (C) recSetNull(1);
- (D) recSetNull(bt);
- (E) None

Question 4 ..... 14 points

Choose the most appropriate answer.

1. Consider an array A representing a min-heap with 1024 nodes, where the root is stored at position 1.

Which of the following is **necessarily** true?

- (A)  $A[3] \leq A[1024]$ . (B)  $A[3] \geq A[1024]$ . (C)  $A[3] \neq A[1024]$ . (D)  $A[3] == A[1024]$ . (E) None.

2. Suppose  $T$  is a binary tree with 128 nodes and height 9 (an empty tree has height 0). Which of the following is **necessarily** false?

- (A)  $T$  is a complete tree. (B)  $T$  is a min-heap. (C)  $T$  is a max-heap. (D) A, B, and C.

(E) None.

3. Which traversal algorithm visits the nodes of a max-heap in decreasing order?


- (A) Pre-order (B) In-order (C) Post-order (D) BFS (E) DFS (F) None

4. You have a min-heap of size 63 with the key 1 at root. You insert another key 1, and sift-up stops immediately without doing any swaps. After this insert, the number of keys equal to 1 in the heap is:

- (A) 2. (B) At least 7. (C) At most 7. (D) At most 6. (E) None

5. Given the heap  $H = [2, 9, 8, 13, 11, 17, 14]$ , what is  $H$  after inserting 3 and then 7?

- (A) 2, 3, 8, 7, 13, 9, 11, 14, 17 (B) 2, 3, 8, 7, 11, 17, 14, 9, 13 (C) 2, 3, 7, 8, 9, 11, 13, 14, 17



(D) 2, 3, 7, 9, 11, 8, 14, 17, 13 (E) None

6. Given the heap  $H = [1, 5, 2, 8, 7, 16, 10]$ , what is  $H$  after deleting one key?

(A) 2, 10, 8, 5, 7, 16 (B) 2, 5, 7, 8, 10, 16 (C) 2, 5, 8, 7, 16, 10 (D) 2, 5, 10, 8, 7, 16

(E) None

7. Given the heap  $H = [2, 4, 7, 9, 17, 10, 15, 11]$ , what is  $H$  after deleting two keys?

(A) 2, 4, 7, 9, 17, 10. (B) 7, 9, 10, 11, 17, 15. (C) 7, 9, 17, 10, 15, 11. (D) 7, 9, 10, 11, 15, 17.

(E) None

Question 5 ..... 14 points

Choose the most appropriate answer:

**Remark 1.** Follow the the conventions:

- The height of an empty tree is 0.
- When necessary, replace with the smallest key in the right sub-tree.

1. The maximum height of an AVL tree with 7 nodes is: try by drawing

(A) 1. (B) 2. (C) 3. (D) 4. (E) 5.





2. The minimum number of rotations caused after inserting a node into an AVL tree with  $n$  nodes and height  $h$  is (a single rotation is counted 1; a double rotation is counted 2):

(A) 0. (B) 1. (C) 2. (D)  $h$  (E)  $n$ .





3. The worst case run time for delete in an AVL tree is:


(A)  $O(1)$ . (B)  $O(n)$ . (C)  $O(\log n)$ . (D)  $O(n \log n)$  (E)  $O(n^2)$ .

4. After inserting the key 17 in the AVL


(A)  (B)  (C)  (D)  (E) None

5. After inserting the key 20 in the AVL

(A)  (B)  (C)  (D)  (E) None

6. After deleting the key 4 from the AVL , the tree becomes: (Replace with smallest key in right subtree)

المفتر تعتبر نفس اشارة اللي فوقها



Question 6 ..... 14 points

Choose the most appropriate answer:

1. What is a hash function?

- (A) A function that allocates memory to keys      (B) A function that computes the location of the key in the array  
 (C) A function that creates an array      (D) A function that computes the location of the values in the array  
 (E) None

2. A hash table of size 10 uses open addressing with hash function  $h(k) = k \bmod 10$ , and linear re-hashing with  $c = 1$ . The figure below shows the table after inserting 6 keys. Which one of the following choices gives a possible order in which the key values could have been inserted in the table?

By trying the options

0	
1	
2	42
3	23
4	34
5	52
6	46
7	33
8	
9	

0  $46 \times 10 = 6$   
 1  $34 \times 10 = 4$   
 2 42  $42 \times 10 = 2$   
 3 23  $23 \times 10 = 3$   
 4 34  $52 \times 10 = 2$   
 5 52  $33 \times 10 = 3$   
 6 46  
 7 33  
 8

✓

- ✖ (A) 46, 42, 34, 52, 23, 33 ✖ (B) 34, 42, 23, 52, 33, 46 (C) 46, 34, 42, 23, 52, 33 (D) 42, 46, 33, 23, 34, 52 (E) None of the above.

3. Given the following keys (4<sup>2</sup>322, 1<sup>4</sup>334, 147<sup>1</sup>1, 9<sup>9</sup>679, 198<sup>9</sup>9, 617<sup>1</sup>1, 617<sup>3</sup>3, 419<sup>9</sup>9) and the hash function  $\text{key} \bmod 10$ , which of the following statements are true?

- i. 9679, 1989, 4199 hash to the same value. ii. 1471, 6171 hash to the same value. iii. All keys hash to the same value. iv. Each key hashes to a different value.

- (A) i only    (B) ii only    (C) i and ii only    (D) iii or iv    (E) None of the above.

4. What is the worst case search time of a hashing using separate chaining?

- (A)  $O(1)$     (B)  $O(\log n)$     (C)  $O(n)$     (D)  $O(n \log n)$     (E) None of the above.

7  
14  
21  
28  
35  
42

19  
56  
63  
70  
77  
84 91 98

5. Consider the following hash function: select the two rightmost digits then apply mod 7 on the corresponding number. Which of the following couples of keys cause a collision?

(A) 3848 and 4756    (B) 3973 and 1258    (C) 162 and 35476    (D) All of the above.    (E) None of the above.

$$48 \times 7 = 6$$

$$56 \times 7 = 0$$

$$73 \times 7 = 3$$

$$58 \times 7 = 2$$

$$62 \times 7 = 6$$

$$76 \times 7 = 6$$

6 and 6 cause a collision

Question 7 ..... 14 points

Choose the most appropriate answer (in questions 2 to 7 below,  $m = l = 3$ ):


LEAF: min:  $\lceil \frac{m}{2} \rceil$  max:  $m$

NON-LEAF: min:  $\lceil \frac{m}{2} \rceil - 1$  max:  $m - 1$


1. The leaves of a B+ tree of order 4 can contain the following number of elements (suppose  $l = m$ ):

(A) 3 to 4 elements    (B) 2 to 4 elements    (C) 1 to 4 elements    (D) 4 to 4 elements    (E) None

2. After inserting the key 7 in the B+ tree



(A) [5 | ]    (B) [5 | 6]    (C) [6 | ]    (D) [7 | ]    (E) None




3. After inserting the key 14 in the B+ tree becomes:

, the root of the tree

No change!


(A) [7 | 11]    (B) [7 | 10]    (C) [6 | ]    (D) [8 | ]    (E) None



4. After inserting the key 10 in the B+ tree becomes:

, the root of the tree

(A) [5 | 10]    (B) [7 | 11]    (C) [7 | 10]    (D) [7 | 9]    (E) None



5. After deleting the key 9 from the B+ tree becomes:

, the root of the tree

(A) [8 | ]    (B) [7 | 11]    (C) [7 | 10]    (D) [7 | 9]    (E) None



6. After deleting the key 12 from the B+ tree becomes:

- (A)

8
- (B)

7

11
- (C)

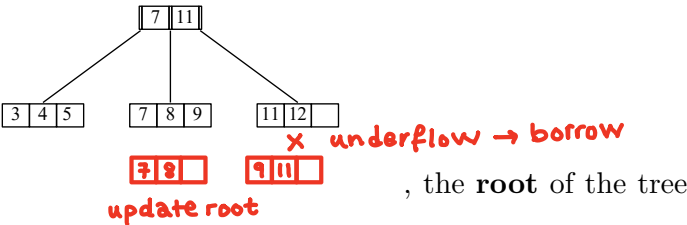
7

10
- (D)

7

9
- (E)

None



7. After deleting the key 11 from the B+ tree becomes:

- (A)

7
- (B)

7

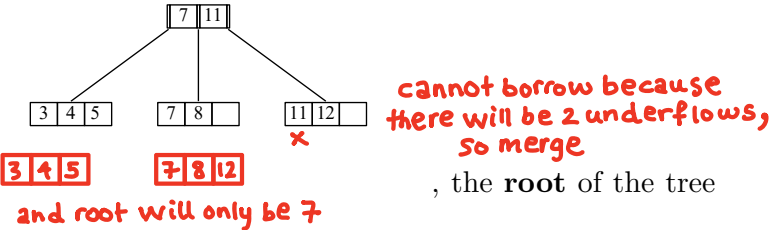
12
- (C)

7

8
- (D)

12
- (E)

None



Question 8 ..... 6 points

(a) (2 points) Choose the most appropriate answer:

1. What is the least number of edges a graph with 50 nodes must have to be connected?

(A) 50.

(B) 51.

(C) 49.

(D) 100.

(E) None.
2. When searching for a node (not too far from the source node) in a graph, which of the following is true?

(A) DFS is more appropriate than BFS.

(B) BFS is more appropriate than DFS.

(C) DFS is not suitable at all for this case.

(D) BFS is not suitable at all for this case.

(E) None.
- (b) (4 points) Given the following graph adjacency list, answer the questions below.
- |   |             |
|---|-------------|
| A | → C → D     |
| B | → D → E → F |
| C | → A → F     |
| D | → A → B     |
| E | → B → F     |
| F | → B → C → E |
1. Which of the following sequences are paths in this graph? Answer by T (true) or F (false).
- (a) (A, D, B, E, F) T
- (b) (D, B, F, A) F

(c) (E, B, F, C, D) F

(d) (C, F, B, D, A) T
2. Answer by T (true) or F (false).
- (a) The number of edges in this graph is 6. F **7**

(b) The graph can accept new unique edges. T **A → B many unique edges can be added**

(c) In the graph, (A, C, F, B, A) is a cycle. F **There is no edge between B and A**
- AKFOBE

using queue

ما فيه نود مرمية  
✓ حاليا

(d) The graph is connected. T

3. Which of the following is true for this graph ?

- (A) The graph is disconnected. (B) The graph has no cycles. (C) The graph is connected and has no cycles. (D) The graph has cycles. (E) None.

cycle: B, F, E, B

4. The BFS traversal of this graph starting from node C is (insert neighbors in the data structure in increasing alphabetic order):

- (A) C, F, D, B, E, A. (B) C, A, D, B, E, F. (C) C, A, F, D, B, E. (D) C, F, E, B, D, A. (E) None.