

Learning Rmarkdown

Linnea Sandell

October 04, 2020

Contents

Header 1	1
Subheading 1A	1
Header 2	1
Subheading 2A	1
Subheading 2B	1
R Markdown	1
Including Plots	2

Header 1

Subheading 1A

Header 2

Subheading 2A

Subheading 2B

R Markdown

This is an R Markdown document. Markdown is a simple formatting syntax for authoring HTML, PDF, and MS Word documents. For more details on using R Markdown see <http://rmarkdown.rstudio.com>.

When you click the **Knit** button a document will be generated that includes both content as well as the output of any embedded R code chunks within the document. You can embed an R code chunk like this:


```
summary(cars)
```

```
##      speed      dist
##  Min.   : 4.0    Min.   :  2.00
##  1st Qu.:12.0    1st Qu.: 26.00
##  Median :15.0    Median : 36.00
```

```
## Mean   :15.4   Mean    : 42.98
## 3rd Qu.:19.0   3rd Qu.: 56.00
## Max.   :25.0   Max.    :120.00
```

Including Plots

You can also embed plots, for example:

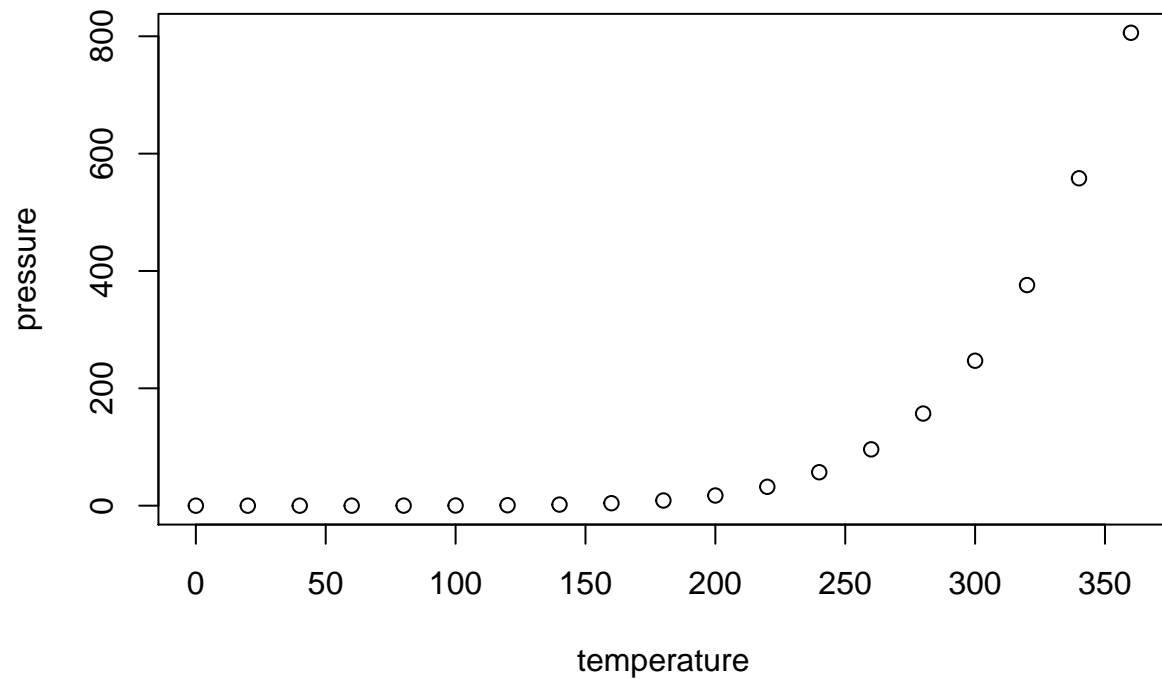

Note that the `echo = FALSE` parameter was added to the code chunk to prevent printing of the R code that generated the plot.