



V6-HIER64-K20-W20 frozen-cache mechanism replay

Pair deeper than triple (%)


A Sample ancestor depth order

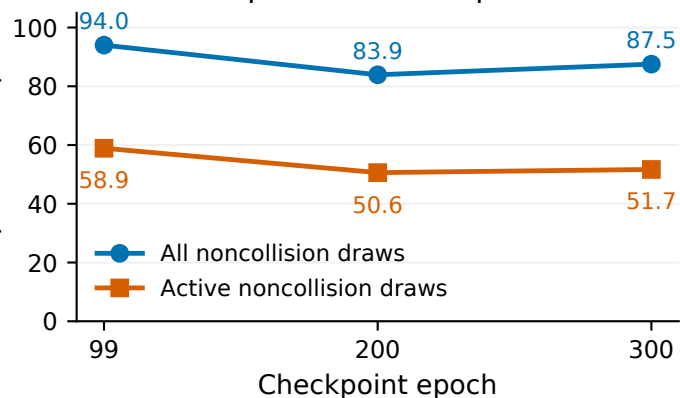

B Proxy pair equals an endpoint

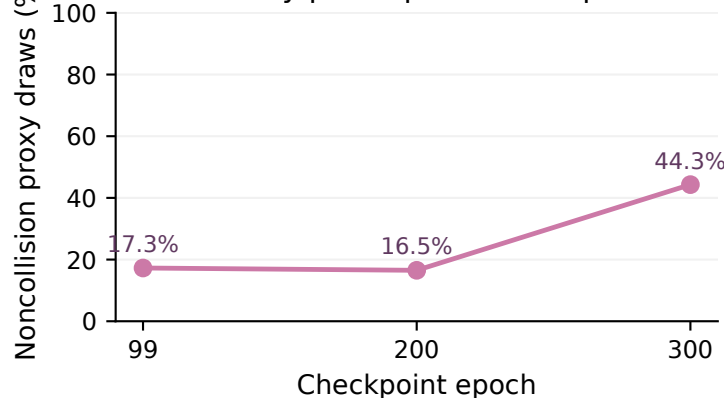

C Dresser radial μ partial

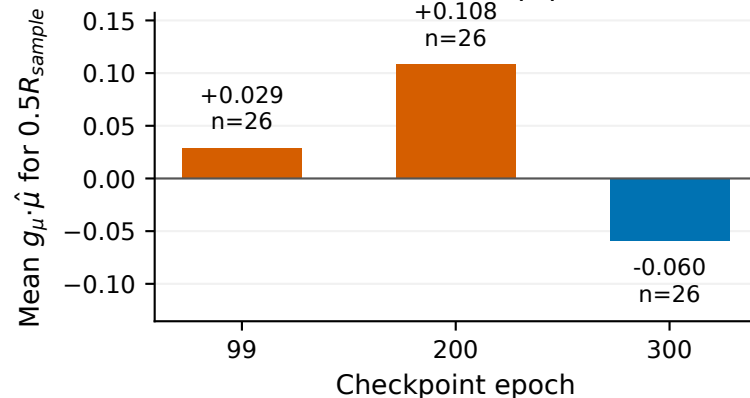

Original mining; 16 matched balanced64 batches per checkpoint; one-seed FP32 CPU replay of clean eval embeddings.

Counts pool source draws; active draws exclude collisions and have nonzero hinge loss. Dresser n counts sampled positions, with repeats possible.

Negative radial partial implies an outward $-\nabla_\mu$ step; this is not a backbone or optimizer update. No morphology truth is used.