


# Bringing Objects to Life: Supporting Program Comprehension through Animated 2.5D Maps of Program Traces

Christoph Thiede

christoph.thiede@student.hpi.de

Hasso Plattner Institute

University of Potsdam, Germany

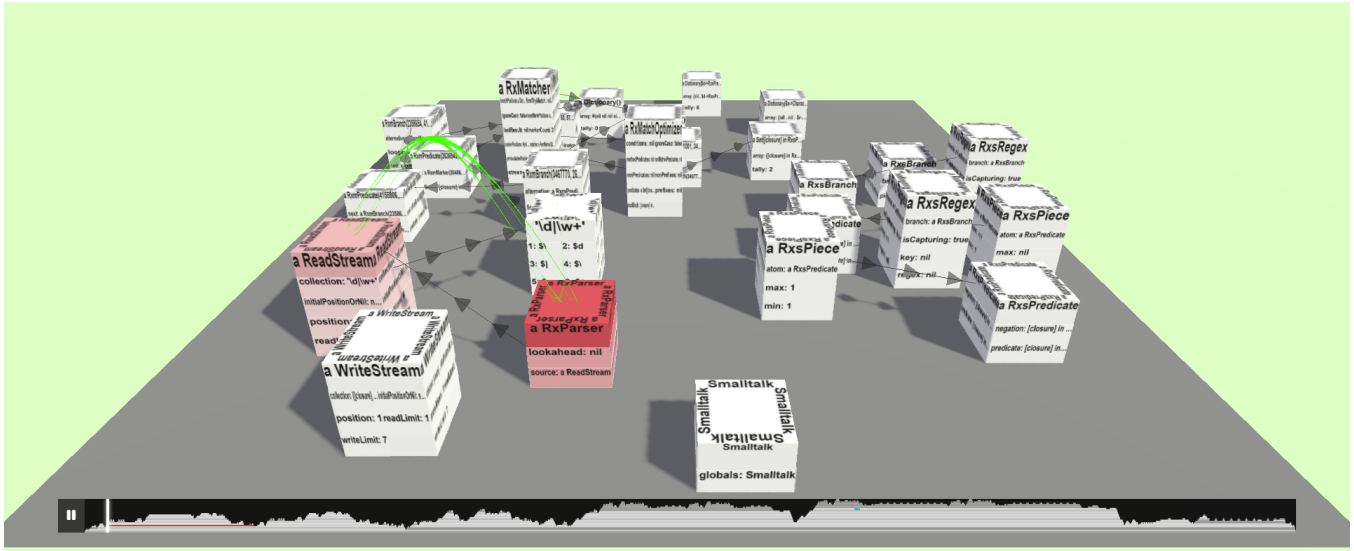

**Figure 1: TODO**

## ABSTRACT

Program comprehension is a key activity in software development. Several visualization approaches such as software maps have been proposed to support programmers in exploring the architecture of software systems, while little attention has been paid to the exploration of program behavior and programmers still rely on traditional code browsing and debugging tools. We propose a novel approach for visualizing program behavior through animated 2.5D maps depicting particular objects and their interactions from a program trace. We describe our implementation of this approach and evaluate it for different program traces through an experience report and performance measurements. Our results indicate that our approach can be beneficial for program comprehension tasks, but that further research is needed to improve scalability and usability.

## CCS CONCEPTS

- **Human-centered computing** → Visualization techniques;
- **Software and its engineering** → Software maintenance tools.

## KEYWORDS

software visualization, software maps, object-oriented programming, program comprehension, omniscient debugging

## 1 INTRODUCTION

Exploring and understanding software systems play a central role in software development. Programmers frequently get thrown into unknown systems that they want to fix, change, or extend. For this, they need to build up a mental model that connects the system's visible behavior to its high-level architecture and low-level implementation artifacts.

Traditionally, programmers explore software systems by reading their source code. An alternative approach is to explore the system’s behavior by example: programmers can start by invoking the system with a particular input or by running a test case and then use a debugger to step through the program’s execution, identify relevant units and actors, and explore their interactions. As traditional debuggers are constrained to the temporal execution order of the program, *omniscient debuggers* (also referred to as *time-travel debuggers* or *back-in-time debuggers*) exist that record a *program trace* and allow programmers to explore the program’s behavior in a non-linear fashion [32, 23, 44, 36, 52]. However, omniscient debuggers are not well suited for exploring large program traces involving several subsystems and dozens of interacting objects: while their fine-grained display of source code and variables is useful for debugging-related activities, it impedes the exploration of the system’s high-level architecture and behavior.

On the other hand, several visualization approaches have been proposed to support programmers in exploring the architecture of

software systems. In particular, *software maps* that display the static structure of systems using several metaphors such as cities or forests were found to be useful for program comprehension tasks [57, 2, 38]. Yet, most approaches neglect the dynamic behavior of systems and take a coarse-grained view of their structure, which makes them unsuitable for developing a mental model of the system’s behavior that situates particular interacting objects and connects them to the overall functioning of the system.

To bridge this gap between coarse-grained static software maps and fine-grained omniscient debugging views, we propose a novel approach for visualizing the behavior of object-oriented software systems through animated 2.5D maps depicting particular objects and their interactions from a program trace. In particular, we make the following contributions:

- (1) We present a novel visualization approach for object-oriented program behavior through animated 2.5D maps.
- (2) We describe the implementation of our prototype TRACE4D that applies this approach using program traces from a Squeak/Smalltalk environment and the THREE.js 3D library.
- (3) We discuss the potential and limitations of our approach by reporting on our experience with it and by evaluating the performance of our implementation for different program traces.

We make all artifacts of this work available at a public repository<sup>1</sup>.

The remainder of this paper is structured as follows: in [section 2](#), we discuss related work on software maps, object-oriented programs, and program traces. In [section 3](#), we present our visualization approach for program traces. In [section 4](#), we describe our implementation of this approach. In [section 5](#), we discuss our approach through an experience report and a performance evaluation. Finally, we conclude and discuss future work in [section 6](#).

## 2 RELATED WORK

Several approaches for visualizing the architecture and behavior of software systems have been proposed in the past. In the broad field of program visualization [42, 49, 51], *algorithm animation* is an early approach that mainly focuses on visualizing procedural algorithms and data structures in educational contexts [8]. During the last decades, more approaches have been proposed that allow to create general-purpose visualizations for the architecture and behavior of arbitrary software systems [47, 10, 11, 16].

### 2.1 Software Architecture Visualization

The term *software maps* describes a family of approaches that use metaphors from cartography to visualize the architecture of software systems.

*Treemaps.* *Treemaps* display the static structure of software systems by visualizing their hierarchical organization of packages and classes, folders and files, autc. as a nested set of shapes [37, 38]. They offer different visual variables such as the size, color, and position of the shapes to encode additional information about the system’s size or evolution. Shapes are usually rectangles but can

also be polygons as in Voronoi tessellation treemaps [6]. A popular modern type of treemaps is *2.5D treemaps* that add a third dimension to the visualization by transforming each shape into a right prisma (usually cuboid) of a variable height. Many approaches use the *software city* metaphor to style the cuboids of a 2.5D treemap as buildings of a city [17, 57, 1, 40, 24, 38].

*Topic maps.* Unless treemaps, *topic maps* do not display the programmer-specified organization of a software system but use natural language processing techniques such as source code topic models, latent dirichlet allocation, and multidimensional scaling to arrange units of the software in a 2D or 3D graph [4]. Different metaphors have been proposed to embody these graphs in a map, including boardgames [3] and landscapes such as forests [2] and galaxies [5].

*Animated software maps.* Next to using static visual variables, some approaches enrich software maps with animations to display dynamic information over time [31, sec. 3.4]. Dynamic information can refer to the behavior or evolution of software: for instance, EvoSPACES [17] highlights classes in a software city when they are activated, while DYNACITY [14], EXPLORVIZ [27], SYNCHROVIS [56], and others [12] also draw connections between modules to visualize dataflow between them; [30] gradually constructs a software city and updates the geometries and colors of buildings to represent development activity, and GOURCE [9] enhances the construction animation of a file tree with moving avatars representing code authors. Some approaches allow programmers to monitor a system in real-time [19] while others replay a previously recorded trace of software activity [17].

### 2.2 Entity-Centric Behavior Visualization

To provide visual insights into the behavior of software, a natural choice is to attribute behavior to different entities of the software. Entities can be organizational units such as modules or classes but also individual object instances of object-oriented programs.

*Object graphs.* Several tools allow programmers to explore relevant portions of a program’s object graph [39, 20]. Some graphs resemble the look of UML object diagrams and provide details about objects’s internal state while others choose more compact representations. To reduce the visual complexity of graph displays, some tools provide programmers with means for filtering objects based on their organization or relation to program slices [29, 22].

*Communication flow.* *Call graphs* and *control-flow graphs* are two popular ways for displaying entities with their mutual dynamic interactions or communications [15, 29, 31, 46, 54, 7, 45]. Entities can be nodes from an object graph or organizational units such as classes or modules. AVID and PATHOBJECTS [48] provide animated object graphs where users can explore the control flow interactively. [7] merges the stack frames from a control-flow graph and the nodes from an object graph into a single *memeograph* that can be explored through animation.

In contrast to traditional call graphs, some works have proposed peripheral, hierarchical layouts of nodes such as EXTRAVIS’ *circular bundle views* [13] or [41]’s 3D hyperbolic layout that provide better scaling for highly connected graphs. Another representation of

<sup>1</sup><https://github.com/LinqLover/trace4d>

inter-entity communication is to provide full adjacency matrices of the call graph [43].

**Dataflow.** Another perspective that can be taken on the object graph is how state is transferred through the system. The WHYLINE approach allows programmers to ask questions about why certain behaviors did or did not happen or where certain values came from and presents the answers in a sliced control-flow graph [26]. [33] proposes an *inter-unit flow view* that displays the amount of data or objects exchanged between different classes or modules in a directed weighted graph; this graph can also be embedded into a traditional call graph [34].

**State changes.** [34] also proposes a *side-effects graph* [18] (also referred to as *test blueprints* [35]) that displays connections between objects changing each other's state. Similarly, *object traces* describe a way to slice a call graph for exploring the state evolution of single objects [52, 53].

### 2.3 Time-Centric Behavior Visualization

Next to the communication between entities, another perspective that visualizations commonly take on software behavior is the temporal order of program execution.

**Call trees.** A call tree is a hierarchy of stack frames or message sends that can be gained from a program trace. Besides naive graph representations of this data structure, several approaches display call trees using hierarchical layouts such as treemaps, sunbursts, or *icicle plots* [28, 55, 58]. Similarly to icicle plots, *flame graphs* show the historical call stack over time, but they also assign colors to stack frames for displaying additional performance data from profiling tools [21].

**Sequential displays.** UML sequence diagrams are a traditional approach for displaying communication between objects over time. Several tools adopt [50] and extend this diagram type [22]: for instance, ISVis' *information mural* [25] and EXTRAVIS' *massive sequence view* [13] derive miniaturized versions of a sequence diagram [31, sec. 3.4], and OVATION [15] detects execution patterns to reduce sequence diagrams [22].

## 3 VISUALIZATION APPROACH

## 4 IMPLEMENTATION

## 5 DISCUSSION

## 6 CONCLUSION

## REFERENCES

- [1] Susanna Ardigò, Csaba Nagy, Roberto Minelli, and Michele Lanza. 2021. Visualizing data in software cities. In *2021 Working Conference on Software Visualization (VISOFT)*, 145–149. doi: [10.1109/VISOFT52517.2021.00028](https://doi.org/10.1109/VISOFT52517.2021.00028).
- [2] Daniel Atzberger, Tim Cech, Merlin Haye, Maximilian Söchtting, Willy Scheibel, Daniel Limberger, and Jürgen Döllner. 2021. Software forest: a visualization of semantic similarities in source code using a tree metaphor. In (Feb. 2021), 112–122. doi: [10.5220/0010267601120122](https://doi.org/10.5220/0010267601120122).
- [3] Daniel Atzberger, Tim Cech, Adrian Jobst, Willy Scheibel, Daniel Limberger, Matthias Trapp, and Jürgen Döllner. 2022. Visualization of knowledge distribution across development teams using 2.5 d semantic software maps. In *VISGRAPP (3: IVAPP)*, 210–217.
- [4] Daniel Atzberger, Tim Cech, Willy Scheibel, Daniel Limberger, and Jürgen Döllner. 2023. Visualization of source code similarity using 2.5 d semantic software maps. In *Computer Vision, Imaging and Computer Graphics Theory and Applications: 16th International Joint Conference, VISGRAPP 2021, Virtual Event, February 8–10, 2021, Revised Selected Papers*. Springer, 162–182.
- [5] Daniel Atzberger, Willy Scheibel, Daniel Limberger, and Jürgen Döllner. 2021. Software galaxies: displaying coding activities using a galaxy metaphor. In *Proceedings of the 14th International Symposium on Visual Information Communication and Interaction (VINCI '21)* Article 18. Association for Computing Machinery, Potsdam, Germany, 2 pages. ISBN: 9781450386470. doi: [10.1145/3481549.3481573](https://doi.org/10.1145/3481549.3481573).
- [6] Michael Balzer, Oliver Deussen, and Claus Lewerentz. 2005. Voronoi treemaps for the visualization of software metrics. In *Proceedings of the 2005 ACM Symposium on Software Visualization (SoftVis '05)*. Association for Computing Machinery, St. Louis, Missouri, 165–172. ISBN: 1595930736. doi: [10.1145/1056018.1056041](https://doi.org/10.1145/1056018.1056041).
- [7] Peter Boothe and Sandro Badame. 2011. Animation of object-oriented program execution. In *Proceedings of Bridges 2011: Mathematics, Music, Art, Architecture, Culture*. Reza Sarhangi and Carlo H. Séquin, (Eds.) Tesselations Publishing, Phoenix, Arizona, 585–588. ISBN: 978-0-9846042-6-5. <http://archive.bridgesmathart.org/2011/bridges2011-585.html>.
- [8] Marc H Brown and Robert Sedgewick. 1984. A system for algorithm animation. In *Proceedings of the 11th annual conference on Computer graphics and interactive techniques*, 177–186.
- [9] Andrew H. Caudwell. 2010. Gource: visualizing software version control history. In *Proceedings of the ACM International Conference Companion on Object Oriented Programming Systems Languages and Applications Companion (OOPSLA '10)*. Association for Computing Machinery, Reno/Tahoe, Nevada, USA, 73–74. ISBN: 9781450302401. doi: [10.1145/1869542.1869554](https://doi.org/10.1145/1869542.1869554).
- [10] Yung-Pin Cheng, Jih-Feng Chen, Ming-Chieh Chiu, Nien-Wei Lai, and Chien-Chih Tseng. 2008. Xdiva: a debugging visualization system with composable visualization metaphors. In *Companion to the 23rd ACM SIGPLAN Conference on Object-Oriented Programming Systems Languages and Applications (OOPSLA Companion '08)*. Association for Computing Machinery, Nashville, TN, USA, 807–810. ISBN: 9781605582207. doi: [10.1145/1449814.1449869](https://doi.org/10.1145/1449814.1449869).
- [11] Andrei Chis, Tudor Girba, and Oscar Nierstrasz. 2014. The moldable debugger: a framework for developing domain-specific debuggers. In *Software Language Engineering*. Benoît Combemale, David J. Pearce, Olivier Barais, and Jürgen J. Vinju, (Eds.) Springer International Publishing, Cham, 102–121. ISBN: 978-3-319-11245-. doi: [10.1007/978-3-319-11245-9\\_6](https://doi.org/10.1007/978-3-319-11245-9_6).
- [12] Marcus Ciolkowski, Simon Faber, and Sebastian von Mammen. 2017. 3-d visualization of dynamic runtime structures. In *Proceedings of the 27th International Workshop on Software Measurement and 12th International Conference on Software Process and Product Measurement (IWSM Mensura '17)*. Association for Computing Machinery, Gothenburg, Sweden, 189–198. ISBN: 9781450348539. doi: [10.1145/3143434.3143435](https://doi.org/10.1145/3143434.3143435).
- [13] Bas Cornelissen, Andy Zaidman, Arie van Deursen, and Bart van Rompaey. 2009. Trace visualization for program comprehension: a controlled experiment. In *2009 IEEE 17th International Conference on Program Comprehension*, 100–109. doi: [10.1109/ICPC.2009.5090033](https://doi.org/10.1109/ICPC.2009.5090033).
- [14] Veronika Dashuber and Michael Philippsen. 2022. Trace visualization within the software city metaphor: controlled experiments on program comprehension. *Information and Software Technology*, 150, 106989. doi: <https://doi.org/10.1016/j.infsof.2022.106989>.
- [15] Wim De Pauw, David Lorenz, John Vlissides, and Mark Wegman. 1998. Execution patterns in object-oriented visualization. In *Proceedings of the 4th Conference on USENIX Conference on Object-Oriented Technologies and Systems - Volume 4 (COOTS'98)*. USENIX Association, Santa Fe, New Mexico, 16. doi: [10.5555/1268009.1268025](https://doi.org/10.5555/1268009.1268025).
- [16] Sabin Devkota, Matthew P LeGendre, Adam Kunen, Pascal Aschwanden, and Katherine E Isaacs. 2022. Domain-centered support for layout, tasks, and specification for control flow graph visualization. In *2022 Working Conference on Software Visualization (VISOFT)*. IEEE, 40–50.
- [17] Philippe Dugerdil and Sazzadul Alam. 2008. Execution trace visualization in a 3d space. In *Fifth International Conference on Information Technology: New Generations (itng 2008)*. IEEE, 38–43.
- [18] Julien Fierz. 2009. *Compass: Flow-Centric Back-In-Time Debugging*. Master's thesis. University of Bern. <https://scg.unibe.ch/archive/masters/Fier09a.pdf>.
- [19] Florian Fittkau, Jan Waller, Christian Wulf, and Wilhelm Hasselbring. 2013. Live trace visualization for comprehending large software landscapes: the explorviz approach. In *2013 First IEEE Working Conference on Software Visualization (VISOFT)*, 1–4. doi: [10.1109/VISOFT.2013.6650536](https://doi.org/10.1109/VISOFT.2013.6650536).
- [20] Paul Gestwicki and Bharat Jayaraman. 2005. Methodology and architecture of jive. In *Proceedings of the 2005 ACM Symposium on Software Visualization (SoftVis '05)*. Association for Computing Machinery, St. Louis, Missouri, 95–104. ISBN: 1595930736. doi: [10.1145/1056018.1056032](https://doi.org/10.1145/1056018.1056032).
- [21] Brendan Gregg. 2016. The flame graph. *Commun. ACM*, 59, 6, (May 2016), 48–57. doi: [10.1145/2909476](https://doi.org/10.1145/2909476).



- [22] Abdelwahab Hamou-Lhadj and Timothy C. Lethbridge. 2004. A survey of trace exploration tools and techniques. In *Proceedings of the 2004 Conference of the Centre for Advanced Studies on Collaborative Research (CASCON '04)*. IBM Press, Markham, Ontario, Canada, 42–55. doi: [10.5555/1034914.1034918](https://doi.org/10.5555/1034914.1034918).
- [23] Christoph Hofer, Marcus Denker, and Stéphane Ducasse. 2006. Design and implementation of a backward-in-time debugger. In *NODE 2006 – GSEM 2006*. Robert Hirschfeld, Andreas Polze, and Ryszard Kowalczyk, (Eds.) Gesellschaft für Informatik e.V., Bonn, 17–32. doi: [20.500.12116/24100](https://doi.org/10.500.12116/24100).
- [24] Adrian Hoff, Lea Gerling, and Christoph Seidl. 2022. Utilizing software architecture recovery to explore large-scale software systems in virtual reality. English. In *2022 Working Conference on Software Visualization (VISOFT)*. IEEE, United States, (Oct. 2022). ISBN: 978-1-6654-8093-2. doi: [10.1109/VISOFT55257.2022.00020](https://doi.org/10.1109/VISOFT55257.2022.00020).
- [25] D.F. Jerding and J.T. Stasko. 1998. The information mural: a technique for displaying and navigating large information spaces. *IEEE Transactions on Visualization and Computer Graphics*, 4, 3, 257–271. doi: [10.1109/2945.722299](https://doi.org/10.1109/2945.722299).
- [26] Amy J. Ko and Brad A. Myers. 2008. Debugging reinvented: asking and answering why and why not questions about program behavior. In *Proceedings of the 30th International Conference on Software Engineering (ICSE '08)*. Association for Computing Machinery, Leipzig, Germany, 301–310. ISBN: 9781605580791. doi: [10.1145/1368088.1368130](https://doi.org/10.1145/1368088.1368130).
- [27] Alexander Krause, Malte Hansen, and Wilhelm Hasselbring. 2021. Live visualization of dynamic software cities with heat map overlays. In *2021 Working Conference on Software Visualization (VISOFT)*, 125–129. doi: [10.1109/VISOFT52517.2021.00024](https://doi.org/10.1109/VISOFT52517.2021.00024).
- [28] J. B. Kruskal and J. M. Landwehr. 1983. Icicle plots: better displays for hierarchical clustering. *The American Statistician*, 37, 2, 162–168. eprint: <https://www.tandfonline.com/doi/pdf/10.1080/00031305.1983.10482733>. doi: [10.1080/00031305.1983.10482733](https://doi.org/10.1080/00031305.1983.10482733).
- [29] Danny B. Lange and Yuichi Nakamura. 1997. Object-oriented program tracing and visualization. *Computer*, 30, 5, (May 1997), 63–70. doi: [10.1109/2.589912](https://doi.org/10.1109/2.589912).
- [30] Guillaume Langelier, Houari Sahraoui, and Pierre Poulin. 2008. Exploring the evolution of software quality with animated visualization. In *2008 IEEE Symposium on Visual Languages and Human-Centric Computing*, 13–20. doi: [10.1109/VLHCC.2008.4639052](https://doi.org/10.1109/VLHCC.2008.4639052).
- [31] François Lemieux and Martin Salois. 2006. Visualization techniques for program comprehension literature review. In *Proceedings of the 2006 Conference on New Trends in Software Methodologies, Tools and Techniques: Proceedings of the Fifth SoMet\_06*. IOS Press, NLD, 22–47. ISBN: 1586036734. doi: [10.5555/1565321.1565325](https://doi.org/10.5555/1565321.1565325).
- [32] Bil Lewis. 2003. Debugging backwards in time. In *Proceedings of the Fifth International Workshop on Automated Debugging (ADEBUG 2003)*. Vol. cs.SE/0310016, 11 pages. doi: [10.48550/ARXIV.CS/0310016](https://doi.org/10.48550/ARXIV.CS/0310016).
- [33] Adrian Lienhard, Stéphane Ducasse, and Tudor Girba. 2009. Taking an object-centric view on dynamic information with object flow analysis. In *ESUG 2007 International Conference on Dynamic Languages (ESUG/ICDL 2007) number 1*. Vol. 35, 63–79. doi: <https://doi.org/10.1016/j.cl.2008.05.006>.
- [34] Adrian Lienhard, Julien Fierz, and Oscar Nierstrasz. 2009. Flow-centric, back-in-time debugging. In *Objects, Components, Models and Patterns: 47th International Conference, TOOLS EUROPE 2009, Zurich, Switzerland, June 29-July 3, 2009. Proceedings 47*. Springer, 272–288.
- [35] Adrian Lienhard, Tudor Girba, Orla Greevy, and Oscar Nierstrasz. 2008. Test blueprints - exposing side effects in execution traces to support writing unit tests. In *2008 12th European Conference on Software Maintenance and Reengineering*, 83–92. doi: [10.1109/CSMR.2008.4493303](https://doi.org/10.1109/CSMR.2008.4493303).
- [36] Adrian Lienhard, Tudor Girba, and Oscar Nierstrasz. 2008. Practical object-oriented back-in-time debugging. In *22nd European Conference on Object-oriented Programming (ECOOP 2008) (Lecture Notes in Computer Science)*. Vol. 5142. Springer Verlag, Paphos, Cyprus, (July 2008), 592–615. ISBN: 978-3-540-70591-8. doi: [10.1007/978-3-540-70592-5\\_25](https://doi.org/10.1007/978-3-540-70592-5_25).
- [37] Daniel Limberger, Willy Scheibel, Jürgen Döllner, and Matthias Trapp. 2019. Advanced visual metaphors and techniques for software maps. In *Proceedings of the 12th International Symposium on Visual Information Communication and Interaction (VINCI '19) Article 11*. Association for Computing Machinery, Shanghai, China, 8 pages. ISBN: 9781450376266. doi: [10.1145/3356422.3356444](https://doi.org/10.1145/3356422.3356444).
- [38] Daniel Limberger, Willy Scheibel, Jürgen Döllner, and Matthias Trapp. 2022. Visual variables and configuration of software maps. *J. Vis.*, 26, 1, (Sept. 2022), 249–274. doi: [10.1007/s12650-022-00868-1](https://doi.org/10.1007/s12650-022-00868-1).
- [39] Andrés Moreno, Niko Myller, Erkki Sutinen, and Mordechai Ben-Ari. 2004. Visualizing programs with jeliot 3. In *Proceedings of the Working Conference on Advanced Visual Interfaces (AVI '04)*. Association for Computing Machinery, Gallipoli, Italy, 373–376. ISBN: 1581138679. doi: [10.1145/989863.989928](https://doi.org/10.1145/989863.989928).
- [40] Johann Mortara, Philippe Collet, and Anne-Marie Dery-Pinna. 2021. Visualization of object-oriented variability implementations as cities. In *2021 Working Conference on Software Visualization (VISOFT)*. IEEE, 76–87.
- [41] T. Munzner. 1997. H3: laying out large directed graphs in 3d hyperbolic space. In *Proceedings of the 1997 IEEE Symposium on Information Visualization (InfoVis '97) (INFOVIS '97)*. IEEE Computer Society, USA, 2. ISBN: 0818681896.
- [42] B. A. Myers. 1986. Visual programming, programming by example, and program visualization: a taxonomy. In *Proceedings of the SIGCHI Conference on Human Factors in Computing Systems (CHI '86)*. Association for Computing Machinery, Boston, Massachusetts, USA, 59–66. ISBN: 0897911806. doi: [10.1145/22627.22349](https://doi.org/10.1145/22627.22349).
- [43] Wim De Pauw, Doug Kimelman, and John M. Vlissides. 1994. Modeling object-oriented program execution. In *Proceedings of the 8th European Conference on Object-Oriented Programming (ECOOP '94)*. Springer-Verlag, Berlin, Heidelberg, 163–182. ISBN: 3540582029. doi: [10.5555/646152.679378](https://doi.org/10.5555/646152.679378).
- [44] Guillaume Pothier and Éric Tanter. 2009. Back to the future: omniscient debugging. *IEEE Software*, 26, 6, 78–85. doi: [10.1109/MS.2009.169](https://doi.org/10.1109/MS.2009.169).
- [45] Luc Prestin. 2022. Hidden modularity. Retrieved May 5, 2023 from <https://github.com/LucPrestin/Hidden-Modularity>.
- [46] Steven P. Reiss. 2007. Visual representations of executing programs. *Journal of Visual Languages & Computing*, 18, 2, 126–148. Selected papers from Visual Languages and Computing 2005 (VLC '05). doi: <https://doi.org/10.1016/j.jvlc.2007.01.003>.
- [47] Steven P. Reiss. 2006. Visualizing program execution using user abstractions. In *Proceedings of the 2006 ACM Symposium on Software Visualization (SoftVis '06)*. Association for Computing Machinery, Brighton, United Kingdom, 125–134. ISBN: 1595934642. doi: [10.1145/1148493.1148512](https://doi.org/10.1145/1148493.1148512).
- [48] Leon Schweizer. 2014. *PathObjects: Revealing Object Interactions to Assist Developers in Program Comprehension*. Master's thesis. Hasso Plattner Institute, University of Potsdam. <https://github.com/leoschweizer/PathObjects-Thesis>.
- [49] Juha Sorva, Ville Karavirta, and Lauri Malmi. 2013. A review of generic program visualization systems for introductory programming education. *ACM Transactions on Computing Education (TOCE)*, 13, 4, 1–64.
- [50] Tarja Systä, Kai Koskimies, and Hausi Müller. 2001. Shimba—an environment for reverse engineering java software systems. *Software: Practice and Experience*, 31, 4, 371–394. eprint: <https://onlinelibrary.wiley.com/doi/pdf/10.1002/spe.386>. doi: <https://doi.org/10.1002/spe.386>.
- [51] Alfredo R. Teyseyre and Marcelo R. Campo. 2009. An overview of 3d software visualization. *IEEE Transactions on Visualization and Computer Graphics*, 15, 1, 87–105. doi: [10.1109/TVCG.2008.86](https://doi.org/10.1109/TVCG.2008.86).
- [52] Christoph Thiede, Marcel Taeumel, and Robert Hirschfeld. 2023. Object-centric time-travel debugging: exploring traces of objects. In *Companion Proceedings of the 7th International Conference on the Art, Science, and Engineering of Programming (<Programming> '23)*. ACM, Tokyo, Japan, (Mar. 2023), 7 pages. doi: [10.1145/3594671.3594678](https://doi.org/10.1145/3594671.3594678).
- [53] Christoph Thiede, Marcel Taeumel, and Robert Hirschfeld. 2023. Time-awareness in object exploration tools: toward in situ omniscient debugging. In *Proceedings of the 2023 ACM SIGPLAN International Symposium on New Ideas, New Paradigms, and Reflections on Programming and Software (Onward! '23)*. To appear. ACM, Cascais, Portugal, (Oct. 2023), 14 pages. doi: [10.1145/3622758.3622892](https://doi.org/10.1145/3622758.3622892).
- [54] Danny Tramnitzke. 2007. *Object Call Graph Visualization*. Bachelor Thesis. Växjö University. <https://www.diva-portal.org/smash/get/diva2:205514/FULLTEXT01.pdf>.
- [55] Jonas Trümper, Alexandru C Telea, and Jürgen Döllner. 2012. Viewfusion: correlating structure and activity views for execution traces. In *TPCG*. Citeseer, 45–52.
- [56] Jan Waller, Christian Wulf, Florian Fittkau, Philipp Döhring, and Wilhelm Hasselbring. 2013. Synchrovis: 3d visualization of monitoring traces in the city metaphor for analyzing concurrency. In *2013 First IEEE Working Conference on Software Visualization (VISOFT)*, 1–4. doi: [10.1109/VISOFT.2013.6650520](https://doi.org/10.1109/VISOFT.2013.6650520).
- [57] Richard Wettel and Michele Lanza. 2007. Visualizing software systems as cities. In (June 2007), 92–99. doi: [10.1109/VISOFT.2007.4290706](https://doi.org/10.1109/VISOFT.2007.4290706).
- [58] Linda Woodburn, Yalong Yang, and Kim Marriott. 2019. Interactive visualisation of hierarchical quantitative data: an evaluation. In *2019 IEEE Visualization Conference (VIS)*, 96–100. doi: [10.1109/VISUAL.2019.8933545](https://doi.org/10.1109/VISUAL.2019.8933545).