



Back-End Development

Connecting

#12a Loopback & MySQL



Web App Architecture

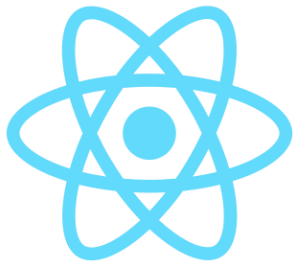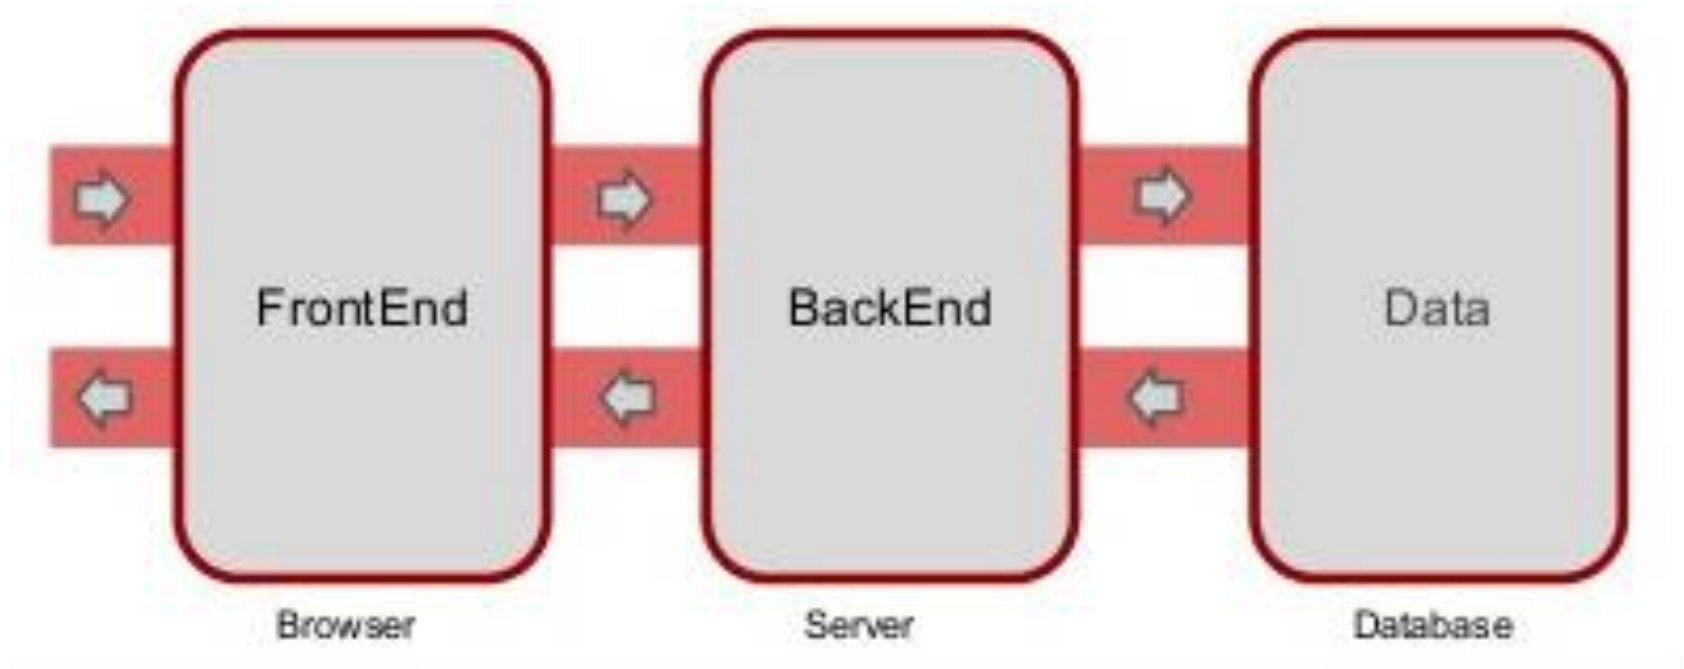

Loopback & MySQL



#1 Activate MySQL Server

Via Command Prompt, go to *mysql.exe* directory
C:\xampp\mysql\bin then execute:

```
$ mysql.exe --user=root --password=12345
```

or

```
$ mysql.exe --user=lintang --password=12345
```

```
C:\Users\lintangwisesa>cd C:\Program Files\MySQL\MySQL Server 5.7\bin
```

```
C:\Program Files\MySQL\MySQL Server 5.7\bin>mysql.exe --user=lintang --password=12345
```

```
mysql: [Warning] Using a password on the command line interface can be insecure.
```

```
Welcome to the MySQL monitor.  Commands end with ; or \g.
```

```
Your MySQL connection id is 2
```

```
Server version: 5.7.21-log MySQL Community Server (GPL)
```

```
Copyright (c) 2000, 2018, Oracle and/or its affiliates. All rights reserved.
```

```
Oracle is a registered trademark of Oracle Corporation and/or its  
affiliates. Other names may be trademarks of their respective  
owners.
```

```
Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.
```

#2 Create Db & Table

■ Create database toko on MySQL

```
$ create database toko;  
$ show databases;
```

■ Create table karyawan on toko db:

```
$ use toko;  
$ create table karyawan(  
    nama varchar(30),  
    usia smallint,  
    id smallint);  
$ show tables;  
$ describe karyawan;
```

#3 Create Loopback App

- Create a Loopback application:

```
$ npm install -g loopback-cli
```

```
$ lb
```

```
$ cd lin_loopback
```

- Comment line *server.enableAuth();* on `/server/boot/authentication.js`

- Activate its server by run `$ node .`

```
Web server listening at:  
http://localhost:3000
```

```
Browse your REST API at  
http://localhost:3000/explorer
```

#4 Set MySQL Connector

■ Install MySQL connector:

```
$ npm install --save loopback-connector-mysql
```

```
$ lb datasource
```

```
? Enter the datasource name: mysql_lin //up to you!
? Select connector for mysql_lin: MySQL (StrongLoop)
? Connection String url to override other settings
mysql://lintang:12345@localhost/toko
? host: localhost
? port: 3306
? user: lintang
? password: 12345
? database: toko
```

#5 Create Loopback Model

■ On directory project, type:
\$ lb model

- [?] Enter the model name: **karyawan //model = table!**
- [?] Select source to attach to: **mysql_lin (mysql)**
- [?] Select model's base class **(PersistedModel)**
- [?] Expose person via the REST API? **Yes**
- [?] Custom plural form (used to build REST URL):
- [?] Common model or server only? **Common**

Let's add some person properties now.

Enter an empty property name when done.

- [?] Property name: **nama**
- [?] Property type: (Use arrow keys) **string**
- [?] Required? (y/N) **y**

#6 Try to POST & GET

- Run `$ node .` then try to POST & GET directly on Loopback explorer (*karyawan model*) or using Postman, then see your MySQL data (*karyawan table*)!

LoopBack API Explorer

Token Not Set

accessToken

```
[
  {
    "nama": "Andi",
    "usia": 25,
    "id": null
  },
  {
    "nama": "Budi",
    "usia": 26,
    "id": null
  },
  {
    "nama": "Caca",
    "usia": 22,
    "id": null
  }
]
```

C:\WINDOWS\system32\cmd.exe - mysql.exe --user=lintang --password=12345

```
mysql> select * from karyawan;
```

nama	usia	id
Andi	25	NULL
Budi	26	NULL
Caca	22	NULL

```
3 rows in set (0.00 sec)
```

```
mysql>
```

Loopback & MySQL Hosting



Free MySQL Hosting

Back-End Development

Connecting

#12a Loopback & MySQL

