Андреев Дмитрий Павлович 431-3

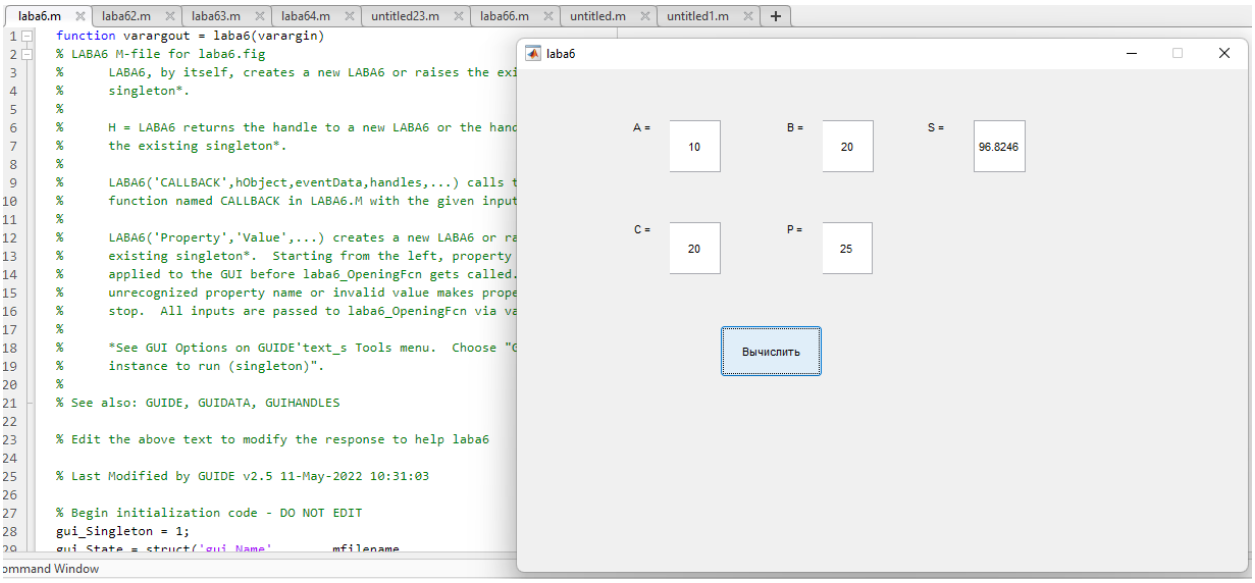


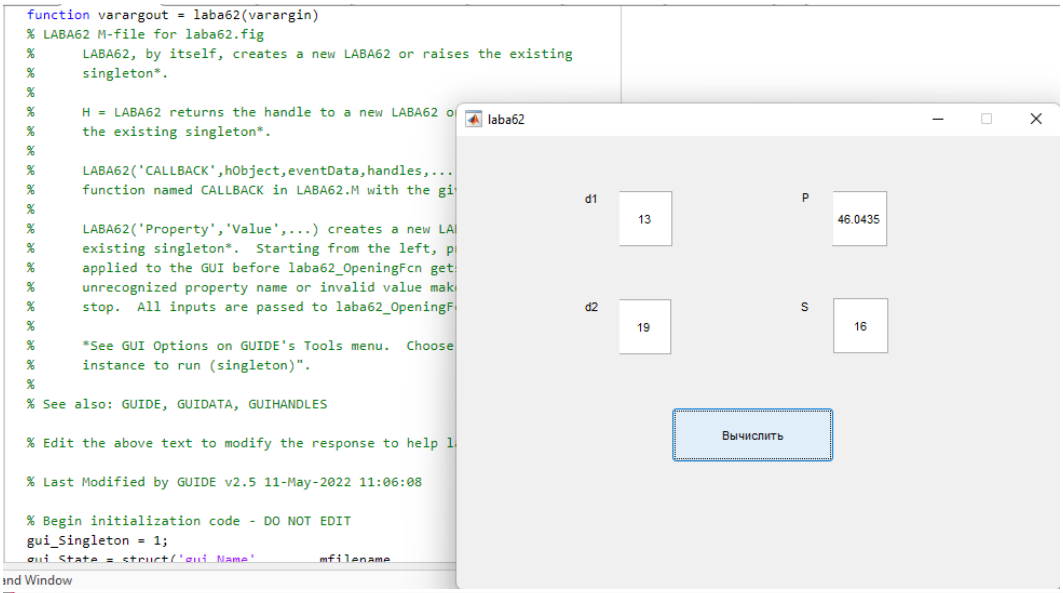


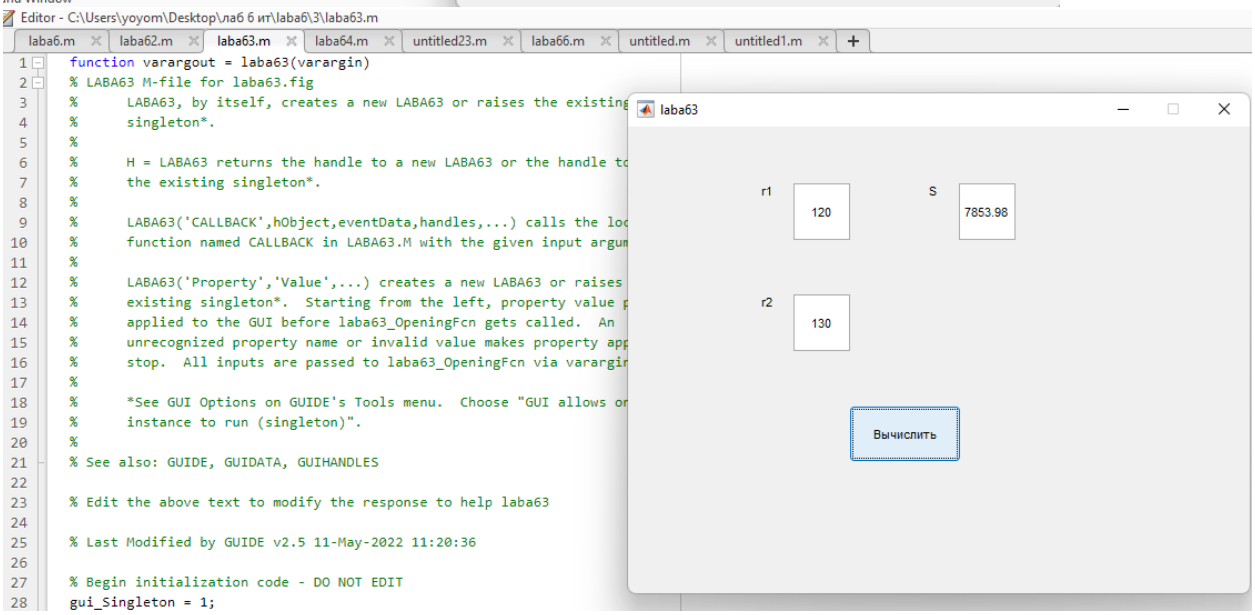

laba6.m | laba62.m | laba63.m | laba64.m | untitled23.m | laba66.m | untitled.m | untitled1.m

```
function varargout = laba64(varargin)
% LABA64 M-file for laba64.fig
%      LABA64, by itself, creates a new LABA64 or raises the existing
%      singleton*.
%
%      H = LABA64 returns the handle to a new LABA64 or the handle to
%      the existing singleton*.
%
%      LABA64('CALLBACK',hObject,eventData,handles,...) calls the local
%      function named CALLBACK in LABA64.M with the given input arguments.
%
%      LABA64('Property','Value',...) creates a new LABA64 or raises the
%      existing singleton*.  Starting from the left, property value pairs a
%      applied to the GUI before laba64_OpeningFcn gets called.  An
%      unrecognized property name or invalid value makes property applicati
%      stop.  All inputs are passed to laba64_OpeningFcn via varargin.
%
%      *See GUI Options on GUIDE's Tools menu.  Choose "GUI allows only one
%      instance to run (singleton)".
%
% See also: GUIDE, GUIDATA, GUIHANDLES

% Edit the above text to modify the response to help laba64

% Last Modified by GUIDE v2.5 11-May-2022 11:31:53

% Begin initialization code - DO NOT EDIT
gui_Singleton = 1;
gui_State = struct('gui_Name',       mfilename
```

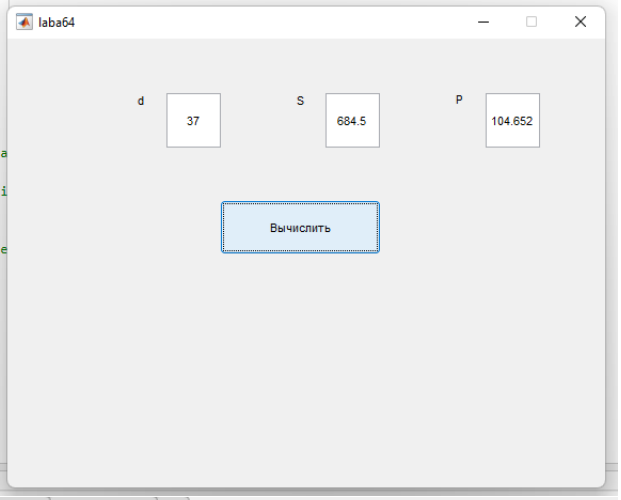


ommand Window

laba6.m | laba62.m | laba63.m | laba64.m | untitled23.m | laba66.m | untitled.m | untitled1.m

```
function varargout = untitled23(varargin)
% UNTITLED23 MATLAB code for untitled23.fig
%      UNTITLED23, by itself, creates a new UNTITLED23 or raises the existing
%      singleton*.
%
%      H = UNTITLED23 returns the handle to a new UNTITLED23 or the handle to
%      the existing singleton*.
%
%      UNTITLED23('CALLBACK',hObject,eventData,handles,...) calls the local
%      function named CALLBACK in UNTITLED23.M with the given input argument
%
%      UNTITLED23('Property','Value',...) creates a new UNTITLED23 or raises
%      existing singleton*.  Starting from the left, property value pairs ar
%      applied to the GUI before untitled23_OpeningFcn gets called.  An
%      unrecognized property name or invalid value makes property applicatio
%      stop.  All inputs are passed to untitled23_OpeningFcn via varargin.
%
%      *See GUI Options on GUIDE's Tools menu.  Choose "GUI allows only one
%      instance to run (singleton)".
%
% See also: GUIDE, GUIDATA, GUIHANDLES

% Edit the above text to modify the response to help untitled23

% Last Modified by GUIDE v2.5 27-May-2022 15:50:28

% Begin initialization code - DO NOT EDIT
gui_Singleton = 1;
gui_State = struct('gui_Name',       mfilename
```

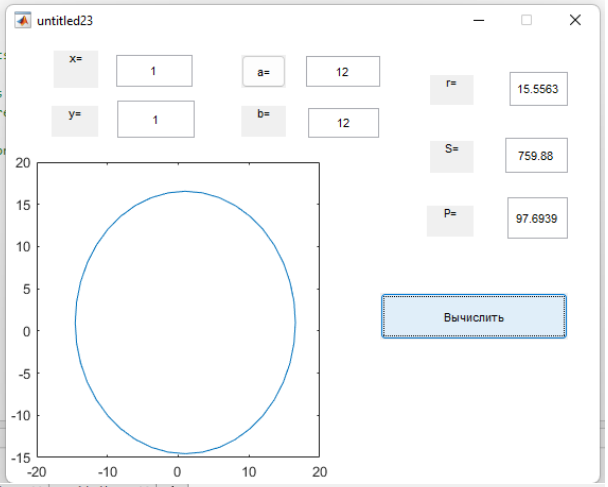


ommand Window

```
>> laba6
```

laba6.m | laba62.m | laba63.m | laba64.m | untitled23.m | laba66.m | untitled.m | untitled1.m

```
function varargout = laba66(varargin)
% LABA66 M-file for laba66.fig
%      LABA66, by itself, creates a new LABA66 or raises the existing
%      singleton*.
%
%      H = LABA66 returns the handle to a new LABA66 or the handle to
%      the existing singleton*.
%
%      LABA66('CALLBACK',hObject,eventData,handles,...) calls the local
%      function named CALLBACK in LABA66.M with the given input arguments.
%
%      LABA66('Property','Value',...) creates a new LABA66 or raises the
%      existing singleton*.  Starting from the left, property value pairs
%      applied to the GUI before laba66_OpeningFcn gets called.  An
%      unrecognized property name or invalid value makes property applicat
%      stop.  All inputs are passed to laba66_OpeningFcn via varargin.
%
%      *See GUI Options on GUIDE's Tools menu.  Choose "GUI allows only o
%      instance to run (singleton)".
%
% See also: GUIDE, GUIDATA, GUIHANDLES

% Edit the above text to modify the response to help laba66

% Last Modified by GUIDE v2.5 11-May-2022 12:03:43

% Begin initialization code - DO NOT EDIT
gui_Singleton = 1;
```

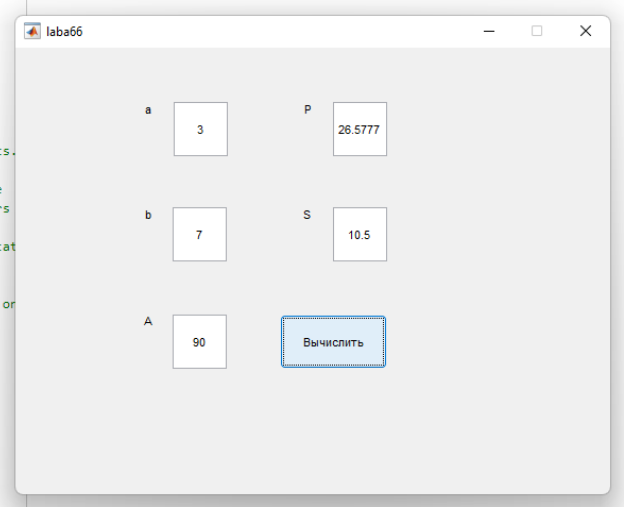

```
function varargout = untitled(varargin)
% UNTITLED M-file for untitled.fig
%      UNTITLED, by itself, creates a new UNTITLED or raises the existi
%      singleton*.
%
%      H = UNTITLED returns the handle to a new UNTITLED or the handle
%      the existing singleton*.
%
%      UNTITLED('CALLBACK',hObject,eventData,handles,...) calls the loc
%      function named CALLBACK in UNTITLED.M with the given input argum
%
%      UNTITLED('Property','Value',...) creates a new UNTITLED or raise
%      existing singleton*.  Starting from the left, property value pai
%      applied to the GUI before untitled_OpeningFcn gets called.  An
%      unrecognized property name or invalid value makes property appli
%      stop.  All inputs are passed to untitled_OpeningFcn via varargin
%
%      *See GUI Options on GUIDE'textp Tools menu.  Choose "GUI allows
%      instance to run (singleton)".
%
% See also: GUIDE, GUIDATA, GUIHANDLES

% Edit the above text to modify the response to help untitled

% Last Modified by GUIDE v2.5 18-May-2022 14:07:34

% Begin initialization code - DO NOT EDIT
gui_Singleton = 1;
```

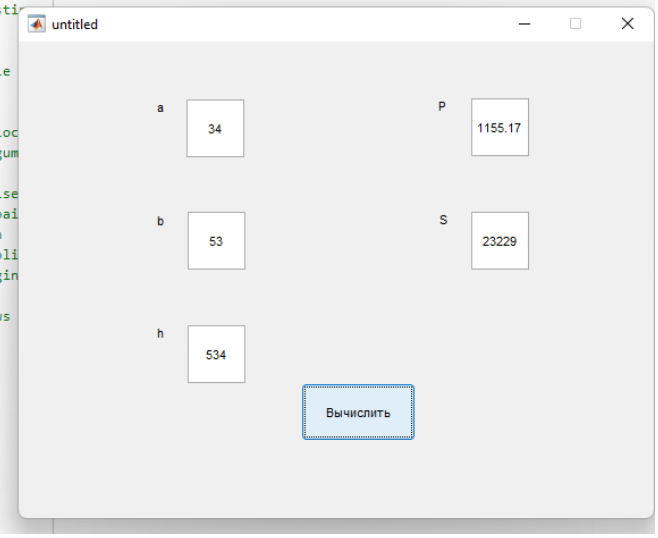


laba6.m | laba62.m | laba63.m | laba64.m | untitled23.m | laba66.m | untitled.m | untitled1.m
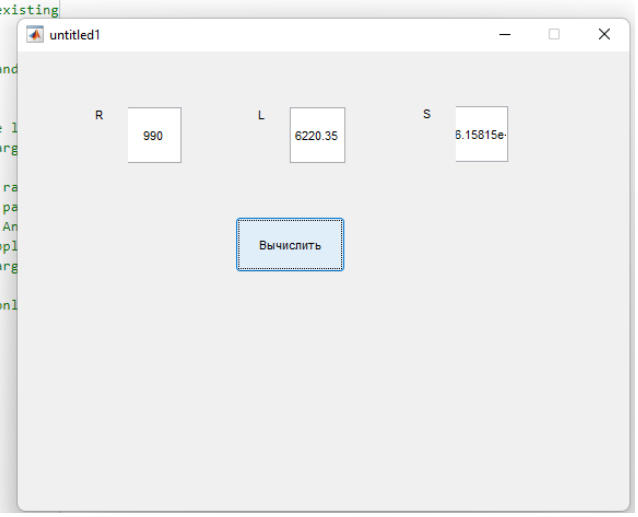
```
function varargout = untitled1(varargin)
% UNTITLED1 M-file for untitled1.fig
%      UNTITLED1, by itself, creates a new UNTITLED1 or raises the existing
%      singleton*.
%
%      H = UNTITLED1 returns the handle to a new UNTITLED1 or the hand
%      the existing singleton*.
%
%      UNTITLED1('CALLBACK',hObject,eventData,handles,...) calls the l
%      function named CALLBACK in UNTITLED1.M with the given input arg
%
%      UNTITLED1('Property','Value',...) creates a new UNTITLED1 or ra
%      existing singleton*.  Starting from the left, property value pa
%      applied to the GUI before untitled1_OpeningFcn gets called.  An
%      unrecognized property name or invalid value makes property appl
%      stop.  All inputs are passed to untitled1_OpeningFcn via varar
%
%      *See GUI Options on GUIDE's Tools menu.  Choose "GUI allows onl
%      instance to run (singleton)".
%
% See also: GUIDE, GUIDATA, GUIHANDLES

% Edit the above text to modify the response to help untitled1

% Last Modified by GUIDE v2.5 18-May-2022 14:12:55

% Begin initialization code - DO NOT EDIT
gui_Singleton = 1;
```