Basic Subnetting Practice

For a /30:

What is the block size: 4 Correct!

How many usable hosts does the subnet have: 2 Correct!


What is the subnet mask for the last octet: 252 Correct!

How many subnets of this size are possible in a class C: 64 Correct!

Write the last netmask octet in binary: 11111100 Correct!

Submit

Show Answers Next

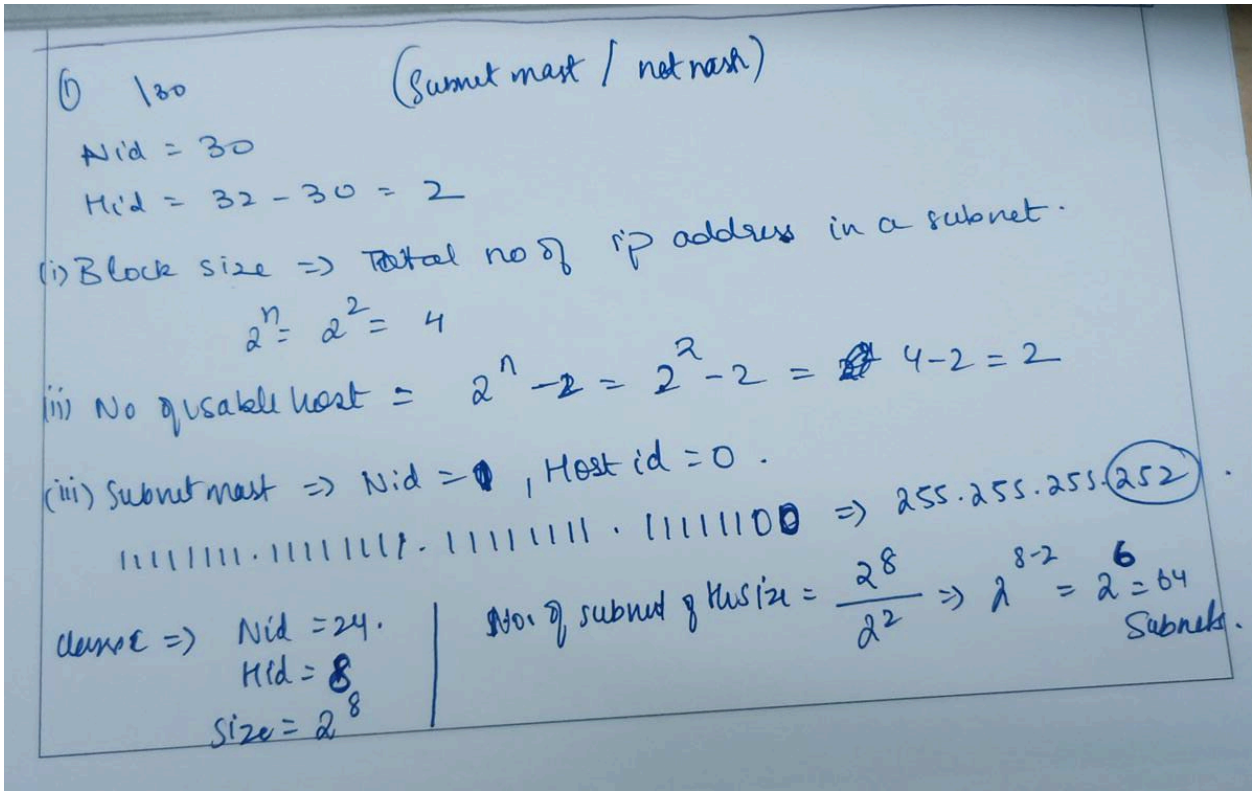

For a /25:

What is the block size: 128 Correct!

How many usable hosts does the subnet have: 126 Correct!


What is the subnet mask for the last octet: 128 Correct!

How many subnets of this size are possible in a class C: 2 Correct!

Write the last netmask octet in binary: 10000000 Correct!

Submit

Show Answers Next

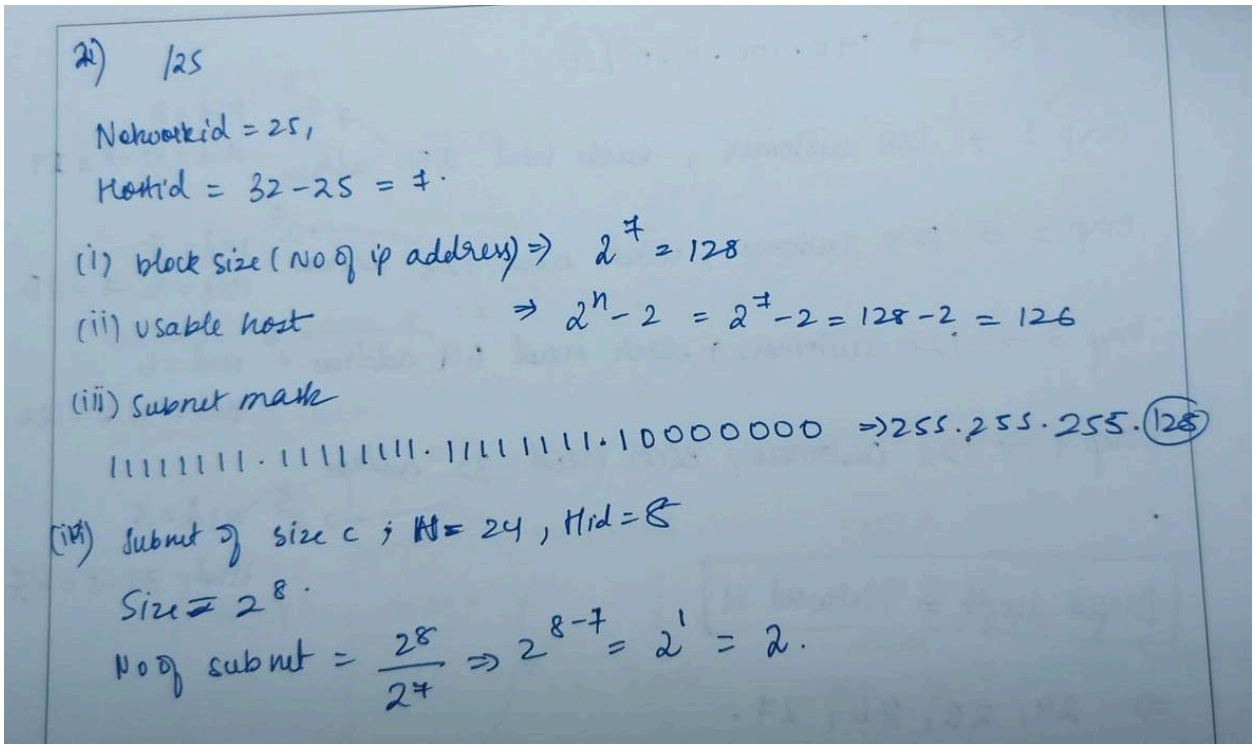

What is the maximum number of valid hosts one will have from the network 192.168.30.0 255.255.255.0

254 Submit


Show Answer Next

☐ I want only this type of question.

Yes! The correct answer is:

254

There are 2^h-2 usable hosts in a network, where h is the number of hot bits.

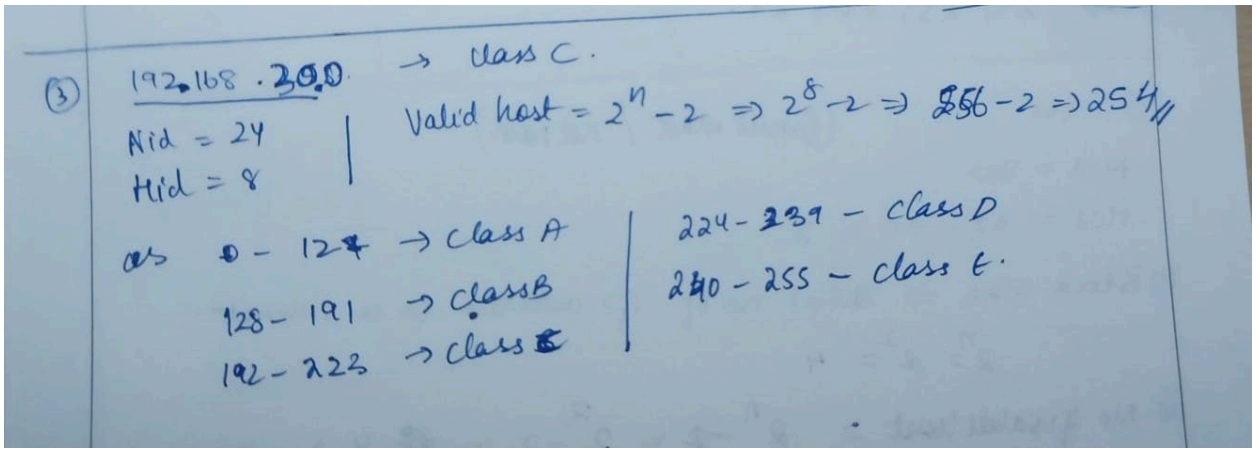

What is the last valid host on the network that 192.168.199.109/25 is a part of?


192.168.199.126 Submit


Show Answer Next

☐ I want only this type of question.

Yes! The correct answer is:

192.168.199.126

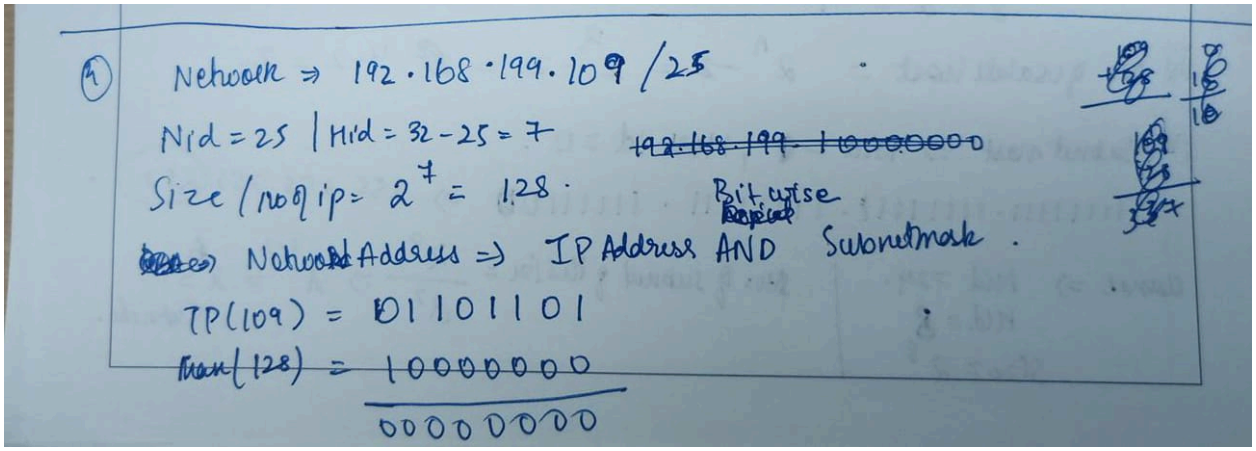

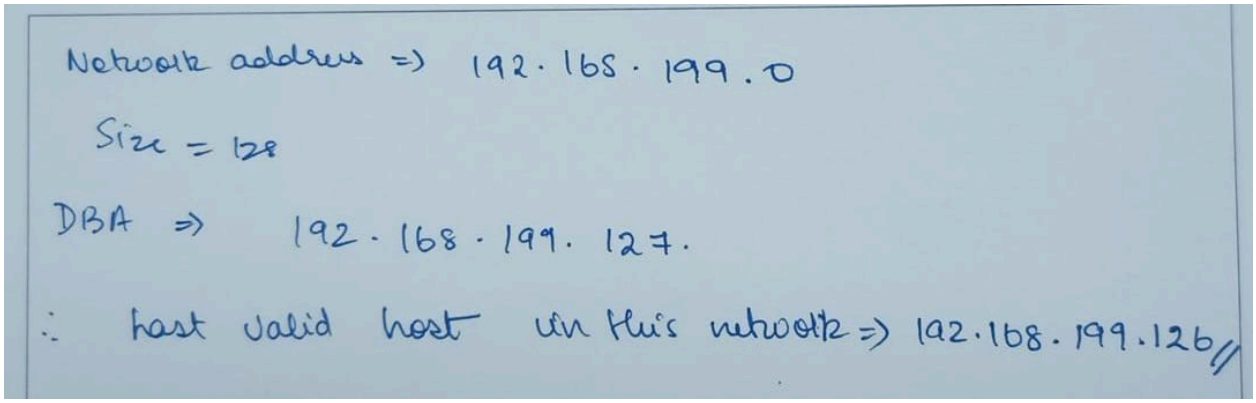


Using the diagram below, which of the following IP addresses would be valid to asign to interface Fa0/3? For your answer type out the IP address.

192.168.0.17


192.168.0.169

192.168.1.4

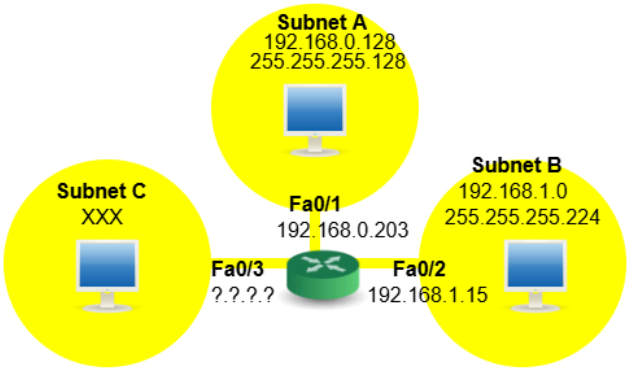

192.168.0.17 Submit

Show Answer Next

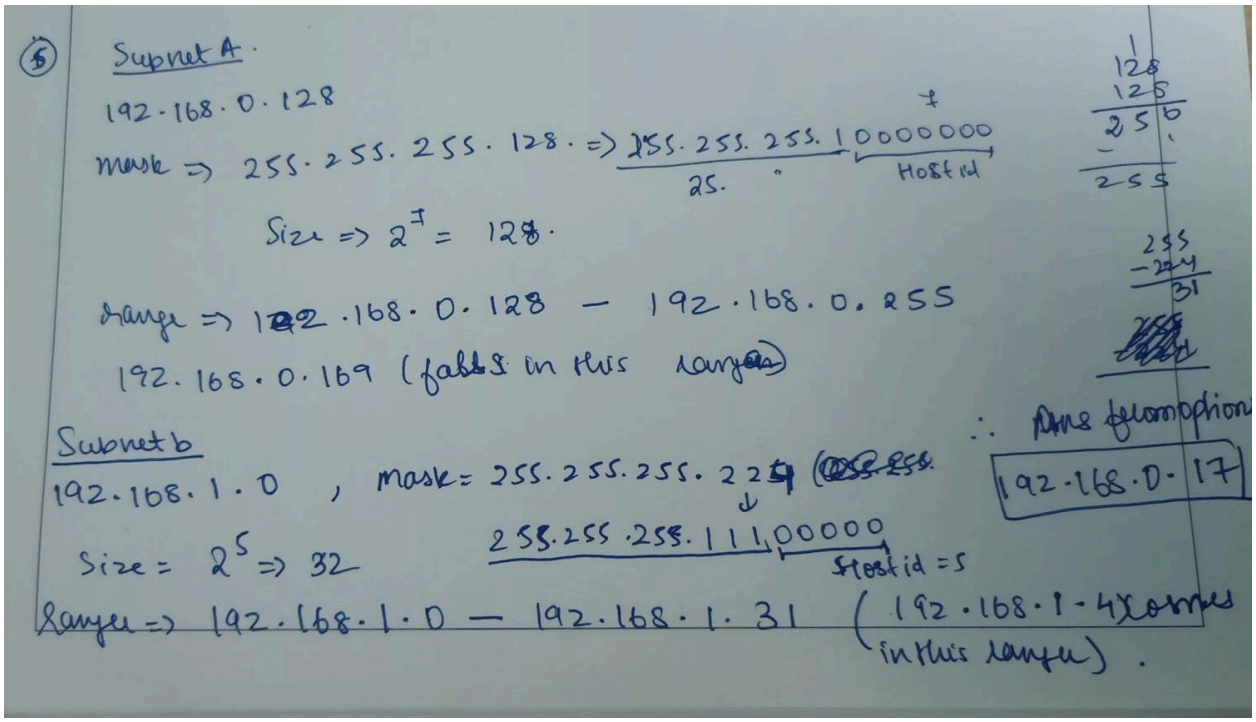

What is the most efficent subnet if you need 61 usable hosts on a subnet? Present your answer as a subnet mask (e.g. 255.255.255.128).

255.255.255.192 Submit


Show Answer Next

☐ I want only this type of question.

Yes! The correct answer is:

255.255.255.192

Count the powers of two until you find the first power of two which is above the needed amount of hosts. This is the amount of host bits you will need.

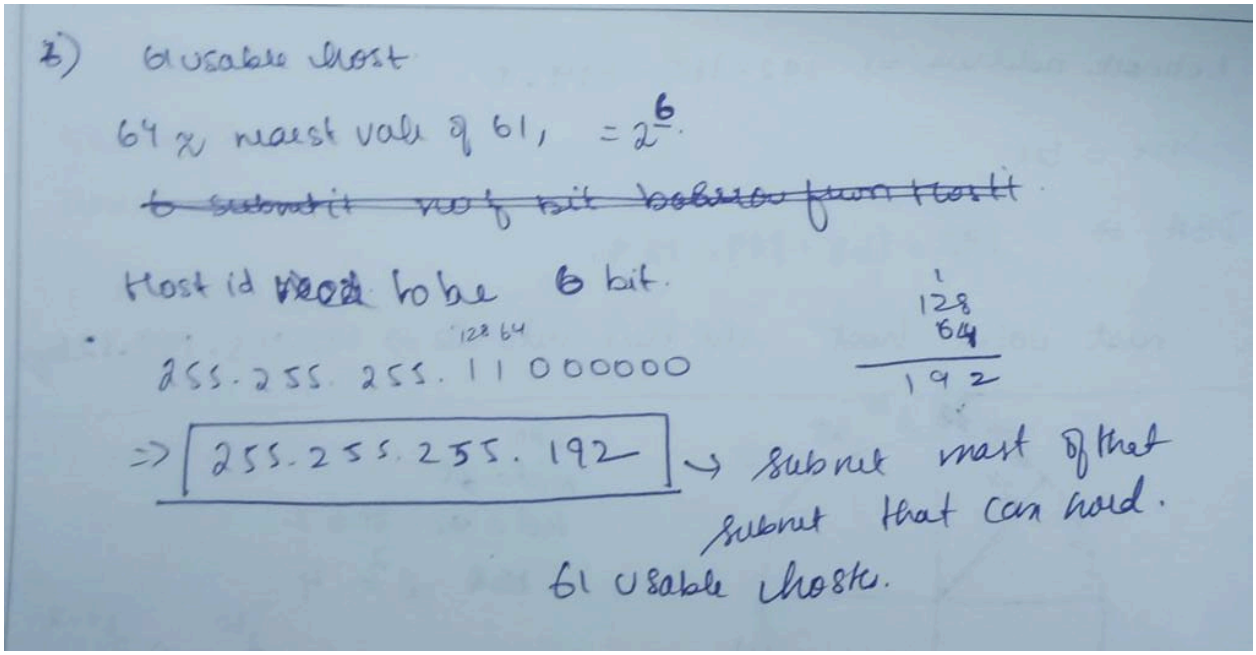

What is the maximum number of valid hosts one will have from the network 192.168.10.0 255.255.255.252

2 Submit


Show Answer Next

☐ I want only this type of question.


Yes! The correct answer is:

2

There are 2^h-2 usable hosts in a network, where h is the number of hot bits.

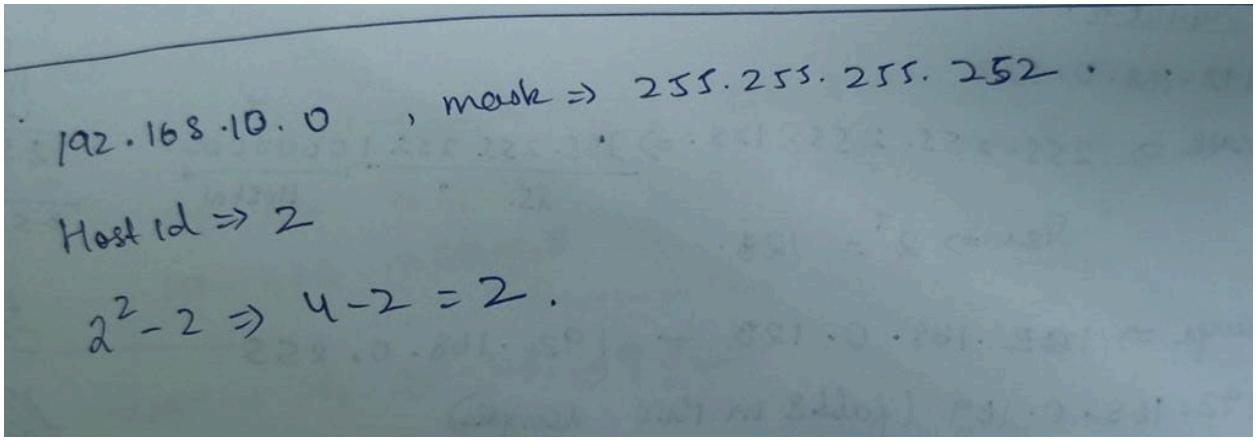

Which of the following contains more host bits? For your answer simply write 'A' or 'B'.

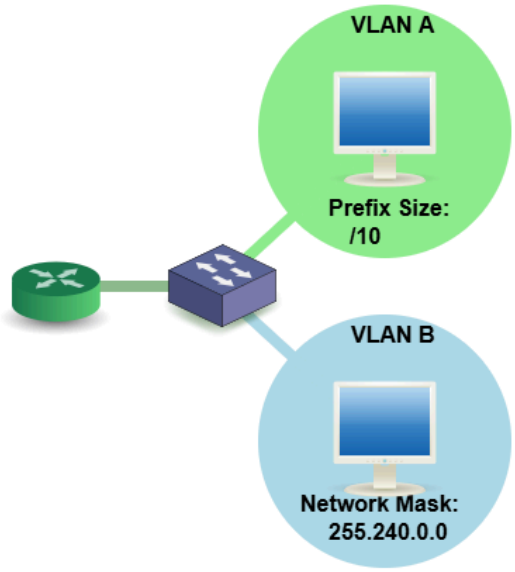

A

Submit

Show Answer Next

I want only this type of question.

Yes! The correct answer is:

A

