

ANTWERP MANAGEMENT SCHOOL

On the convergence of Clean Architecture with the Normalized Systems Theorems

*A Design Science approach of stability, evolvability and modularity on a
C# software artifact.*

Author:

Gerco Koks

Supervisor:

Prof. Dr. Ing. Hans Mulder

Promotor:

Dr. ir. Geert Haerens

Co-Promotor:

Frans Verstreken, MSc

*A thesis submitted in fulfillment of the requirements
for the degree of Master of Enterprise IT Architecture*

April 25, 2023

"The essence of science is that it is always
willing to abandon a given idea for a better one."
— *Albert Einstein* —

"Life is a series of natural and spontaneous changes.
Don't resist them; that only creates sorrow. Let reality
be reality. Let things flow naturally forward in
whatever way they like."
— *Lao Tzu* —

"The secret of change is to focus all of your energy
not on fighting the old, but on building the new."
— *Socrates* —

"Change is the only constant in life."
— *Heraclitus* —

Information

Title: On the convergence of Clean Architecture with the Normalized Systems Theorems
Subtitle: A Design Science approach of stability, evolvability and modularity on a C# software artifact.
Submission date: 15 May 2022
Language: US English
Reference Style: APA 7th Edition
Copyright © 2023 G.C. Koks
License:  This work is licensed under a CC-BY-SA 4.0 license.

Repositories

Thesis: <https://github.com/liquidvisions/master-thesis/>
artifacts: <https://github.com/liquidvisions/liquidvisions.pantharhei/>

Author

Name: Gerco Koks
Email: gerco.koks@outlook.com
LinkedIn: <https://www.linkedin.com/in/gercokoks/>

Supervisor

Name: Prof. Dr. Ing. Hans Mulder
Email: Hans.Mulder@ams.ac.be
LinkedIn: <https://www.linkedin.com/in/jbfmulder/>

Promotor

Name: Dr. ir. Geert Haerens
Email: geert.haerens@uantwerpen.be
LinkedIn: <https://www.linkedin.com/in/geerthaerens/>

Co-Promotor

Name: Frans Verstreken, MSc
Email: frans.verstreken@nsx.normalizedsystems.org
LinkedIn: <https://www.linkedin.com/in/fransverstreken/>

On the convergence of Clean Architecture with the Normalized Systems Theorems

A Design Science approach of stability, evolvability and modularity on a C# software artifact.

Gerco Koks

Abstract

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis. Donec nonummy pellentesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend consequat lorem. Sed lacinia nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec et mi. Nam vulputate metus eu enim. Vestibulum pellentesque felis eu massa.

Quisque ullamcorper placerat ipsum. Cras nibh. Morbi vel justo vitae lacus tincidunt ultrices. Lorem ipsum dolor sit amet, consectetur adipiscing elit. In hac habitasse platea dictumst. Integer tempus convallis augue. Etiam facilisis. Nunc elementum fermentum wisi. Aenean placerat. Ut imperdiet, enim sed gravida sollicitudin, felis odio placerat quam, ac pulvinar elit purus eget enim. Nunc vitae tortor. Proin tempus nibh sit amet nisl. Vivamus quis tortor vitae risus porta vehicula.

Acknowledgements

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis. Donec nonummy pellentesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend consequat lorem. Sed lacinia nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec et mi. Nam vulputate metus eu enim. Vestibulum pellentesque felis eu massa.

Quisque ullamcorper placerat ipsum. Cras nibh. Morbi vel justo vitae lacus tincidunt ultrices. Lorem ipsum dolor sit amet, consectetur adipiscing elit. In hac habitasse platea dictumst. Integer tempus convallis augue. Etiam facilisis. Nunc elementum fermentum wisi. Aenean placerat. Ut imperdiet, enim sed gravida sollicitudin, felis odio placerat quam, ac pulvinar elit purus eget enim. Nunc vitae tortor. Proin tempus nibh sit amet nisl. Vivamus quis tortor vitae risus porta vehicula.

— Gerco

Table of Contents

| | |
|--|-----------|
| Acknowledgements | i |
| Table of Contents | ii |
| 1. Introduction | 1 |
| 1.1. Introduction to Normalized Systems | 2 |
| 1.2. Introduction to Clean Architecture | 3 |
| 1.3. Research Objectives | 3 |
| 1.4. Research method | 4 |
| 1.5. Thesis outline | 5 |
| 2. Theoretical background | 6 |
| 2.1. Generic Concepts | 6 |
| 2.1.1. Modularity | 6 |
| 2.1.2. High Cohesion | 6 |
| 2.1.3. Low Coupling | 7 |
| 2.2. Normalized Systems Theory | 7 |
| 2.2.1. Stability | 7 |
| 2.2.2. Evolvability | 7 |
| 2.2.3. Combinatorial effects versus Ripple effects | 8 |
| 2.2.4. Expansion and code generation | 8 |
| 2.2.5. Harvesting and Rejuvenation | 8 |
| 2.2.6. The Design Theorems | 8 |
| 2.2.7. Normalized Elements | 9 |
| 2.3. Clean architecture | 9 |
| 2.3.1. The Design principles | 10 |
| 2.3.2. Layers and components | 12 |
| 2.3.3. The Design Elements | 13 |
| 2.3.4. The Dependency rule | 15 |
| 3. Requirements | 16 |
| 3.1. Research requirements | 16 |
| 3.2. Artifact requirements | 17 |
| 3.2.1. Artifact components | 17 |
| 3.2.2. Flow of control | 17 |
| 3.2.3. Adherence to Design principles | 18 |
| 3.2.4. Screaming Architecture | 18 |
| 3.2.5. Recurring elements | 18 |

| | |
|---|-----------|
| 4. Designing artifacts. | 20 |
| 4.1. Designing and Creating the generator artifact | 20 |
| 4.1.1. Expanders | 20 |
| 4.1.2. Plugin Architecture | 22 |
| 4.1.3. The executor object | 22 |
| 4.1.4. The meta-model | 24 |
| 4.2. Designing and generating a generated artifact | 28 |
| 4.2.1. The model | 28 |
| 4.3. Research Design Decision | 28 |
| 4.3.1. Fulfilling Research Requirement 1 | 28 |
| 5. Evaluation results | 29 |
| 5.1. Converging principles | 29 |
| 5.1.1. Converging the Single Responsibility Principle | 30 |
| 5.1.2. Converging the Open/Closed Principle | 31 |
| 5.1.3. Converging the Liskov Substitution Principle | 32 |
| 5.1.4. Converging the Interface Segregation Principle | 33 |
| 5.1.5. Converging the Interface Segregation Principle | 34 |
| 5.2. Converging elements | 35 |
| 5.2.1. Converging the Entity element | 35 |
| 5.2.2. Converging the Interactor element | 36 |
| 5.2.3. Converging the RequestModel element | 37 |
| 5.2.4. Converging the ResponseModel element | 38 |
| 5.2.5. Converging the ViewModel element | 39 |
| 5.2.6. Converging the Controller element | 40 |
| 5.2.7. Converging the Gateway element | 41 |
| 5.2.8. Converging the Presenter element | 42 |
| 5.2.9. Converging the Boundary element | 43 |
| 6. Conclusions | 44 |
| 7. Reflections | 45 |
| References | 47 |
| References to Code Samples | 49 |
| Glossary | 54 |
| Acronyms | 55 |
| A. Installing & using Pantha Rhei | 56 |
| A.1. Installation instructions | 56 |
| B. The Entity Relationship Diagram of the Meta Mode | 60 |
| C. Designs | 61 |
| C.1. Legenda | 61 |

| | |
|-------------------------------|-----------|
| C.2. Generic design | 62 |
| D. Cohesion | 63 |

1. Introduction

After my bachelor's degree in 2009, I started to work as a junior software engineer. Fully confident I was willing to accept any technical challenge as my experience up until that point led me to believe that creating some software was not that difficult at all. I could not have been more wrong. Quickly I discovered that it was a real challenge to apply new requirements to existing pieces of (legacy) software or needing to explain my craftings to the more mature engineers. The craftsmanship of software engineering was enormously challenging to me.

Determined to overcome the difficulties, I started reading and investigating and immediately recognized the Law of Increasing Complexity of Lehman (1980), where he explained the balance between the forces driving new requirements and those that slow down progress. These challenges have been recognized by other pioneers in software engineering also.

D. McIlroy (1968) proposed a vision where the systematic reuse of software building blocks should lead to more reuse. D. McIlroy (1968) quoted, "The real hero of programming is the one who writes negative code," i.e., when a change in a program source makes the number of lines of code decrease ('negative' code), while its overall quality, readability or speed improves (Wikipedia, 2023). Perhaps very early concepts of modular software constructs?

Dijkstra (1968) argued against using unstructured control flow in programming and advocated for using structured programming constructs to improve the clarity and maintainability of the source code. In addition, he advocated structured programming techniques that improved the modularity and evolvability of software artifacts.

Parnas (1972) continued with the principle of information hiding. He stated that design decisions used multiple times by a software artifact should be modularized to reduce complexity.

Over the years, I got introduced to various software design principles and philosophies like Clean Architecture (CA), increasing my knowledge and craftsmanship. My career moved more toward the arts of architecture and product management, and I have always retained my passion for software engineering.

My obsession got re-ignited during my Master's degree introduction days at the Priory of Corsendock. Jan Verelst introduced me to Normalized Systems (NS) and, I was intrigued by software stability and evolvability. It was fascinating to learn that there is now empirical scientific evidence for a quest I have been on for almost a decade.

NS Had to be the topic of my research. I was curious to compare what I knew (CA) with what science offered (NS). In early investigations, I found overlapping characteristics. nevertheless, there were also a couple of differences. Could these design approaches be used in conjunction with each other?

Java SE has primarily been used for case studies in order to develop the Normalized Systems Theory (De Bruyn et al., 2018; Oorts et al., 2014). Although sufficient in Java, I was pleased to read that both software design approaches have formulated modular structures independent of any programming technology (Mannaert & Verelst, 2009; Robert C. Martin, 2018). So I could use my favorite programming language C#, to create a software artifact that supported my research.

Based on early investigations, I instinctively found that many applications of CA are a specialization of the NS Theorems. Consequently, I hypothesized that CA and NS could be used in conjunction with each other, achieving a modular, evolvable, and stable software artifact.

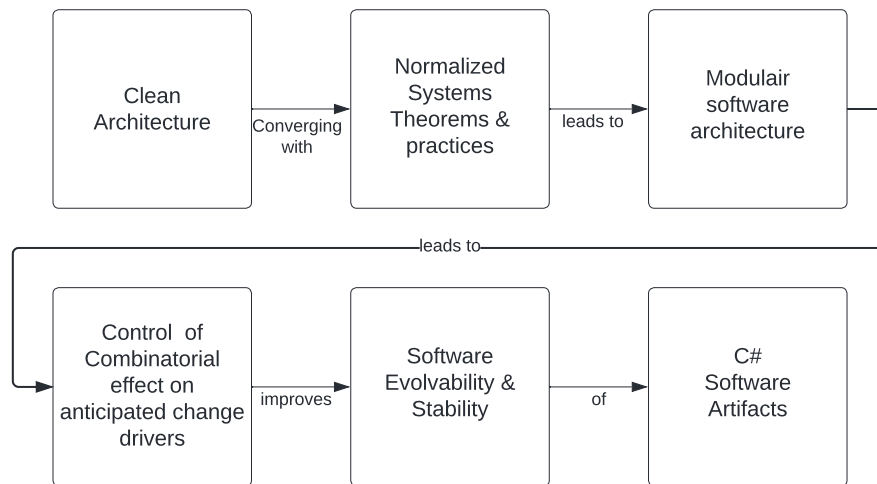


Figure 1.1.: The hypothesis

Since this research is investigating the convergence of glsca and NS, it is relevant to introduce them and discuss the concepts mentioned in the following sections.

1.1. Introduction to Normalized Systems

The NS Theory is a scientific approach to creating software systems based on the laws for software evolvability. Effectively, it prevents the accumulation of required changes to implement new requirements (Mannaert & Verelst, 2009).

Mannaert and Verelst (2009) have formulated the Theories of NS as a set of principles accompanied by structures (elements) that will lead to a highly decouples and modular software system. The result is a software architecture designed to cope with future changes.

1.2. Introduction to Clean Architecture

CA is the accumulation of more than half a century of coding, designing, and architecting software systems by Robert C. Martin. The book aims for a software architecture that minimizes the human resources required to build and maintain the information system. CA has a prescribed design of software elements that will lead to a modular architecture with low coupling and high cohesion. Additionally, the book refers to a set of design principles that prescribes how those elements should be structured or interact with each other.

1.3. Research Objectives

In this Design Science Research, we will shift the focus from Research Questions to Research Objects. The primary goal of this research is to determine the degree of convergence of CA with the NS Theory. In order to achieve this goal, the research is divided into the following objectives:

1. Literature Review

Conduct a literature review of CA and NS, focusing on their fundamental elements, principles, and real-world case studies. This review will provide a solid foundation for understanding the underlying concepts and their practical implications.

2. Architectural Designing

Create an Architectural Design fully and solely based on CA. Implement the findings of the Literature Review in the Design. This design will be the basis for the Artifact Development.

3. Artifact Development

Construct two artifacts that facilitate the research of the convergence between CA and NS Theories.

3.1. The Code Generator and Clean Architecture Expander

Inspired by NS, create a code generator based on the CA design. The generator will enable the rapid creation of software systems adhering to the principles and design of CA and allows for efficient examination of their characteristics. The Clean Architecture expander expands a RESTful API based on the same CA design as the code generator.

3.2. Expanded Clean Architecture artifact

The expanded artifact will facilitate the analysis of a RESTful API implementation and its alignment with the CA principles and design.

4. Convergence Analysis:

Analyze the artifacts to determine the degree of convergence between the principles and elements of CA and NS Theory. This analysis will involve the following:

- 4.1. An analysis per principle of CA, compared with each of the principles of NS, indicating each level of convergence per principle

- 4.2. An analysis per element of CA, compared with each of the elements of NS, indicating each level of convergence per principle

1.4. Research method

This research is a Design Science Method and relies on the Engineering Cycles as described by Wieringa (2014). The engineering cycle provides a structured approach to developing the required artifacts to analyze the design problem.

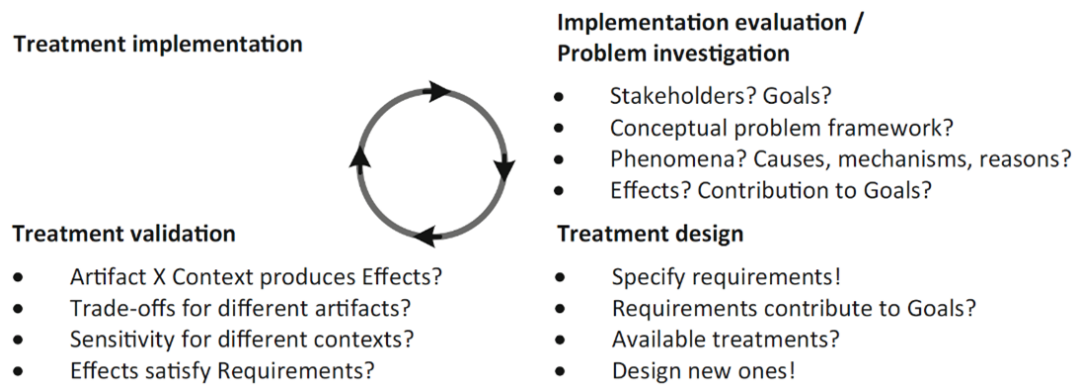


Figure 1.2.: The Engineering Cycle of Wieringa (2014)

In the context of this research, the artifacts described in chapters 4.1 and 4.2 are considered information systems. Hevner et al. proposed a framework for research in information systems by introducing the interacting relevance and rigor cycles.

Figure 1.3 depicts a specialization of the Design Science Framework of Hevner et al. (2004). The rigor cycle comprises the theories and knowledge from NS and CA, supplemented by the rigorous knowledge of modularity, evolvability, and stability of software systems. The relevance cycle represents the business needs of the stakeholders. The research requirements are described as research objectives.

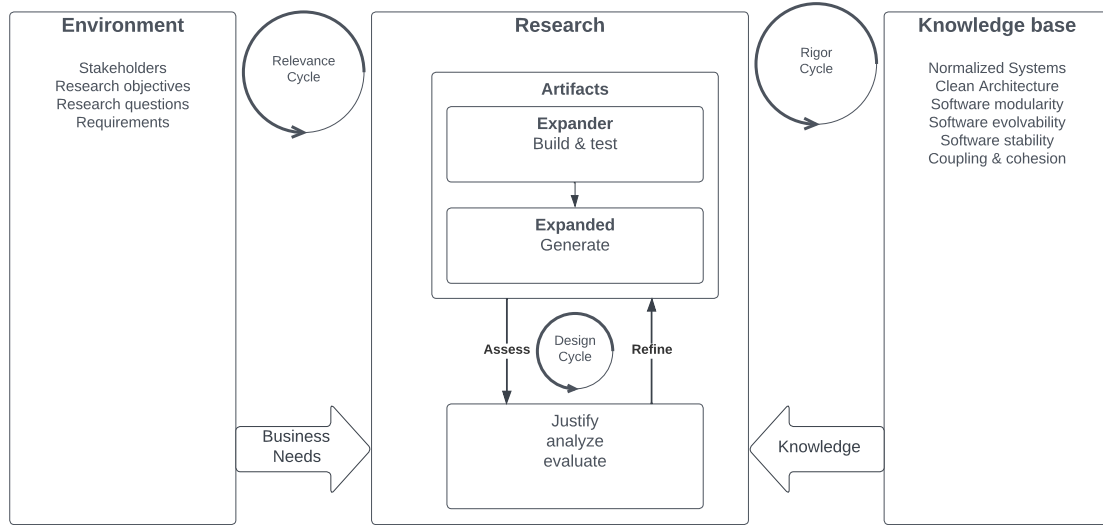


Figure 1.3.: The Design Science Framework for IS Research

1.5. Thesis outline

The structure of this thesis reflects the research methodology described in the previous section 1.4. Chapter 2 presents the theoretical backgrounds of both NS and CA, discussing important characteristics and requirements of software stability, as well as the principles and architectures proposed by both development approaches. Chapter 3 focuses on the requirements relevant to this research. It is divided into two sections: section 3.1 outlines the research requirements, describing the requirements necessary for conducting the research, while section 3.2 details the artifact requirements, laying out the requirements relevant to the artifacts contributing to this research. Chapter 4 describes all the characteristics of the design artifacts. Chapter 5 evaluates the research results, discussing the impact of using CA on NS. The conclusion of this research is presented in the final chapter, Chapter 6.

2. Theoretical background

This thesis aims to investigate whether the CA approach converges or aligns with the goals of NS. Therefore, it is essential to understand the key concepts and principles, design elements, and characteristics of both software design approaches.

This chapter starts with the concepts that apply to both CA and NS. We then will briefly refer to the essential concepts of NS, briefly discussing the design theorems and elements. Lastly, we will explore the fundamental principles that underlie CA and its proposed architectural designs.

2.1. Generic Concepts

In the upcoming sections, we will explore the fundamental ideas of modularity, cohesion, and coupling. These are all concepts that both CA and NS incorporate. Moreover, these concepts are essential to understanding the software artifacts' implementation and analysis.

2.1.1. Modularity

Both CA and NS use a slightly different definitions for the concept of modularity. Robert C. Martin (2018, p. 82) describes a module as a piece of code encapsulated in a source file with a cohesive set of functions and data structures. According to Mannaert et al. (2016, p. 22), a module is part of a system that exhibits high cohesion and operates independently of other parts. While both design approaches agree on the cohesiveness of a module's internal parts, there seems to be a slight difference in granularity in their definitions.

2.1.2. High Cohesion

Mannaert et al. (2016, p. 22) consider cohesion as modules that exist out of connected or inter-related parts of a hierarchical structure. On the other hand, Robert C. Martin (2018, p. 118) discusses cohesion in the context of components. He attributes the three component cohesion principles as crucial to grouping classes or functions into cohesive components. Cohesion is a complex and dynamic process, as the level of cohesiveness might evolve as requirements change over time. The component cohesion principles are further described in *Appendix D Cohesion*, and the beneficiary impact of applying cohesion on this research's artifacts.

2.1.3. Low Coupling

Coupling is an essential concept in software engineering related to the degree of interdependence among software modules and components. High coupling between modules indicates the strength of their relationship, whereby a high level of coupling implies a significant degree of interdependence. Conversely, low coupling signifies a weaker relationship between modules, where modifications in one module are less likely to impact others. Although not always possible, the level of coupling between the various modules of the system should be kept to a bare minimum. Both Mannaert et al. (2016, p. 23) and Robert C. Martin (2018, p. 130) agree with the idea that modules should be coupled as loosely as possible

2.2. Normalized Systems Theory

NS is a software development approach prioritizes achieving software stability through standardized, modular components and interfaces. This Theory is informed by several scientific disciplines, including systems theory, mathematics, and computer science, as well as some other software development approaches, such as agile development and domain-driven design. This thesis acknowledges the software engineering background of NS. It consistently refers to software and Information Systems as “artifacts.” However, the underlying Theory of NS can be applied to various other domains, such as Enterprise Engineering (Huysmans & Verelst, 2013), Business Process Modeling (Nuffel, 2011), and the application in TCP-IP based firewall rule base (Haerens, 2021), emphasizing the impact of NS Theory. In the following sections, we will quote all aspects of NS Theory that impacted the artifacts, their analysis, or conclusions of this research.

2.2.1. Stability

NS Theory derives the concept of stability from systems theory. It is considered a crucial property. Mannaert et al. (2016, p. 270) describe that stable software is not excessively sensitive to small changes. The number of changes required for new versions of the system is not dependent on the size of that system. Conversely, instabilities occur when the total number of changes relies on the size of the system. The bigger the size of the system, the more changes are required to implement the requirement. Mannaert et al. (2016, p. 271) refer to these instabilities’ Combinatorial Effect

2.2.2. Evolvability

In section 2.2.1, it was highlighted that stability in a system is achieved when it exhibits low sensitivity to minor changes, regardless of the system’s size. On the other hand, evolvability refers to a system’s ability to adapt and adjust to changing requirements continuously. Time is a critical factor here, as systems are often easier to maintain during the initial stages. Evolvability, however, relates to the system’s ability to evolve and adapt independently of time.

2.2.3. Combinatorial effects versus Ripple effects

Combinatorial Effects and Ripple Effects are characteristics often used in NS Theory. Both are closely related to the challenges of maintaining evolvable systems but are certainly not interchangeable. A Ripple Effect is referred to indicate the total amount of changes that are required to adhere to new requirements, while Combinatorial Effect is the manifestation of instability and refers to an increasing amount of changes (ripple) as an effect of new requirements.

2.2.4. Expansion and code generation

Creating and maintaining a stable and evolvable system is, according to Mannaert et al. (2016, p. 403), a particularly challenging, repetitive, and meticulous engineering job. Developers must have a sound knowledge of NS while implementing new requirements in an always consistent manner. Mannaert et al. (2016, p. 403) propose to automate the instantiation process of software structures by using code generation for recurring tasks

2.2.5. Harvesting and Rejuvenation

Expansion and code generation should embrace manually added craftings on parts of the system where automation is not possible or desirable. These craftings are preserved after each expansion by a method that is called harvesting and rejuvenation (Mannaert et al., 2016, pp. 405–406).

2.2.6. The Design Theorems

In the following table we will describe the Design Theorems of NS, firstly presented by Mannaert and Verelst (2009, pp. 111–119). They are known as Separation Of Concerns (SoC), Data Version Transparency (DvT), Action Version Transparency (AvT) and Separation of State (SoS).

| Principle | Definition |
|-----------|--|
| SoC | NS has adopted the SoC principle. However, Mannaert and Verelst (2009, p. 112) defined a more strict definition. <i>A processing function can only contain a single task to achieve stability.</i> |
| DvT | A data structure that is passed through the interface of a processing function needs to exhibit version transparency to achieve stability. |
| AvT | A processing function that is called by another processing function, needs to exhibit version transparency to achieve stability. |
| SoS | Calling a processing function within another processing function, needs to exhibit state keeping to achieve stability. |

Table 2.1.: The Design Theorems of Normalized Systems.

2.2.7. Normalized Elements

In the context of the NS Theory approach, the goal is to design evolvable software, independent of the underlying technology. Nevertheless, when implementing the software and its components, a particular technology must be chosen. For Object Oriented Programming Languages like Java, the following Normalized Elements have been proposed (Mannaert et al., 2016)[363-398]. It is essential to recognize that different programming languages may necessitate alternative constructs (Mannaert et al., 2016)[364].

| Element | Description |
|-----------|---|
| Data | This object represents a piece of data in the system. Data elements are used to pass information between processing functions and other objects. In NS, data elements are typically standardized to ensure consistency across the system. |
| Task | This object represents a specific task or action in the system. Tasks can be composed of one or more processing functions and can be used to represent complex operations within the system. |
| Connector | This object is used to connect different parts of the system. Connectors can link processing functions, data elements, and other objects to work together seamlessly. |
| Flow | This object represents the flow of control through the system. It determines the order in which processing functions are executed and can be used to handle error conditions or other exceptional cases. |
| Trigger | A trigger represents an object that reacts to specific events or changes in the system by executing predefined actions. |

Table 2.2.: The Elements proposed by Normalized Systems Theory

2.3. Clean architecture

CA is a software design approach that emphasizes the organization of code into independent, modular layers with distinct responsibilities. This approach aims to create more flexible, maintainable, and testable software systems by enforcing the separation of concerns and minimizing dependencies between components. The goal of clean architecture is to provide a solid foundation for software development, allowing developers to build applications that can adapt to changing requirements, scale effectively, and remain resilient against the introduction of bugs (Robert C. Martin, 2018).

2.3.1. The Design principles

Robert C. Martin (2018, p. 78) argues that software can quickly become a well-intended mess of bricks and building blocks without a rigorous set of design principles. So, from the early 1980s, he began to assemble a set of software design principles as guidelines to create software structures that tolerate change and are easy to understand. The principles are intended to promote modular and component-level software structure (Robert C. Martin, 2018, p. 79). In 2004 the arrangement of the principles was definitively arranged to form the acronym SOLID.

The upcoming sections will provide an overview of each of the SOLID principles.

The Single Responsibility Principle

This principle has gone through several iterations of the formal definition. The final definition of the Single Responsibility Principle (SRP) is: *a module should be responsible to one, and only one, actor* (Robert C. Martin, 2018, p. 82). The word actor in this statement refers to all the users and stakeholders represented by the (functional) requirements. The modularity concept in this definition is described by Robert C. Martin (2018, p. 82) as a cohesive set of functions and data structures.

In conclusion, this principle allows for modules with multiple tasks as long as they cohesively belong together. Robert C. Martin (2018, p. 81) acknowledges the slightly inappropriate name of the principle, as many interpreted it that a module should do just one thing.

The Open-Closed Principle

Meyer (1988) first mentioned the Open/Closed Principle (OCP) and formulated the following definition: *A module should be open for extension but closed for modification.* The software architecture should be designed such that the behavior of a module can be extended without modifying existing source code. The OCP promotes the use of abstraction and polymorphism to achieve this goal. The OCP is one of the driving forces behind the software architecture of systems making it relatively easy to apply new requirements. (Robert C. Martin, 2018, p. 94).

The Liskov Substitution Principle

The Liskov Substitution Principle (LSP) is named after Barbara Liskov, who first introduced the principle in a paper she co-authored in 1987. Barbara Liskov wrote the following statement to define subtypes (Robert C. Martin, 2018, p. 95).

If for each object $o1$ of type S , there is an object $o2$ of type T such that for all programs P defined in terms of T , the behavior of P is unchanged when $o1$ is substituted for $o2$ then S is a subtype of T . Or in simpler terms: To build Software from interchangeable parts, those parts must adhere to a contract that allows those parts to be substituted for an other (Robert C. Martin, 2018, p. 80)

The Interface Segregation Principle

The Interface Segregation Principle (ISP) suggests that software components should have narrow, specific interfaces rather than broad, general-purpose ones. In addition, the ISP states that consumer code should not be allowed to depend on methods it does not use. In other words, interfaces should be designed to be as small and focused as possible, containing only the methods relevant to the consumer code using them. This allows for the consumer code to use only the needed methods without being forced to implement or depend on unnecessary methods (Robert C. Martin, 2018, p. 104).

The Dependency Inversion Principle

TODO: explain how dependency injection can benefit the implementation and align with 5.5

The Dependency Inversion Principle (DIP) prescribes that high-level modules should not depend on low-level modules, and that both should depend on abstractions. The principle emphasizes that the architecture should be designed in such a way that the flow of control between the different objects, layers and components are always from higher-level implementations to lower-level details.

In other words, high-level implementations like business rules, should not be concerned about low-level implementations, such as the way the data is stored or presented to the end user. Additionally, both the high-level and low-level implementations should only depend on abstractions or interfaces that define a contract for how they should interact with each other (Robert C. Martin, 2018, p. 109).

This approach allows for great flexibility and a modular architecture. Modifications in the low-level implementations will not affect the high-level implementations as long as they still adhere to the contract defined by the abstractions and interfaces. Similarly, changes to the high-level modules will not affect the low-level modules as long as they still fulfill the contract. This reduces coupling and ensures the evolvability system over time, as changes can be made to specific modules without affecting the rest of the system.

Manifestations in the artifacts are ample. One of which is the consistent use of the Dependency Injection pattern. In order to prevent the risks of displacing and dispersing dependencies all over the system (Mannaert et al., 2016, p. 214) we are using dependency containers. Each module is maintaining its own dependencies, which are bootstrapped at application startup (see Listing 2.1) (Koks, 2023d).

```
1 // ... other code
2 cmd.OnExecute(() =>
3 {
4     var provider = new ServiceCollection()
5         .AddConsole()
6         .AddDomainLayer()
7         .AddApplicationLayer()
8         .AddEntityFrameworkLayer()
9         .AddInfrastructureLayer()
10        .BuildServiceProvider();
11
12    // ... other code
13 });
```

```

14
15 // ... other code

```

Listing 2.1: Bootstrapping the dependencies of each component/layer of the generator artifact.

A more abstract example is the separation of required modules into separate component libraries. This applies to both the generated and generator artifact (see Figure 2.1). The actual compliance to the DIP is how the flow of control between the components is organized. This is accurately depicted in Figure 2.2 Flow of control.

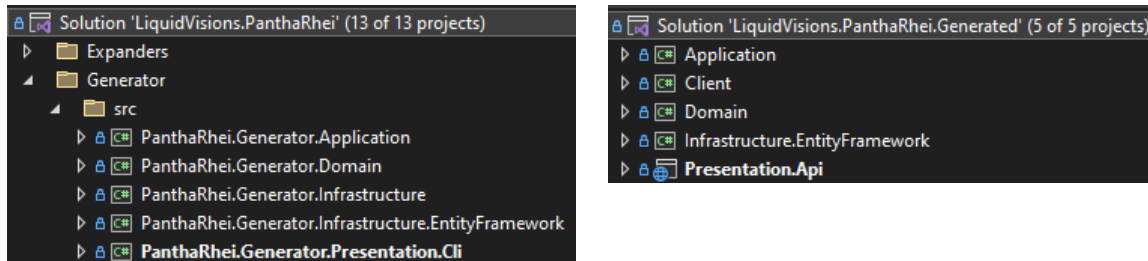


Figure 2.1.: Separation of component libraries.

2.3.2. Layers and components

CA organizes software systems into distinct layers or components, each with its own responsibilities. This structure promotes the separation of concerns, maintainability, testability, and adaptability. The following section is a short description of each of the layers (Robert C. Martin, 2018).

Domain layer

This layer contains the core business objects, rules, and domain logic of the application. Entities represent the fundamental concepts and relationships in the problem domain and are independent of any specific technology or framework. The domain layer focuses on encapsulating the essential complexity of the system and should be kept as pure as possible.

Application layer

This layer contains the use cases or application-specific business rules that orchestrate the interaction between entities and external systems. Use cases define the behavior of the application in terms of the actions users can perform and the expected outcomes. This layer is responsible for coordinating the flow of data between the domain layer and the presentation or infrastructure layers, while remaining agnostic to the specifics of the user interface or external dependencies.

Presentation layer

This layer is responsible for translating data and interactions between the use cases and external actors, such as users or external systems. Interface adapters include components like controllers, view models, presenters, and data mappers, which handle user input, format data for display, and convert data between internal and external representations. The presentation layer should be as thin as possible, focusing on the mechanics of user interaction and deferring application logic to the use cases.

Infrastructure layer

This layer contains the technical implementations of external systems and dependencies, such as databases, web services, file systems, or third-party libraries. The infrastructure layer provides concrete implementations of the interfaces and abstractions defined in the other layers, allowing the core application to remain decoupled from specific technologies or frameworks. This layer is also responsible for any configuration or initialization code required to set up the system's runtime environment.

By organizing code into these layers and adhering to the principles of CA, developers can create software systems that are more flexible, maintainable, and testable, with well-defined boundaries and separation of concerns.

2.3.3. The Design Elements

In the context of NS approach, the goal is to design a software system that is highly modular, maintainable and testable. The accumulation of the Design principles discussed in chapter 2.3.1 leads to the following generalization of the architecture. Each of the following elements has a crucial role to achieve the design goals.

Entities

Entities are the core business objects of the application, representing the fundamental concepts and rules of the domain. They encapsulate the data and behavior that are essential to the application's functionality.

Interactors

Interactors, also known as Use cases, encapsulate the application's business logic and represent specific actions that can be performed by the system. They are responsible for coordinating the work of other components and ensuring that the system behaves correctly.

RequestModels

RequestModels are used to represent the data required by a specific interactor. They provide a clear and concise representation of the data required by the Use Case, making it easier to manage and modify the application.

ViewModels

ViewModels are part of the presentation layer and are responsible for managing the state of the user interface. They receive data from the Presenters and update the user interface accordingly. They are also responsible for handling user input and sending it to the Controllers for processing.

Controllers

Controllers are responsible for handling requests from the user interface and routing them to the appropriate Interactor. They are typically part of the user interface layer and are responsible for coordinating the work of other components.

Presenters

Presenters are responsible for formatting and presenting data to the user interface. They receive data from the Interactor and convert it into a format that can be easily displayed to the user. They are also responsible for handling user input and sending it back to the Interactor for processing.

Gateways

A *Gateway* provides an abstraction layer between the application and its external dependencies, such as databases, web services, or other systems. They allow the system to be decoupled from its external dependencies and can be easily replaced or adapted if needed.

Boundaries

A *Boundary* refers to an interface or abstraction that separates different layers or components of a system. The purpose of these boundaries is to promote modularity, evolvability and testability by enforcing the separation of concerns, allowing each layer to evolve independently.

2.3.4. The Dependency rule

An essential aspect is described as the dependency rule. The rule has been stated as followed (Robert C. Martin, 2018, p. 206).

The flow of control

Source code dependencies must point only inward, toward higher-level policies

The flow of control is intended to follow the DIP and can be represented schematically as concentric circles containing all the components described in chapter 2.3.2. The arrows in Figure 2.2 clearly show that the dependencies flow from the outer layers to the inner layers. This ensures that the domain logic can evolve independently from external dependencies or certain specific technologies. Additionally, it separated the application and domain logic from how it is presented to the user.

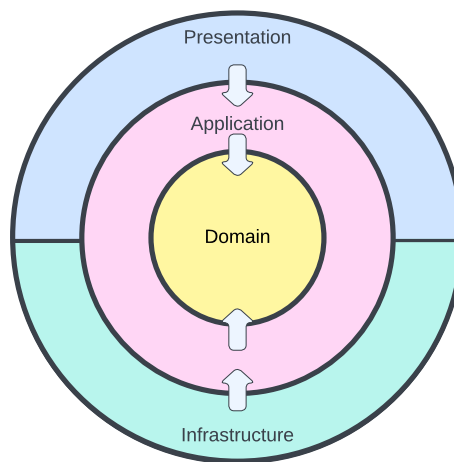


Figure 2.2.: Flow of control

3. Requirements

In this chapter, we will explain that the artifact requirements are composed of two distinct parts. The research aims to examine the level of convergence between CA and NS. As such, the design and architecture requirements are intentionally, and entirely based on the principles and design approach of CA. A full description of this requirement can be found in section 3.2. In order to analyze the level of convergence, the artifacts need to comply with the evolvability requirements of the theory of NS, described in section 3.1 of this chapter.

3.1. Research requirements

In order to address the research objectives we outlined in Chapter 1.3, we need to know what violations in the context of NS can occur in a software artifact. In chapters 2.2 we have shown that NS attempts to achieve evolvability by achieving stability. Through the extensive and consistent use of the NS theorems, a modular design emerges that is free of instabilities. Alternatively, in terms used by the NS theorem: the absence of combinatorial effects. However, as described in section 3.2, the artifacts are designed based on the principles and design approach of CA. The NS theorems are not considered using the design phase of the artifacts.

To be able to analyze the stability of the artifacts the following functional requirement specifications are reused (Mannaert et al., 2016, pp. 254–259). They are noted without the mathematical formulas that are present in cited sources.

Research Requirement 1

An information system needs to be able to represent instances of data entities. A data entity consists of several data fields. Such a field may be a basic data field representing a value of a reference to another data entity.

Research Requirement 2

An information system needs to be able to execute processing actions on instances of data entities. A processing action consists of several consecutive processing tasks. Such a task may be a basic task, i.e., a unit of processing that can change independently, or an invocation of another processing action.

Research Requirement 3

An information system needs to be able to input or output values of instances of data entities through connectors.

Research Requirement 4

An existing information system representing a set of data entities, needs to be able to represent:

- *a new version of a data entity that corresponds to including an additional data field*
- *an additional data entity*

Research Requirement 5

An existing information system providing a set of processing actions, needs to be able to provide:

- *a new version of a processing task, whose use may be mandatory*
- *a new version of a processing action, whose use may be mandatory*
- *an additional processing task*
- *an additional processing action*

3.2. Artifact requirements

The artifacts adhere to the design approach of CA, described in chapter 2.3, as much as possible. In order to do so the following requirements are to be applied.

3.2.1. Artifact components

In 2.3.2 Layers and components we describe that in a typical application, one of the goals of CA is to separate the domain logic from Impl details like (user) interface or storage mechanisms. Therefore, the artifact must follow the layered architecture of CA (see figure 2.2)

In the case of the Designing and Creating the generator artifact there are two separate infrastructure layers. The first one has a dependency on EntityFrameworkCore¹ technology for data persistence in an Azure SQL database. The other one handles persistence by serialization of data on a windows machine.

3.2.2. Flow of control

One of the Single Responsibility Principle, Open/Closed Principle, Liskov Substitution Principle, Interface Segregation Principle, Dependency Inversion Principle (DIP) design principles is the Dependency Inversion Principle (DIP). This principle affects the. As described in 2.3.4 The Dependency rule, this affects the flow of control of the artifacts components. To achieve

¹<https://learn.microsoft.com/en-us/ef/core/>

the evolvability of each of the components, the flow of control must adhere to the following statement. This is also depicted in Figure 2.2.

The component dependencies must point only inward, toward higher-level policies. To make it more strict, the Presentation and infrastructure layers only depend on the Application layer. The Application layer only depends on the Domain Layer.

3.2.3. Adherence to Design principles

In 2.3.1 The Design principles we describe what needs to be done to adhere to the SOLID design principles. Each design pattern that is applied to the architecture of artifacts adheres at least to one of the SOLID principles.

3.2.4. Screaming Architecture

The essence of Screaming Architecture is to design a system where the structure and purpose of each component and layer are immediately apparent to anyone looking at it. This is achieved through clear and consistent naming conventions of the classes, namespaces and, components.

In the literature of CA, there is no mention of rules or recommendations for naming conventions. The most commonly practiced naming convention of nouns (for data entities) and verbs (for actions) will be used. This is also advocated by the literature of NS (Mannaert et al., 2016, p. 357).

Table 3.1 lists the required naming convention for the different layers, whereas table 3.2 lists the naming convention of the recurring elements. For more information about these elements see 2.3.3.

| Component | Filename | Namespace |
|----------------|------------------------------|--|
| Domain | [Prod].Domain | [Company].[Prod].Domain |
| Application | [Prod].Application | [Company].[Prod].Application |
| Presentation | [Prod].Presentation.[Tech] | [Company].[Prod].Presentation.[Tech] |
| Infrastructure | [Prod].Infrastructure.[Tech] | [Company].[Prod].Infrastructure.[Tech] |

Table 3.1.: Naming convention components

3.2.5. Recurring elements

For each data entity defined in the model (see chapter 4.2.1), a fixed set of required elements, listed in table 3.2 will be added to the appropriate component, to comply with the design of the architecture.

TODO: requirement mbt code expansion toevoegen (pag 403)

| Component | Element type | Naming Convention |
|----------------|-------------------------|------------------------------------|
| Presentation | Controller Impl | <i>Noun</i> Controller |
| | ViewModelMapper Impl | <i>Noun</i> ViewModelMapper |
| | Presenter Impl | <i>VerbNoun</i> Presenter |
| | ViewModel Impl | <i>Noun</i> ViewModel |
| | DI Bootstrapper | DependencyInjectionBootstrapper |
| Application | Boundary Impl | <i>VerbNoun</i> Boundary |
| | Boundary interface | IBoundary |
| | Gateway interface | I <i>Verb</i> Gateway |
| | Interactor interface | I <i>Verb</i> Interactor |
| | Interactor Impl | <i>VerbNoun</i> Interactor |
| | Mapper Interface | IMapper |
| | RequestModelMapper Impl | <i>VerbNoun</i> RequestModelMapper |
| | Presenter Interface | IPresenter |
| | Validator Interface | IValidator |
| | Validator Impl | <i>VerbNoun</i> Validator |
| | DI Bootstrapper | DependencyInjectionBootstrapper |
| Infrastructure | Gateway Impl | <i>Noun</i> Repository |
| | DI Bootstrapper | DependencyInjectionBootstrapper |
| Domain | Data Entity Impl | <i>Noun</i> |
| | DI Bootstrapper | DependencyInjectionBootstrapper |

Table 3.2.: Naming convention of recurring elements

4. Designing artifacts.

4.1. Designing and Creating the generator artifact

In the previous chapters, we discussed the importance of software stability and evolvability in order to cope with the continuously changing business and technological requirements. Although considered from a much broader perspective, the Greek philosopher *Heraclitus* described this state of constant *flux* with his famous statement *Pantha Rhei*. His statement was the main inspiration for the name of the generator artifact.

The following sections discuss the design, implementations and functionality of the Pantha Rhei, the generator artifact. The artifact is created in fulfillment of this research. Whereas the name of the artifact was inspired by Heraclitus, the functional idea behind the artifact was inspired by the theory behind NS and by the Prime Radiant application of the company NSX¹. The concept of code generation in order to achieve stable and evolvable software is one of the important aspects of NS.

For the interested readers of this thesis, it is rather simple to install the Pantha Rhei application by following the instruction in the appendix A Installing & using Pantha Rhei.

4.1.1. Expanders

As described in section 4.1, and portraited in figure 4.1, expanders are used as plugins by the Pantha Rhei expander artifact. There are a couple of prerequisites applicable before the expander can be dynamically loaded as a plugin at runtime.

Prerequisite 1: Project dependency

The expander should have a dependency on the Dynamic Link Library (DLL) of the project “PanthaRheiGeneratorDomain” (Koks, 2023k).

¹<https://normalizedsystems.org/prime-radiant/>

Prerequisite 2: Implements “*IExpanderInteractor*”

In order to behave like an expander, one should behave like an expander. This is done by implementing the “*IExpanderInteractor*” (Koks, 2023g) interface. Although not required, it is strongly recommended to use the abstract “*AbstractExpander*” (Koks, 2023a) as it contains all the routines required implementations of “*IExecutionInteractor*” (Koks, 2023e) like Harvesters, Rejuvenators, Pre-, and PostProcessors.

Prerequisite 3: Implements “*AbstractExpanderDependencyManagerInteractor*”

The Dependency Injection pattern is an exciting and beneficiary pattern that entirely adheres to the DIP principle. By implementing the abstract “*AbstractExpanderDependencyManagerInteractor*” (Koks, 2023b) all, for the expander specific implementations of the following interfaces will automatically be registered and made available for runtime processing.

- The expander which should be an implementation of “*IExpanderInteractor*” (Koks, 2023g) or “*AbstractExpander*” (Koks, 2023a)
- When applicable, the expander handlers, which should be an implementation of “*IExpanderHandlerInteractor*” (Koks, 2023f)
- The default “*RegionHarvesterInteractor*” (Koks, 2023n) will automatically be executed during the generation process.
- Specific implementations of Harvesters, which should be an implementation of “*IHarvesterInteractor*” (Koks, 2023h)
- The default “*RegionRejuvenatorInteractor*” (Koks, 2023o) will automatically be executed during the generation process.
- Specific implementations of Rejuvenators, which should be an implementation of “*IRejuvenatorInteractor*” (Koks, 2023j)
- The default PostProcessor “*InstallDotNetTemplateInteractor*” (Koks, 2023i) will automatically be executed during the generation process.
- Specific implementation of PostProcessors, which should be an implementation of “*PostProcessorInteractor*” (Koks, 2023l)
- The default PreProcessor “*UnInstallDotNetTemplateInteractor*” (Koks, 2023p) will automatically be executed during the generation process.
- Specific implementation of PreProcessors, which should be an implementation of “*PreProcessorInteractor*” (Koks, 2023m)

4.1.2. Plugin Architecture

When all preconditions are met and the expander is compiled, the expander consists of a DLL and a set of templates. The Generator artifact considers the expanders as optional plugins, which are dynamically loaded at runtime, through a method called assembly-binding. See section 4.1.1 Expanders for a full explanation of the required preconditions.

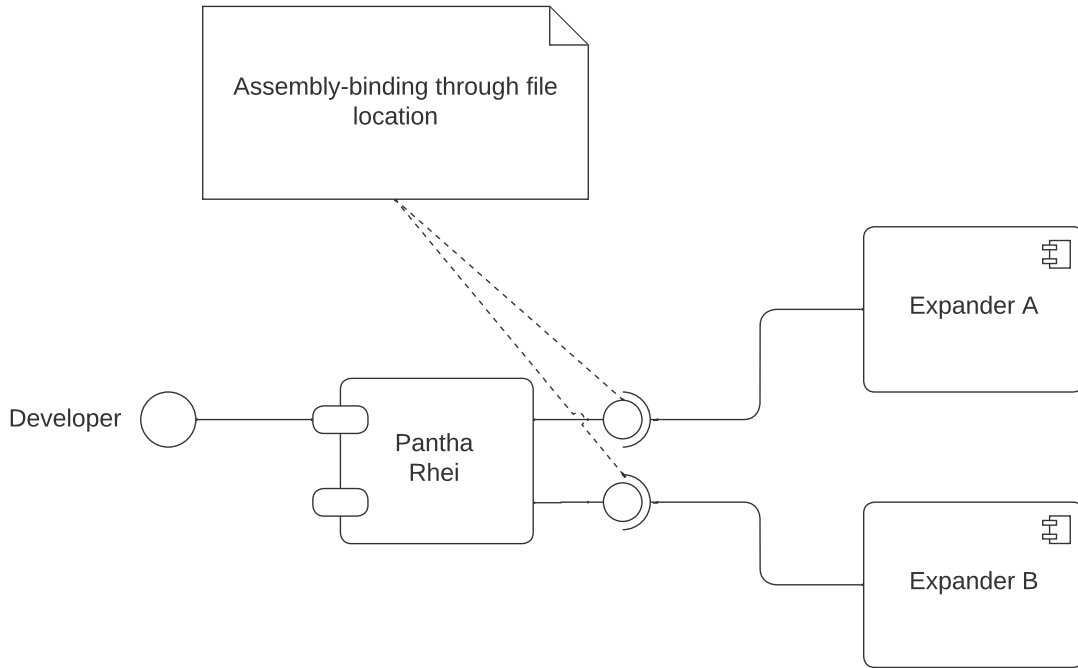


Figure 4.1.: Expanders are considered plugins

By implementing the expanders as plugins, the design adheres to several SOLID principles. First and foremost, Single Responsibility Principle (SRP) is respected because an expander should generate one, and precisely one construct (Mannaert et al., 2016, p. 403). In the case of this research, this construct is an application following the design and principles of the design approach of CA with a Restful API interface. Furthermore, it supports the OCP principles because developers can introduce a new version of the expander as a separate plugin if this is required. LSP. By extension, this also adheres to the LSP principle, as expanders can be replaced with other implementations of expanders, without affecting the rest of the application.

4.1.3. The executer object

A vital implementation that facilitates a high degree of cohesion, whilst maintaining low coupling and adhering to the SRP principle is the use of the “[IExecutionInteractor](#)” (Koks, 2023e) interface. The generation process is designed to execute “tasks” in a predefined order. By using

the “*IExecutionInteractor*” it is possible to design each of the tasks as separate classes, entirely complying, or enabling all of the SOLID principles. The

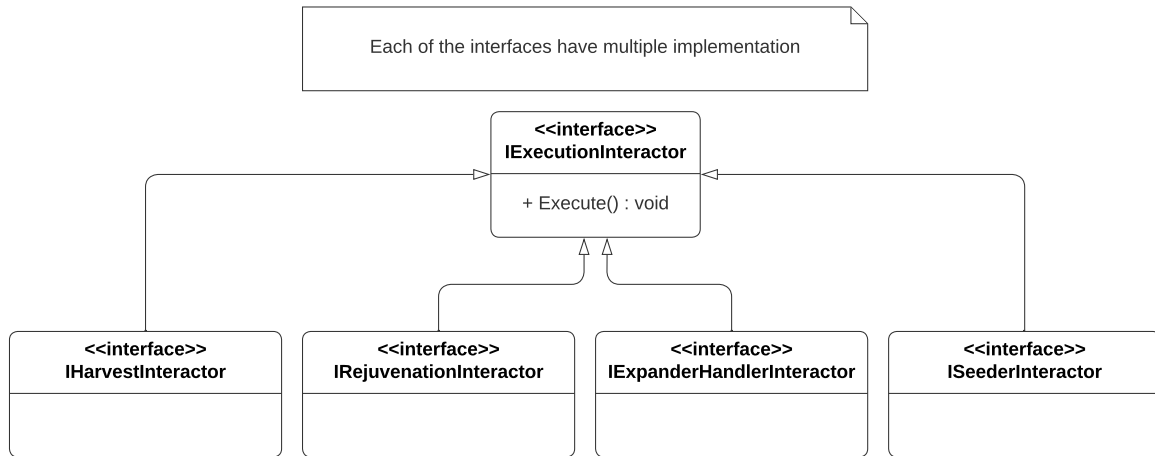


Figure 4.2.: Both high cohesion and low coupling by using the “*IExecutionInteractor*”

As depicted in listing 4.1, this design leads to a cohesive design where all tasks are gracefully executed from a single point in the application.

```

1  /// <summary>
2  /// Implements the contract <seealso cref="ICodeGeneratorInteractor"/>.
3  /// </summary>
4  internal sealed class CodeGeneratorInteractor : ICodeGeneratorInteractor
5  {
6      // ... other code
7
8      /// <inheritdoc/>
9      public void Execute()
10     {
11         foreach (IExpanderInteractor expander in expanders
12             .OrderBy(x => x.Model.Order))
13         {
14             expander.Harvest();
15
16             Clean();
17
18             expander.PreProcess();
19             expander.Expand();
20             expander.Rejuvenate();
21             expander.PostProcess();
22         }
23     }
24
25     // ... other code
26 }

```

Listing 4.1: The “CodeGeneratorInteractor”

4.1.4. The meta-model

The meta-model is a higher-level abstraction of the model that is used to describe the characteristics of a software system in the context of this research. It contains the essential characteristics that are needed in order to generate software applications and components. It contains the structures, entities and relationships within the Generated Artifact. Having a meta-model ensures a standardized way to describe and define the software components and their interactions, enabling the design and analysis of modular, evolvable, and scalable software systems.

In this context, the meta-model serves as a blueprint for the software system, describing its components, such as entities, fields, relationships, and expanders, along with their attributes and constraints. The meta-model is used to generate the Generated Artifact (4.2). Moreover, it is potentially reusable for other types of applications, which should lead to the same characteristics of stability and evolvability as the one used for this research.

The following sections describe all the entities that are part of the meta-model. These entities are the basis of the Entity Relation Diagram (ERD) depicted in Appendix B. The ERD is the official model representing the meta-model.

The App entity

The App entity represents an application and is regarded as the highest entry point for the Generator artifact. The App Entity and subsequent entities contain all the information needed to generate the Generated Artifact described in section 4.2.

| Name | Data Type | Description |
|-------------------|----------------------------|--|
| Id | Guid | Unique identifier of the application |
| Name | string | Name of the application |
| FullName | string | Full name of the application |
| Expanders | List of Expanders | The Expanders that will be used during the generation process. |
| Entities | List of Entities | The Entities that are applicable for the Generated artifact. |
| ConnectionStrings | List of Connection-Strings | The ConnectionString to the database that is used by the Generator Artifact. |

Table 4.1.: The fields of the App entity

The Component entity

The Component entity represents a software component that can be part of an application. Based on this entity the Generator Artifact can make design time on where to place certain elements

| Name | DataType | Description |
|-------------|-----------------|---|
| Id | Guid | Unique identifier of the component |
| Name | string | Name of the component |
| Description | string | Description of the component |
| Packages | List of Package | The Packages that should be applied to the component. |
| Expander | Expander | Navigation property to the Expander entity. |

Table 4.2.: The fields of the Component entity

The ConnectionString entity

The ConnectionString entity represents a ConnectionString used by an application to connect to a database or other external system.

| Name | DataType | Description |
|-------------|-----------------|---|
| Id | Guid | Unique identifier of the ConnectionString |
| Name | string | Name of the ConnectionString |
| Definition | string | Definition of the ConnectionString |
| App | App | Navigation property to the App entity |

Table 4.3.: The fields of the ConnectionString entity

The Entity entity

The Entity entity represents an entity in the application's data model.

| Name | DataType | Description |
|-------------------|-----------------------|---|
| Id | Guid | Unique identifier of the entity |
| Name | string | Name of the entity |
| Callsite | string | The source code location where the entity is defined. In the case of a C# artifact, this is to determine the name of the namespace. |
| Type | string | Type of the entity |
| Modifier | string | Modifier of the entity (e.g. public, private) |
| Behavior | string | The behavior of the entity (e.g. abstract, virtual) |
| App | App | Navigation property to the App entity. |
| Fields | List of Fields | The Fields property represents a collection of the fields that make up the entity. |
| ReferencedIn | List of Fields | Represents a navigation property to a Field that uses the current entity as a return type. |
| Relations | List of Relationships | List of relationships involving this entity |
| IsForeignEntityOf | List of Relationships | List of relationships where this entity is the foreign entity |

Table 4.4.: The fields of the Entity entity

The Expander entity

The Expander entity represents an expander, which is responsible for generating code for an application. The Generator Artifact attempts to execute all expanders that are related to the selected App.

| Name | DataType | Description |
|----------------|--------------------|---|
| Id | Guid | Unique identifier of the expander |
| Name | string | Name of the expander |
| TemplateFolder | string | relative path to the templates that are used by the expander. |
| Order | int | The order in which the expander is executed |
| Apps | List of Apps | List of applications associated with the expander. |
| Components | List of Components | List of components associated with the expander |

Table 4.5.: The fields of the Expander entity

The Field entity

The Field entity represents a field or property of an entity in an application's data model. Each field has a unique ID, name, and other properties such as its return type, modifiers, and behavior. It can be associated with an entity and can have relationships with other entities.

The `IsKey` and `IsIndex` properties indicate whether the field is part of the primary key or an index of the entity, respectively.

| Name | DataType | Description |
|----------------------|-----------------------|--|
| Id | Guid | Unique identifier of the field |
| Name | string | Name of the field |
| ReturnType | string | Return type of the field |
| IsCollection | bool | Whether the field is a collection or not |
| Modifier | string | Modifier of the field (e.g. public, private) |
| GetModifier | string | Modifier of the get accessor for the field |
| SetModifier | string | Modifier of the set accessor for the field |
| Behavior | string | The behavior of the field (e.g. abstract, virtual) |
| Order | int | The order of the field within its entity |
| Size | int? | The size of the field |
| Required | bool | Whether the field is required or not |
| Reference | Entity | The entity that this field refers to |
| Entity | Entity | A navigation property to the parent entity |
| IsKey | bool | Indicates whether the field is part of the primary key |
| IsIndex | bool | Indicates whether the field is part of an index |
| RelationshipKeys | List of Relationships | A List of entities that are defined as relations. |
| IsForeignEntityKeyOf | List of Relationships | List of relationships to the field that is the foreign key |

Table 4.6.: The fields of the Field entity

The Package entity

The Package entity represents a software package that can be used by a component. This could either be a Nuget package in the case of .NET projects, or for example npm packages for web projects.

| Name | DataType | Description |
|-----------|-----------|---------------------------------------|
| Id | Guid | Unique identifier of the package |
| Name | string | Name of the package |
| Version | string | Version of the package used |
| Component | Component | Component associated with the package |

Table 4.7.: The fields of the Package entity

The Relationship entity

The Relationship entity represents a relationship between two entities in the App's data model. The Relationship entity has proper cardinality support. Relationships are bidirectional and can be navigated from either entity.

| Name | DataType | Description |
|----------------------|----------|--|
| Id | Guid | Unique identifier of the relationship |
| Key | Field | The key field of the relationship |
| Entity | Entity | Navigation property to the parent Entity |
| Cardinality | string | The cardinality of the relationship |
| WithForeignKeyKey | Field | The foreign key field of the relationship, pointing to a Field entity. |
| WithForeignKeyEntity | Entity | The entity associated with the foreign key field |
| WithCardinality | string | The cardinality of the relationship with the foreign entity |
| Required | bool | indicates whether the relationship is required or not |

Table 4.8.: The fields of the Relationship entity

4.2. Designin and generating a generated artifact

4.2.1. The model

4.3. Research Design Decision

In accordance to chapter 3.1, the following design decisions have been made to be able to analyze the stability and the evolvability of both of the artifacts.

4.3.1. Fulfilling Research Requirement 1

The following Data entities will be created as part of the initial versions of both artifacts. A full description of the data entities and their relations towards each other can be reviewed in chapter 4.1.4 The meta-model. A description of all attributes are included. **TODO:toevoegen dat de entity, task entiteiten een relaties moet krijgen met component entitiet zodat plaatsen van entiteiten in componenten niet meer in designtime moet.**

5. Evaluation results

This Chapter focuses on the comparison of CA and NS and explores the convergence between the two architectural design approaches. We will start by comparing the principles of CA with the theories of NS and analyze how they converge in their approach and the effect on the software design. In section 5.2, we will compare the design elements of the two architectural approaches. We will highlight the similarities and differences in their implementation, in order to determine the further convergence of the two discussed architectural design approaches.

To conduct this comparison, we used a combination of artifacts and a literature study. We analyzed real-world examples of software artifacts that were designed using CA, and reviewed the relevant literature to gain a comprehensive understanding of both approaches.

Throughout this evaluation chapter, we will explore the strengths and weaknesses of each approach, as well as the potential benefits of their convergence. By examining the principles and design elements of CA and NS, we hope to provide a clear understanding of the effects of using the different approaches in conjunction with each other.

5.1. Converging principles

In this section, we will apply a systematic cross-referencing approach to assess the level of convergence between each of the SOLID principles of CA and the NS theories. Along with a brief explanation, the level of convergence is denoted as followed:

| | | |
|----------------------|-----------|---|
| Fully converges | ++ | This indicates a high degree of alignment between the respective SOLID principle and NS theorem. The application of either principle or theorem results in a similar impact on the software design. |
| Supports convergence | + | In this case, the SOLID principle assists in implementing the NS theorem through specific design choices. However, it is essential to note that applying the principle does not inherently ensure adherence to the corresponding theorem. |
| No convergence | - | This denotation signifies a lack of alignment between the SOLID principle and the corresponding theorem. |

5.1.1.1. Converging the Single Responsibility Principle

| | | |
|-----|-----------|--|
| SoC | ++ | SRP and SoC share a common objective: facilitating evolvable software systems through the promotion of modularity, low coupling, and high cohesion. While there may be some differences in granularity when applying both principles according to the original definition of SOC, the more stringent definition of Separation of Concerns, offered by the NS Theorems ?? minimizes these differences. As a result, the two principles can be regarded as practically interchangeable. In conclusion, SRP and SOC exhibit full convergence, as they both emphasize encapsulating 'responsibilities' or 'concerns' within modular components of a software system. |
| DvT | + | While not immediately apparent, SRP offers supports for the DvT theorem. While SRP emphasizes limiting the responsibility of each module, it does not explicitly require handling changes in data structures. However, following glssrp can still indirectly contribute to achieving DvT by promoting the Law of Demeter ¹ , which encourages modules to interact with each other only through well-defined interfaces. This approach can minimize the impact of data structure changes, although it does not guarantee full convergence with DvT. |
| AvT | + | Although not that apparent, SRP supports the DvT theorem. While SRP emphasizes limiting the responsibility of each module, it does not explicitly require handling changes in data structures. However, following glssrp can still indirectly contribute to achieving DvT by promoting the Law of Demeter ² , which encourages modules to interact with each other only through well-defined interfaces. This approach can minimize the impact of data structure changes, although it does not guarantee full convergence with DvT. |
| SoS | - | The convergence between SRP and the SoS theorem is not as direct as with other theorems. SRP focuses on assigning a single responsibility to each module but does not explicitly address state management. Nevertheless, by following SRP, developers can create modules that manage their state, which indirectly contributes to SoS. |

Table 5.1.: Converge SRP with NS

5.1.2. Converging the Open/Closed Principle

| | | |
|-----|-----------|---|
| SoC | ++ | The OCP converges with the SoC theorem. OCP states that software implementations should be open for extension but closed for modification. When applying OCP correctly, modifications are separated from the original implementations. For example by creating a new implementation of an interface or a base class. Conversely, adhering to SoC does not guarantee the fulfillment of OCP, as SoC focuses on modularization and encapsulation, rather than the extensibility of modules. |
| DvT | + | The OCP supports the DvT theorem. While DvT aims to handle changes in data structures without impacting the system, OCP focuses on the extensibility of software entities. OCP does not explicitly address data versioning, and thus does not guarantee full convergence with DvT. However, by designing modules that follow OCP, developers can create components that are more adaptable to changes in data structures. |
| AvT | ++ | The OCP converges with the AvT theorem. Both principles emphasize the importance of allowing changes or extensions to actions or operations without modifying existing implementations. By adhering to OCP, developers can create modules that can be extended to accommodate new actions or changes in existing ones, effectively achieving AvT. |
| SoS | - | The OCP has an indirect relationship with the Separation of States (SoSt) theorem. However, not on a level where we can speak of convergence. SoS emphasizes isolating different states within a system. Adhering to OCP alone does not guarantee full separation of states. |

Table 5.2.: Converge OCP with NS

5.1.3. Converging the Liskov Substitution Principle

| | | |
|-----|-----------|--|
| SoC | ++ | Adhering to LSP in the software design leads to a more modular design and separation of specific concerns. Therefore we state that LSP converges with SoC. LSP states that objects of a derived class should be able to replace objects of the base class without affecting the correctness of the program. This can only be achieved by a strict separation of concerns in combination with Action version Transparent implementations of the signature. |
| DvT | - | LSP has a limited alignment with the DvT theorem. While LSP focuses on the substitutability of objects in class hierarchies, DvT aims to handle changes in data structures without impacting the system. By following LSP, developers can ensure that derived classes can be substituted for their base classes, which may help reduce the impact of data structure changes on the system. However, LSP does not explicitly address data versioning and thus does not guarantee full convergence with DvT. |
| AvT | + | The LSP supports the AvT theorem. Both principles emphasize the importance of allowing the extensibility of the system, without negatively impacting the desired requirements. By adhering to LSP, developers can create class hierarchies that can be easily extended to accommodate new actions or changes in existing ones, which may contribute to achieving AvT. However, adhering to LSP alone may not guarantee full convergence with AvT. |
| SoS | - | By designing class hierarchies according to LSP, developers can create components that are less prone to side effects caused by shared states. However, the alignment between LSP and SoS is very weak, and adhering to LSP alone may not guarantee full separation of states. |

Table 5.3.: Converge LSP with NS

5.1.4. Converging the Interface Segregation Principle

| | | |
|-----|-----------|---|
| SoC | ++ | The ISP converges with the SoC theorem, as both principles emphasize the importance of modularity and the separation of concerns. ISP states that clients should not be forced to depend on implementation they do not use, promoting the creation of smaller, focused interfaces. By adhering to SoC and designing target interfaces, inherently support SoC, leading to more evolvable software systems. |
| DvT | + | The ISP has an indirect relationship with the DvT theorem. When adhering to the ISP, a developer can create a specific interface supporting a specific version of data entities. Although this approach can help minimize the impact of data structure changes on the system, it does not guarantee full DvT information system. |
| AvT | + | The ISP supports the AvT theorem. Both principles emphasize the importance of separating actions within a system. ISP promotes the creation of interfaces for each (version of an) action, which aligns with the core concept of AvT. This alignment allows for a more manageable system, where changes in one action do not lead to ripple effects throughout the entire system. Although the adherence to ISP does not guarantee full compliance with the AvT |
| SoS | - | There is no alignment between ISP and SoS. Mostly because ISP focuses on the separation of interfaces and abstract classes, while SoS emphasizes isolating different states within a system. This is an implementation concern. By no means the application of ISP could lead to a separation of state. |

Table 5.4.: Converge ISP with NS

5.1.5. Converging the Interface Segregation Principle

| | | |
|-----|-----------|---|
| SoC | ++ | This principle converges with the SoC theorem. DIP states that high-level modules should not depend on low-level modules. When unavoidable, high-level modules should depend on abstractions of low-level modules and abstractions should not depend on details. By adhering to DIP correctly, developers can create modular and decoupled software systems, which aligns to break down a system into evolvable components. This convergence enables developers to create maintainable, scalable, and adaptable software systems that effectively manage complexity. Dependency Injection is a valuable (but not the only or mandatory) aspect of DIP. We have observed that the claim that the technique of Dependency Injection solves coupling between classes in an application is dangerous and in some cases wrong (Mannaert et al., 2016, p. 215). Nevertheless, this technique, when applied correctly (see 2.3.1), the artifact have pointed out that it has been a great asset in creating evolvable software, especially in the aspect of SoC. |
| DvT | + | Adhering to the DIP can indirectly support the DvT theorem. By adhering to the DIP, developers can promote implementations that encourage modules to interact with each other only through well-defined interfaces or abstractions. This approach can help minimize the impact of data structure changes on the system but does not guarantee full compliance with DvT. |
| AvT | + | The DIP can support the AvT theorem. Both principles emphasize the importance of isolating actions or operations within a system. By adhering to DIP, developers can create modular components that interact through abstractions, which may contribute to achieving AvT. However, the alignment between DIP and AvT less strong than with SoC, and adhering to DIP alone will not guarantee a system that entirely complies to AvT. |
| SoS | - | There is a very weak alignment between DIP and SoS. Although Developers can create components that are less prone to side effects caused by a shared state, this can hardly be contributed to the DIP. Therefore it is stated that there is no convergence between the two principles. |

Table 5.5.: Converge DIP with NS

5.2. Converging elements

In this section, we will apply a systematic cross-referencing approach to assess the level of convergence between each of the elements of both CA and NS. Along with a brief explanation, the level of convergence is denoted as followed:

| | | |
|--------------------|-----------|--|
| Strong convergence | ++ | Both elements have a high level of similarity or are closely related in terms of their purpose, structure, or functionality. |
| Some convergence | + | Both elements have some similarities or share certain aspects in their purpose, structure, or functionality, but they are not identical or directly interchangeable. |
| No convergence | - | The elements are not related or have no significant similarities in terms of their purpose, structure, or functionality. |

5.2.1. Converging the Entity element

| | | |
|-----------|----------|--|
| Data | + | Both elements represent data objects that are part of the ontology or data schema of the application, and typically include attributes and relationship information. While both can contain a full set of attributes and relationships, the Data entity of NS may also include a specific set of information that is required for a single task or use case. |
| Task | - | The Entity is not convergent with the Task element of NS. However, the Tasks element might operate on entities to perform business logic. |
| Flow | - | The Entity and Flow are not convergent, as the Flow element represents the control between Tasks in NS, while the Entity in CA represents domain objects. |
| Connector | - | The Entity element and Connector element are not convergent, as the Connector element in NS is involved in between components, while the Entity in CA represents domain objects. |
| Trigger | - | The Entity element and Trigger element are not convergent, as the Trigger element in NS is about event-based execution of Tasks, while the Entity in CA represents domain objects. |

Table 5.6.: The convergence of the Entity element

5.2.2. Converging the Interactor element

| | | |
|-----------|----|--|
| Data | — | The Interactor and Data elements are not convergent. However, Interactors might use Data elements as input and output during the execution of business logic. |
| Task | ++ | The Task element in NS is very closely related to the Interactor element of CA, as both encapsulate the execution of business logic. |
| Flow | + | The Interactor and Flow elements are partly convergent, as the Interactor orchestrates the flow of execution for a use case, which can involve multiple Tasks in NS. |
| Connector | — | The Interactor and Connector elements are not convergent. However, the Interactor might rely on connectors to communicate with other components in the system. |
| Trigger | — | The Interactor and Trigger elements are not convergent. However, the Interactors can be triggered by events or external requests, similar to NS Trigger elements. |

Table 5.7.: The convergence of the Interactor element

5.2.3. Converging the RequestModel element

| | | |
|-----------|---|---|
| Data | + | Both elements represent data objects that are part of the ontology or data schema of the application, and typically include attributes and relationship information. While they may contain a specific set of information as input for a Task or use case, both elements can also contain a full set of attributes and relationships. However, unlike the Data entity in NS, which may include only a subset of information necessary for a specific Task or use case, it may also include the full set of information required for Tasks other purposes. |
| Task | — | The RequestModel is not convergent with the Task element of NS. However, the Tasks element might operate on Request-Models as input parameters to perform business logic. |
| Flow | — | The RequestModel and Flow are not convergent, as the Flow element represents the control between Tasks in NS, while the RequestModel in CA represents (parts of) domain objects. |
| Connector | — | The RequestModel element and Connector element are not convergent, as the Connector element in NS is involved in the communication between components, whilst the Request-Model in CA represents (parts of) domain objects. |
| Trigger | — | The RequestModel element and Trigger element are not convergent, as the Trigger element in NS is about event-based execution of Tasks, while the RequestModel in CA represents (parts of) domain objects. |

Table 5.8.: The convergence of the RequestModel element

5.2.4. Converging the ResponseModel element

| | | |
|-----------|---|--|
| Data | + | Both elements represent data objects that are part of the ontology or data schema of the application, and typically include attributes and relationship information. While they may contain a specific set of information as output for a Task or use case, both elements can also contain a full set of attributes and relationships. However, unlike the Data entity in NS, which may include only a subset of information necessary for a specific Task or use case, it may also include the full set of information required for Tasks other purposes. |
| Task | — | The ResponseModel is not convergent with the Task element of NS. However, the Tasks element might operate on Request-Models as input parameters to perform business logic. |
| Flow | — | The ResponseModel and Flow are not convergent, as the Flow element represents the control between Tasks in NS, while the ResponseModel in CA represents (parts of) domain objects. |
| Connector | — | The ResponseModel element and Connector element are not convergent, as the Connector element in NS is involved in communication between components, whilst the ResponseModel in CA represents (parts of) domain objects. |
| Trigger | — | The ResponseModel element and Trigger element are not convergent, as the Trigger element in NS is about event-based execution of Tasks, while the ResponseModel in CA represents (parts of) domain objects. |

Table 5.9.: The convergence of the ResponseModel element

5.2.5. Converging the ViewModel element

| | | |
|-----------|---|---|
| Data | + | The ViewModel and Data element of NS is convergent to some degree. Both are involved in defining the structure of data used in the system. This could include required information about attributes and relationships. Additionally, the View-Model could also represent information that is specifically intended for the representation of behavior for a user interface. |
| Task | - | The ViewModel is not convergent with the Task element of NS. The ViewModel is focused on presenting information, whilst the Task element is concerned with executing business logic. |
| Flow | - | The ViewModel and Flow are not convergent, as the Flow element represents the control between Tasks in NS and is not directly involved in the presentation of information. |
| Connector | - | The ViewModel element and Connector element are not convergent, as the Connector element in NS is involved in the communication between components, whilst the ViewModel in CA is involved in the presentation of information. |
| Trigger | - | The ViewModel element and Trigger element are not convergent, as the Trigger element in NS is responsible for the event-based execution of Tasks, whilst the ViewModel in CA is involved in the presentation of information. |

Table 5.10.: The convergence of the ResponseModel element

5.2.6. Converging the Controller element

| | | |
|-----------|---|--|
| Data | — | The Controllers and Data elements are not directly convergent, as the Controller element is focused on handling input/output from external systems, while Data elements represent domain objects. |
| Task | — | The Controllers and Task elements are not convergent. However, controllers might initiate Task elements when handling incoming requests. |
| Flow | — | The Controllers and Flow elements are not convergent, as the Controller element is focused on handling input/output from external systems, whilst the Flow element is concerned with the orchestration of Tasks. |
| Connector | + | The Controller and Connector element are convergent to some degree. Both elements are involved in communication between components. The use of the Controller is a bit more strict it strictly defines communication from external parts of the systems, involving specific Interacto. |
| Trigger | + | The Controller and the Trigger element of NS are convergent to some degree as they both can initiate actions based on external events or requests. A Controller is primarily involved in receiving events or requests from external sources, followed by the invocation of the appropriate interactor. |

Table 5.11.: The convergence of the Controller element

5.2.7. Converging the Gateway element

| | | |
|-----------|----|--|
| Data | — | The Gateway and Data element are not convergent. Nevertheless, the Gateway element might interact with data entities when providing access to external resources or systems. |
| Task | — | The Gateway and Task element are not convergent. Nevertheless, the Task elements might use gateways when interacting with external resources or systems during the execution of business logic. |
| Flow | — | The Gateway and Flow element are not directly related, as the Flow element represents the orchestration between Tasks in NS, whilst the Gateway element in CA provide access to external resources or systems. |
| Connector | ++ | The Gateway and Connector element have a strong convergence, as both are involved in communication between components and provide interfaces for accessing external resources or systems. |
| Trigger | — | The Gateway and Trigger element are not convergent, as the Trigger in NS is about event-based execution of Tasks, whilst the Gateway in CA provide access to external resources or systems. |

Table 5.12.: The convergence of the Gateway element

5.2.8. Converging the Presenter element

| | | |
|-----------|---|--|
| Data | — | The Presenter and Data element are not convergent. However, Data elements might be transformed into a suitable format for the user inter interface by CA's Presenter element. |
| Task | — | The Presenter and Task elements are not convergent. The Presenter element is focused on transforming output data to the user interface, while the Task element of NS executes business logic. |
| Flow | — | The Presenter and Flow element are not convergent. The Flow element of NS represents the orchestration between Tasks, while the Presenter element in CA is responsible for transforming output data to the user interface. |
| Connector | — | The Presenter and Connector elements are not convergent. Although the Presenter element of CA might rely on Connector elements of NS to communicate with other components in the system. |
| Trigger | — | The Presenter and Trigger elements are not convergent, as the Triggers element in NS is about event-based execution of Tasks, while presenters in CA are responsible for transforming output data on behalf of the user interface. |

Table 5.13.: The convergence of the Presenter element

5.2.9. Converging the Boundary element

| | | |
|-----------|----|---|
| Data | — | The Boundary and Data elements are not convergent, as the Boundary element is focused on separating concerns between components, while the Data element of NS represents a domain object. |
| Task | — | The Boundary and Flow Task element are not convergent, However, the Boundary element can be used in a Task element to ensure a clear separation of concerns between different modules. |
| Flow | + | The Boundary and Flow element are not convergent, However, the Boundary element can be used in a Flow element to ensure a clear separation of concerns between different modules. |
| Connector | ++ | The Boundary and Connector elements have a strong convergence, as both are involved in communication between components and help ensure loose coupling between these components. |
| Trigger | — | The Boundary and Trigger element are not convergent, as the Trigger in NS is about event-based execution of Tasks, whilst the Boundary in CA ensures the separation of concerns between components of the system. |

Table 5.14.: The convergence of the Boundary element

6. Conclusions

1. Literature Review

- Ca offers structure, principles and guidelines on how to build something. On top of that, NST also offers guidelines in order to apply actual changes. glsca has a strong emphasis on testability of code. Coupling is an important aspect on this.
- SRP differs fundamentally from SoC in definition, although in the artifact not that much (further explain). Komt vooral door verschillende definities in granulariteit.

2. Architectural Desing

-

3. Artifact Development

-

3.1. The Code Generator and Clean Architecture Expander

-

3.2. Expanded Clean Architecture artifact

-

4. Convergence Analysis:

-

- 4.1. An analysis per principle of CA, compared with each of the principles of NS, indicating each level of convergence per principle
- 4.2. An analysis per element of CA, compared with each of the elements of NS, indicating each level of convergence per principle

7. Reflections

In this Chapter, I will discuss my experiences and learnings from working with NS and CA during my research. I will use the "5-ways" framework to structure my reflections, providing insights into my thinking, managing, modeling, working, and supporting aspects of the developing approaches that were the topic of my research. Through this chapter, I hope to demonstrate the value of NS and its contribution to my knowledge in software engineering.

Way of Thinking

One of the aspects of NS is the characteristics of code generation. In my Job as a Domain Architect, I was involved in the development of software products based on the Model Driven Development (MDD) paradigm. My early experiences made me very sceptical about this approach. The theory of NS taught me to better understand the reasoning and characteristics of code generation, on which I then realized that my skepticism was more about the process caused as an effect on the implementation of the MDD. The knowledge of NS helped me to gain a more clear vision. This currently helps me push the roadmap on the MDD framework in the right direction.

Way of Managing

Way of Modeling

I considered multiple modeling languages in order to explain the implementation concepts of the artifact. One of which was the idea of using Archimate, but decided otherwise as I wanted to use a language that could be interpreted by a broader audience. I even considered just using *boxes and arrows*, but eventually decided on the UML2 standard as it is an official modeling language.

Way of Working

The topic of NS re-ignited my passion for software engineering and the aspects of designing and creating, -what I would previously mention as maintainable and qualitative. NS Taught me that it was in fact about software evolvability and stability. And on top of that, NS contributed greatly to my knowledge in doing so.

I very much enjoyed designing and creating the C# artifacts. In hindsight, I enjoyed it so much that I probably put in much more effort than was needed. This was also because I was very curious about the aspects of code generation, the effect of code generation on stable and evolvable artifacts and the characteristics of meta-circularity. I'm confident to say that I could have reached the same conclusions that are described in this Thesis, with a single, manually built Restful C# artifact.

The NS theorems are so nicely and abstractly formulated, that it ascends the domain of software engineering. During the masterclasses, we learned about applications of NS in the areas of Firewalls, Document management systems and Evolvable Business Processes. I experienced also benefits in structuring and maintaining my Thesis document using Visual Studio Code (VSCode) and Latex.

Way of Suporting

At the beginning of my research, I received a thorough introduction to the NS Theories and the Prime Radiant tooling from an employer at NSX. This introduction was extremely helpful in gaining a better understanding of the fundamentals of NS. It also inspired me to consider the code-generation aspects of the methodology, as well as the use of expanders, which are valuable for consistently delivering software artifacts with great precision. One thing and another has led to the decision to create the artifacts as described in this thesis.

For the writing of the Thesis, I decided to use Latex. I quickly discovered that Overleaf was one of the most popular editors. Nevertheless, I continued my search since I did not like the idea of being dependent on online tooling for writing my thesis. Although offline working is possible, doing so is very rudimentary without having the complete experience. At some point, I decided to experiment with my favorite code editor VSCode, and with the help of a latex package manager and some VSCode plugins I was able to create a fully-fledged Latex Editor in VSCode, with all it's benefits. There was even a plugin available that allowed me to use the spellchecker Grammarly while writing and modifying the .tex files.

Using Latex was a real eye-opener, and very relatable to my research as it allowed me to adhere to most of the NS principles while writing and maintaining my Thesis.

References

- D. McIlroy. (1968). NATO SOFTWARE ENGINEERING CONFERENCE 1968.
- De Bruyn, P., Mannaert, H., Verelst, J., & Huysmans, P. (2018). Enabling Normalized Systems in Practice – Exploring a Modeling Approach. *Business & Information Systems Engineering*, 60(1), 55–67. <https://doi.org/10.1007/s12599-017-0510-4>
- Dijkstra, E. (1968). Letters to the editor: Go to statement considered harmful. *Communications of the ACM*, 11(3), 147–148. <https://doi.org/10.1145/362929.362947>
- Haerens, G. (2021). On the Evolvability of the TCP-IP Based Network Firewall Rule Base.
- Hevner, A. R., March, S. T., Park, J., & Ram, S. (2004). Design Science in Information Systems Research.
- Huysmans, P., & Verelst, J. (2013). Towards an Engineering-Based Research Approach for Enterprise Architecture: Lessons Learned from Normalized Systems Theory. In *Progress in Pattern Recognition, Image Analysis, Computer Vision, and Applications* (pp. 58–72, Vol. 8827). Springer International Publishing. https://doi.org/10.1007/978-3-642-38490-5_5
- Lehman, M. (1980). Programs, life cycles, and laws of software evolution. *Proceedings of the IEEE*, 68(9), 1060–1076. <https://doi.org/10.1109/PROC.1980.11805>
- Mannaert, H., & Verelst, J. (2009). *Normalized systems re-creating information technology based on laws for software evolvability*. Koppa. OCLC: 1073467550.
- Mannaert, H., Verelst, J., & De Bruyn, P. (2016). *Normalized systems theory: From foundations for evolvable software toward a general theory for evolvable design*. nsi-Press powered bei Koppa.
- Meyer, B. (1988). *Object-oriented software construction* (1st ed). Prentice Hall PTR.
- Nuffel, D. V. (2011). Towards Designing Modular and Evolvable Business Processes, 424.
- Oorts, G., Huysmans, P., De Bruyn, P., Mannaert, H., Verelst, J., & Oost, A. (2014). Building Evolvable Software Using Normalized Systems Theory: A Case Study. *2014 47th Hawaii International Conference on System Sciences*, 4760–4769. <https://doi.org/10.1109/HICSS.2014.585>
- Parnas, DL. (1972). On the criteria to be used in decomposing systems into modules. *Communications of the ACM*, 15(12), 1053–1058. <https://doi.org/10.1145/361598.361623>
- Robert C. Martin. (2018). *Clean architecture: A craftsman’s guide to software structure and design*. Prentice Hall. OCLC: on1004983973.

- Wieringa, R. J. (2014). *Design Science Methodology for Information Systems and Software Engineering*. Springer Berlin Heidelberg. <https://doi.org/10.1007/978-3-662-43839-8>
- Wikipedia. (2023, March 25). Douglas McIlroy. In *Wikipedia*. Retrieved April 21, 2023, from https://en.wikipedia.org/w/index.php?title=Douglas_McIlroy&oldid=1146587956
Page Version ID: 1146587956.

References to Code Samples

- Koks, G. C. (2023a). *AbstractExpander*. GitHub. <https://github.com/LiquidVisions/LiquidVisions.PanthaRhei/blob/9687c96eb368d96201d4baa66b1b0536cb90c12c/Generator/src/PanthaRhei.Generator.Domain/Interactors/Generators/Expanders/AbstractExpander.cs>
- Koks, G. C. (2023b). *AbstractExpanderDependencyManagerInteractor*. <https://github.com/LiquidVisions/LiquidVisions.PanthaRhei/blob/9687c96eb368d96201d4baa66b1b0536cb90c12c/Generator/src/PanthaRhei.Generator.Domain/Interactors/Generators/Expanders/AbstractExpanderDependencyManagerInteractor.cs>
- Koks, G. C. (2023c). *CodeGeneratorInteractor*. GitHub. <https://github.com/LiquidVisions/LiquidVisions.PanthaRhei/blob/9687c96eb368d96201d4baa66b1b0536cb90c12c/Generator/src/PanthaRhei.Generator.Application/Interactors/Generators/CodeGeneratorInteractor.cs>
- Koks, G. C. (2023d). *The Generator Console*. GitHub. <https://github.com/LiquidVisions/LiquidVisions.PanthaRhei/blob/9687c96eb368d96201d4baa66b1b0536cb90c12c/Generator/src/PanthaRhei.Generator.Presentation.Cli/Program.cs>
- Koks, G. C. (2023e). *IExecutionInteractor*. GitHub. <https://github.com/LiquidVisions/LiquidVisions.PanthaRhei/blob/9687c96eb368d96201d4baa66b1b0536cb90c12c/Generator/src/PanthaRhei.Generator.Domain/Interactors/Generators/IExecutionInteractor.cs>
- Koks, G. C. (2023f). *IExpanderHandlerInteractor*. GitHub. <https://github.com/LiquidVisions/LiquidVisions.PanthaRhei/blob/9687c96eb368d96201d4baa66b1b0536cb90c12c/Generator/src/PanthaRhei.Generator.Domain/Interactors/Generators/IExpanderHandlerInteractor.cs>
- Koks, G. C. (2023g). *IExpanderInteractor*. GitHub. <https://github.com/LiquidVisions/LiquidVisions.PanthaRhei/blob/9687c96eb368d96201d4baa66b1b0536cb90c12c/Generator/src/PanthaRhei.Generator.Domain/Interactors/Generators/Expanders/IExpanderInteractor.cs>
- Koks, G. C. (2023h). *IHarvesterInteractor*. <https://github.com/LiquidVisions/LiquidVisions.PanthaRhei/blob/9687c96eb368d96201d4baa66b1b0536cb90c12c/Generator/src/PanthaRhei.Generator.Domain/Interactors/Generators/Harvesters/IHarvesterInteractor.cs>
- Koks, G. C. (2023i). *InstallDotNetTemplateInteractor*. <https://github.com/LiquidVisions/LiquidVisions.PanthaRhei/blob/9687c96eb368d96201d4baa66b1b0536cb90c12c/Generator/src/PanthaRhei.Generator.Domain/Interactors/Generators/Preprocessors/InstallDotNetTemplateInteractor.cs>

- Koks, G. C. (2023j). *IRejuvenatorInteractor*. <https://github.com/LiquidVisions/LiquidVisions.PanthaRhei/blob/9687c96eb368d96201d4baa66b1b0536cb90c12c/Generator/src/PanthaRhei.Generator.Domain/Interactors/Generators/Rejuvenator/IRejuvenatorInteractor.cs>
- Koks, G. C. (2023k). *PanthaRheiGeneratorDomain*. <https://github.com/LiquidVisions/LiquidVisions.PanthaRhei/tree/master-thesis-artifact/Generator/src/PanthaRhei.Generator.Domain>
- Koks, G. C. (2023l). *PostProcessorInteractor*. GitHub. <https://github.com/LiquidVisions/LiquidVisions.PanthaRhei/blob/9687c96eb368d96201d4baa66b1b0536cb90c12c/Generator/src/PanthaRhei.Generator.Domain/Interactors/Generators/PostProcessors/PostProcessorInteractor.cs>
- Koks, G. C. (2023m). *PreProcessorInteractor*. GitHub. <https://github.com/LiquidVisions/LiquidVisions.PanthaRhei/blob/9687c96eb368d96201d4baa66b1b0536cb90c12c/Generator/src/PanthaRhei.Generator.Domain/Interactors/Generators/Preprocessors/PreProcessorInteractor.cs>
- Koks, G. C. (2023n). *RegionHarvesterInteractor*. GitHub. <https://github.com/LiquidVisions/LiquidVisions.PanthaRhei/blob/9687c96eb368d96201d4baa66b1b0536cb90c12c/Generator/src/PanthaRhei.Generator.Domain/Interactors/Generators/Harvesters/RegionHarvesterInteractor.cs>
- Koks, G. C. (2023o). *RegionRejuvenatorInteractor*. GitHub. <https://github.com/LiquidVisions/LiquidVisions.PanthaRhei/blob/9687c96eb368d96201d4baa66b1b0536cb90c12c/Generator/src/PanthaRhei.Generator.Domain/Interactors/Generators/Rejuvenator/RegionRejuvenatorInteractor.cs>
- Koks, G. C. (2023p). *UnInstallDotNetTemplateInteractor*. <https://github.com/LiquidVisions/LiquidVisions.PanthaRhei/blob/9687c96eb368d96201d4baa66b1b0536cb90c12c/Generator/src/PanthaRhei.Generator.Domain/Interactors/Generators/PostProcessors/UnInstallDotNetTemplateInteractor.cs>

List of Figures

| | |
|---|----|
| 1.1. The hypothesis | 2 |
| 1.2. Engineering cycle | 4 |
| 1.3. Design Science Framework for IS Research | 5 |
| 2.1. Separation of component libraries | 12 |
| 2.2. Flow of control | 15 |
| 4.1. Plugin Archticture | 22 |
| 4.2. Plugin Archticture | 23 |
| B.1. Entity Relationship Diagram of the MetaModel | 60 |
| C.1. UML Notation used | 61 |
| C.2. Generic architecture | 62 |

List of Tables

| | |
|---|----|
| 2.1. The Design Theorems of Normalized Systems. | 8 |
| 2.2. The Elements proposed by Normalized Systems Theory | 9 |
| 3.1. Naming convention components | 18 |
| 3.2. Naming convention of recurring elements | 19 |
| 4.1. The fields of the App entity | 24 |
| 4.2. The fields of the Component entity | 25 |
| 4.3. The fields of the ConnectionString entity | 25 |
| 4.4. The fields of the Entity entity | 26 |
| 4.5. The fields of the Expander entity | 26 |
| 4.6. The fields of the Field entity | 27 |
| 4.7. The fields of the Package entity | 27 |
| 4.8. The fields of the Relationship entity | 28 |
| 5.1. Converge SRP with NS | 30 |
| 5.2. Converge OCP with NS | 31 |
| 5.3. Converge LSP with NS | 32 |
| 5.4. Converge ISP with NS | 33 |
| 5.5. Converge DIP with NS | 34 |
| 5.6. The convergence of the Entity element | 35 |
| 5.7. The convergence of the Interactor element | 36 |
| 5.8. The convergence of the RequestModel element | 37 |
| 5.9. The convergence of the ResponseModel element | 38 |
| 5.10. The convergence of the ResponseModel element | 39 |
| 5.11. The convergence of the Controller element | 40 |
| 5.12. The convergence of the Gateway element | 41 |
| 5.13. The convergence of the Presenter element | 42 |
| 5.14. The convergence of the Boundary element | 43 |
| A.1. The <i>flux</i> command line parameters | 58 |
| A.2. The available <i>Generation modes</i> | 58 |
| D.1. The Component Cohesion Principles | 63 |

Glossary

Combinatorial Effect Instabilities, an increasing number of changes (ripples) in the source code, required to adhere to new requirements..

Ripple Effect The total number of changes required to adhere to new requirements..

Acronyms

AvT Action Version Transparency.

CA Clean Architecture.

CCP The Common Closure Principle.

CRP The Common Reuse Principle.

DIP Dependency Inversion Principle.

DLL Dynamic Link Library.

DvT Data Version Transparency.

ERD Entity Relation Diagram.

ISP Interface Segregation Principle.

LSP Liskov Substitution Principle.

MDD Model Driven Development.

NS Normalized Systems.

OCP Open/Closed Principle.

REP The Resuse/Release Equivalence Principle.

SoC Separation Of Concerns.

SOLID Single Responsibility Principle, Open/Closed Principle, Liskov Substitution Principle, Interface Segregation Principle, Dependency Inversion Principle.

SoS Separation of State.

SRP Single Responsibility Principle.

VSCode Visual Studio Code.

[title=Glossary of Terms]

A. Installing & using Pantha Rhei

A.1. Installation instructions

Step 1: Create output folder

Create an output folder so that the applications...

- ...has a location where to find the required expanders.
- ...has a location where the log files are stored.
- ...has a location where the result of the generation processes can be stored.

The location of the output folder is irrelevant.

Step 2: Create the Nuget configuration file

Add a configuration file named *nuget.config* file to the output folder with the the following content:

```
1 <?xml version="1.0" encoding="utf-8"?>
2 <configuration>
3   <packageSources>
4     <clear />
5     <add key="github" value="https://nuget.pkg.github.com/liquidvisions/index.json"
6       />
7   </packageSources>
8   <packageSourceCredentials>
9     <github>
10      <add key="Username" value="" />
11      <add key="ClearTextPassword" value="{email me for a valid access token @
12        gerco.koks@outlook.com}" />
13    </github>
14  </packageSourceCredentials>
15 </configuration>
```

Listing A.1: The content of the Nuget configuration file

This config file is needed for the following step where the Pantha Rhei application is installed. The file contains the information to the private feed where the Pantha Rhei application can be downloaded and installed.

Step 3: Installing Pantha Rhei

Open a console in on the location where the Nuget configuration file is stored. The following command will download the package, and start the installation process which is executed in the background.

```
1 dotnet tool install LiquidVisions.PanthaRhei.Flux -g
```

Listing A.2: The install command

Step 4: Download & Install the Expanders

By clicking on the following link, an archived folder will be presented as a download by your browser. Download the archived folder and extract it on completion. Store the extracted folder, in a subfolder called *Expanders* in the root of the output folder. By doing so, the following folder structure should be available:

```
PanthaRhei.Output
├── Expanders
│   └── .Templates
└── nuget.config
```

The Pantha Rhei application is now ready for use.

Step 5: Setup a SQL database

Currently, Pantha Rhei is working with an MS SQL database for storing the model of the applications. Set up a SQL Database. This can either be a licensed version of SQL Server, the free-to-use SQL Express or an Azure SQL instance. See <https://www.microsoft.com/en/sql-server/sql-server-downloads> for more information. Make sure to have a valid connection string to the SQL server instance that is needed in step A.1 Step 6: Execute the command.

Step 6: Execute the command

Pantha Rhei is used by executing the *flux* command with the parameters as described in table A.1

```
1 flux --root "{folder}"
2     --mode Default
3     --app "{uniqueid}"
4     --db "{connectionstring}"
```

Listing A.3: Example command executing Pantha Rhei

| | |
|---------|--|
| -root | A mandatory parameter that should contain the full path to the output directory A Installing & using Pantha Rhei. |
| -db | A mandatory parameter that contains the connection string to the database. |
| -app | A mandatory parameter indicating the unique identifier of the application that should be generated. |
| -mode | An optional parameter that determines if a handler should be executed. <i>Default</i> is the default fallback mode (see A.2). |
| -reseed | An optional parameter that bypasses the expanding process. The model will be thoroughly cleaned and reseeded based on the entities of the expander artifact. This enables to a certain extent the meta-circularity and enables the expander artifact to generate itself. |

Table A.1.: The *flux* command line parameters

RunModes are available to isolate the execution of the ExpanderHandler. It requires a current implementation shown in listing A.4. The following RunModes are available.

| | |
|---------|--|
| Default | This is the default generation mode that executes all configured handlers of the CleanArchitectureExpander. This will also install the required Visual Studio templates which are needed for scaffolding the Solution and C# Project files. Furthermore, it also executes the Harvest and Rejuvenation handlers. This mode will clean up the entire output folder prior after the Harvesting process is finished prior to the execution of the handlers. |
| Extend | This mode will skip the installation of the Visual Studio templates and the project scaffolding. It will not clean up the output folder but will overwrite any files handled. This mode is often less time-consuming and can be used in scenarios to quickly check the result of a part of the generation process. |
| Deploy | An optional mode that allows for expander handlers to run deployments in isolation. For example, when a developer wants to deploy the output to an Azure App Service. |
| Migrate | An optional mode that allows for expander handlers to run migrations in isolation. For example, this currently updates the database schema by running the Entity Framework Commandline Interface (see https://learn.microsoft.com/en-us/ef/core/cli/dotnet). |

Table A.2.: The available *Generation modes*

```

1 public class ExpandDatabaseContextHandlerInteractor
2     : IExpanderHandlerInteractor<CleanArchitectureExpander>
3 {
4     // ... other code
5     public bool CanExecute =>

```

```

6     parameters
7         .GenerationMode
8         .HasFlag(GenerationModes.Default) ||
9     parameters
10        .GenerationMode
11        .HasFlag(GenerationModes.Extend);
12    // ... other code
13 }

```

Listing A.4: Example on how an expander handler can adhere to the RunMode parameters

B. The Entity Relationship Diagram of the Meta Mode

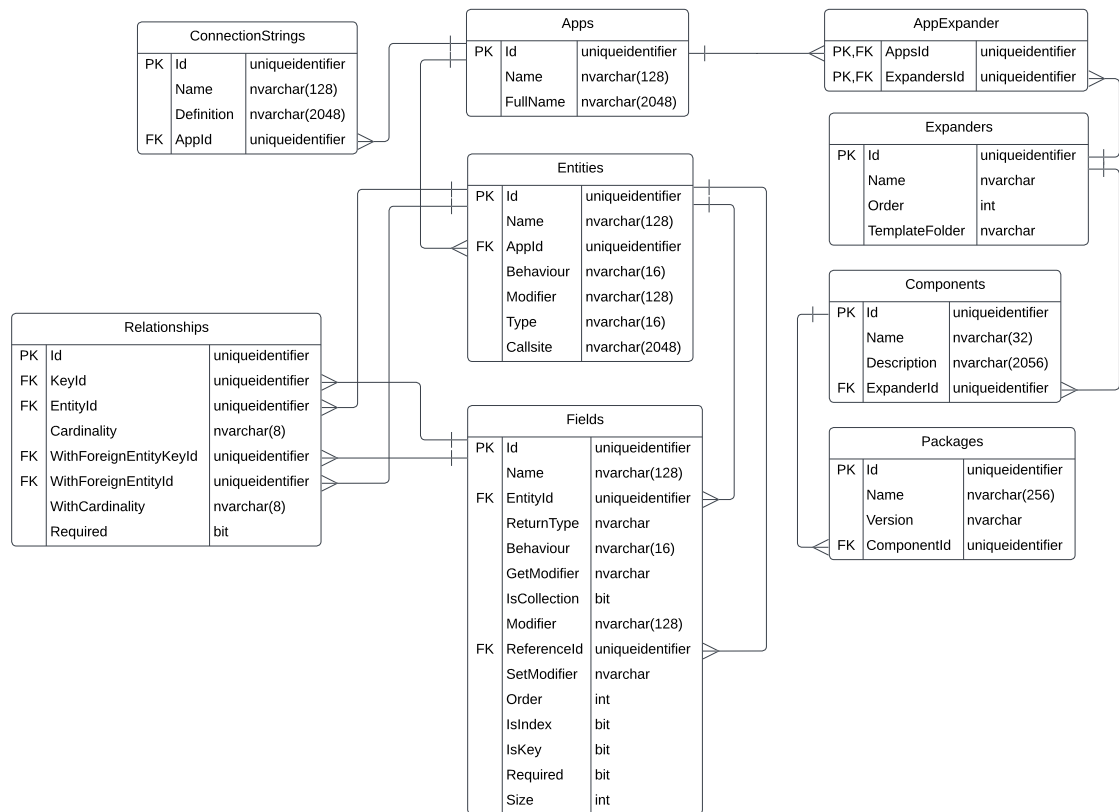


Figure B.1.: Entity Relationship Diagram of the MetaModel

C. Designs

C.1. Legenda

In order to visualize the designs of the artifact, a standard UML notation is used. The designs containing relationships adhere to the following definitions.

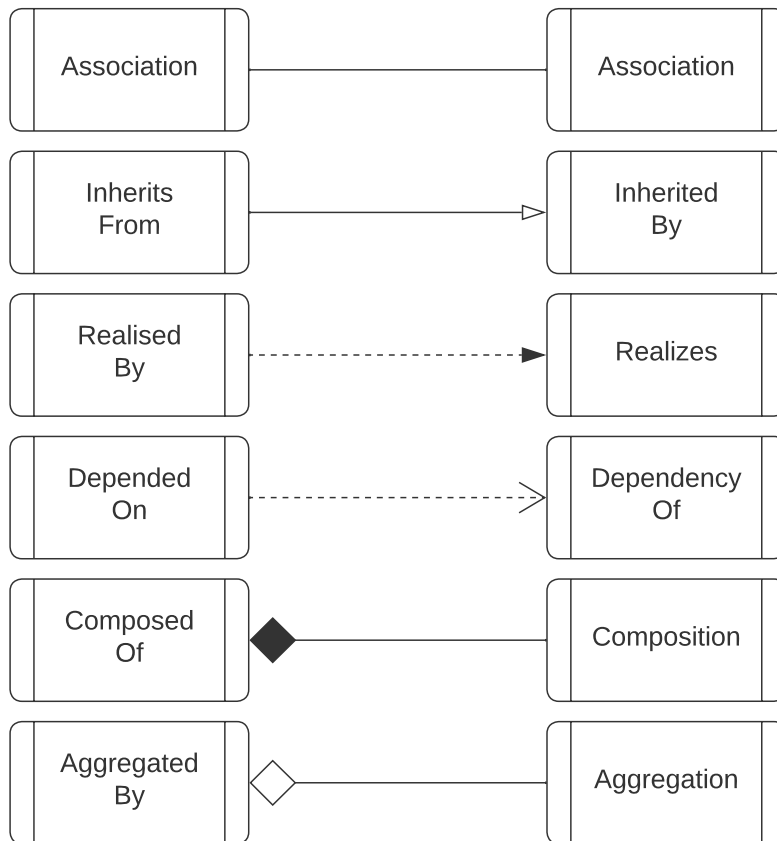


Figure C.1.: UML notation

C.2. Generic design

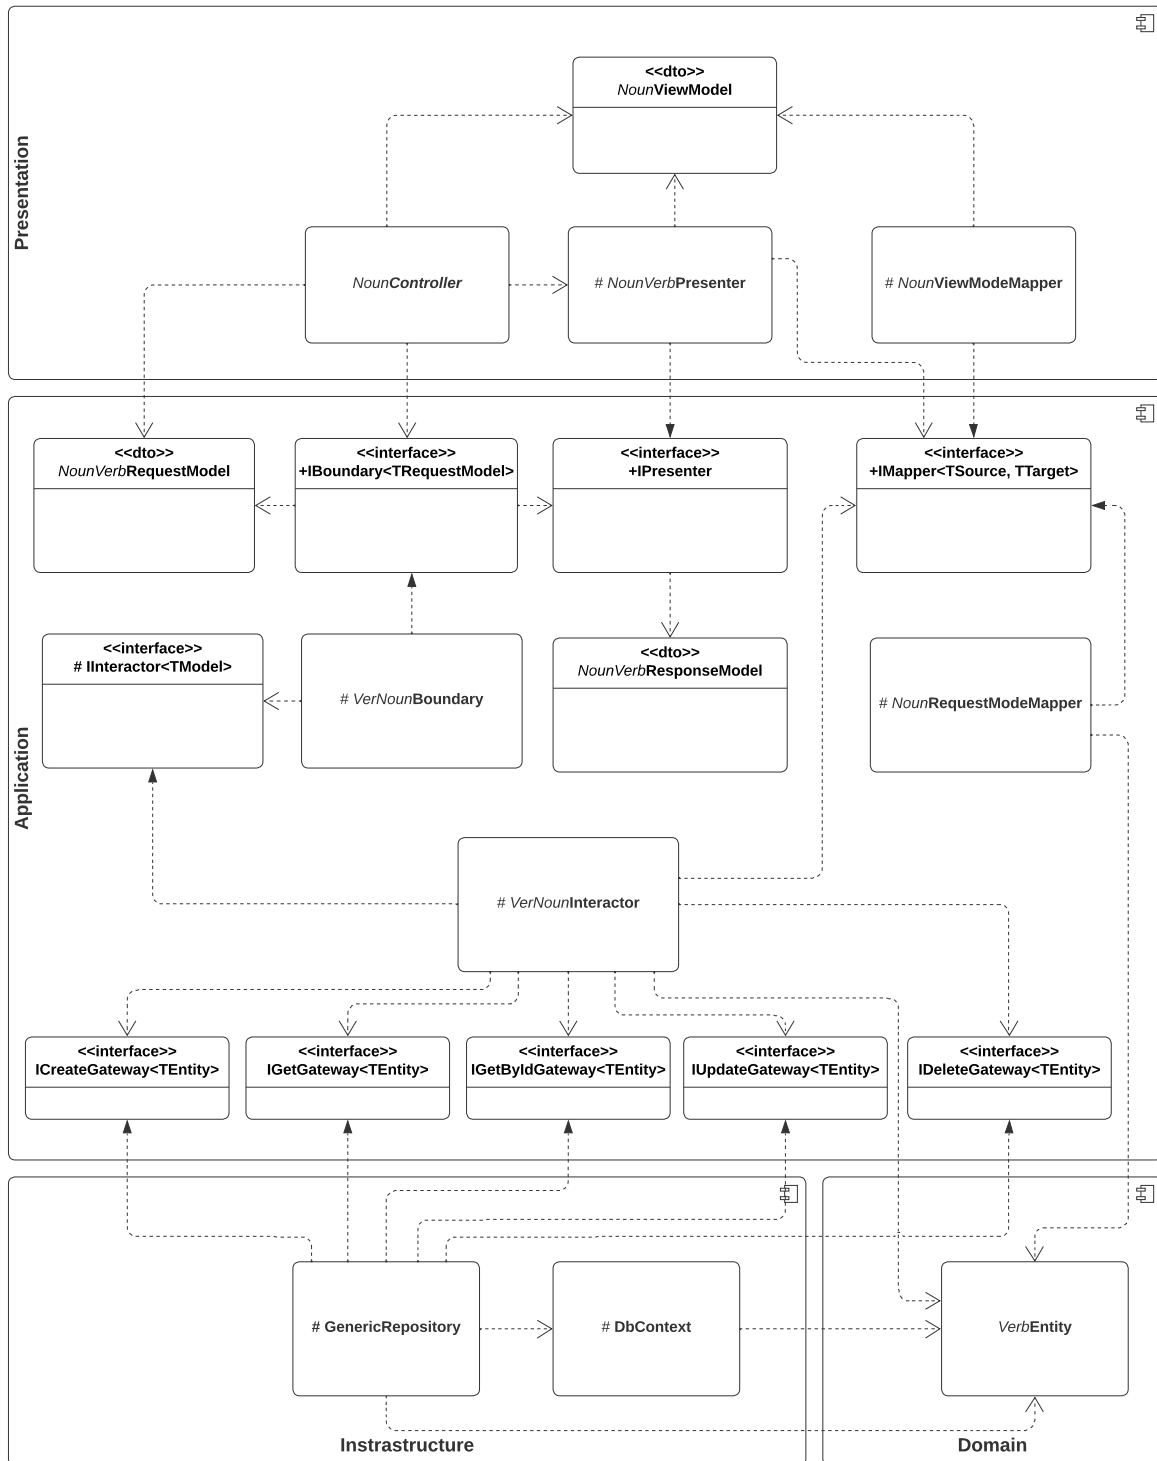


Figure C.2.: The Generic architecture of the artifacts

D. Cohesion

| | |
|--|--|
| The Resuse/Release Equivalence Principle | REP is a concept related to software development that refers to the balance between reusing existing software components and releasing new ones to ensure the efficient use of resources and time (Robert C. Martin, 2018, p. 119). |
| The Common Closure Principle | In the context of Clean Architecture, the CCP states that classes or components that change together should be packaged together. In other words, if a group of classes is likely to be affected by the same kind of change, they should be grouped into the same package or module. This approach enhances the maintainability and modularity of the software (Robert C. Martin, 2018, p. 120). |
| The Common Reuse Principle | CRP states that classes or components that are reused together should be packaged together. It means that if a group of classes tends to be used together or has a high level of cohesion, they should be grouped into the same package or module. This approach aims to make it easier for developers to reuse components and understand their relationships (Robert C. Martin, 2018, p. 121). |

Table D.1.: The Component Cohesion Principles

Cohesion facilitates the reduction of complexity and interdependence among the components of a system, thereby contributing to a more efficient, maintainable, and reliable system. By organizing components around a shared purpose or function or by standardizing their interfaces, data structures, and protocols, cohesion can offer the following benefits:

- **Reduce redundancy and duplication of effort:**

Cohesion ensures that components are arranged around a common purpose or function, reducing duplicates or redundant code. This simplifies system comprehension, maintenance, and modification.

- **Promoting code reuse:**

Cohesion facilitates code reuse by making it easier to extract and reuse components designed for specific functions. This saves time and effort during development and enhances overall system quality.

- **Enhance maintainability:**

Cohesion decreases the complexity and interdependence of system components, making it easier to identify and rectify bugs or errors in the code. This improves system maintainability and reduces the risk of introducing new errors during maintenance.

- **Increase scalability:**

Cohesion improves a system's scalability by enabling it to be extended or modified effortlessly to accommodate changing requirements or conditions. By designing well-organized and well-defined components, developers can easily add or modify functionality as needed without disrupting the rest of the system.