


tlm_utils::simple_initiator
_socket_b::process::set
_transport_ptr

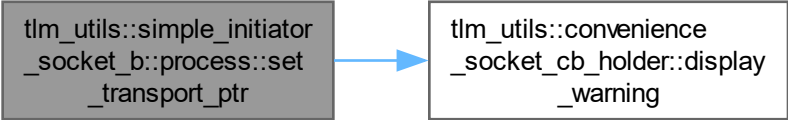

```
graph LR; A["tlm_utils::simple_initiator  
_socket_b::process::set  
_transport_ptr"] --> B["tlm_utils::convenience  
_socket_cb_holder::display  
_warning"]
```

A diagram showing a call from the `simple_initiator` to the `convenience` class. The left box, representing the caller, is shaded gray and contains the text `tlm_utils::simple_initiator`, `_socket_b::process::set`, and `_transport_ptr`. A blue arrow points from this box to the right box, which is white and represents the callee. The right box contains the text `tlm_utils::convenience`, `_socket_cb_holder::display`, and `_warning`.

tlm_utils::convenience
_socket_cb_holder::display
_warning