


```
tlm_utils::passthrough  
_target_socket_tagged  
_b::register_transport_dbg
```

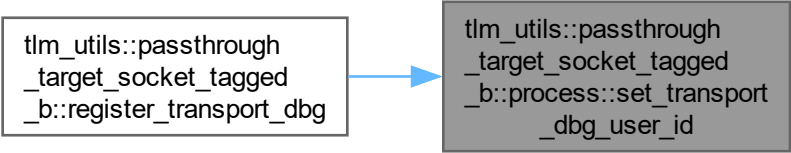

```
graph LR; A["tlm_utils::passthrough  
_target_socket_tagged  
_b::register_transport_dbg"] --> B["tlm_utils::passthrough  
_target_socket_tagged  
_b::process::set_transport  
_dbg_user_id"]
```

```
tlm_utils::passthrough  
_target_socket_tagged  
_b::process::set_transport  
_dbg_user_id
```