


```
tlm_utils::passthrough  
_target_socket_tagged  
_b::register_b_transport
```

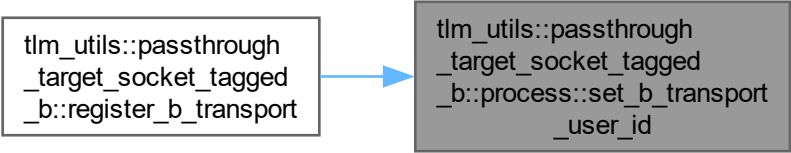

A diagram illustrating a function call. A white rectangular box on the left contains the code `tlm_utils::passthrough`, `_target_socket_tagged`, and `_b::register_b_transport`. A blue arrow points from the right side of this box to a gray rectangular box on the right. The gray box contains the code `tlm_utils::passthrough`, `_target_socket_tagged`, `_b::process::set_b_transport`, and `_user_id`.

```
tlm_utils::passthrough  
_target_socket_tagged  
_b::process::set_b_transport  
_user_id
```