

Data binding in- Angular


By Dnyanesh Sir

Contact us +91 9096652214

Data Binding in Angular

Understanding Databinding

Databinding = Communication

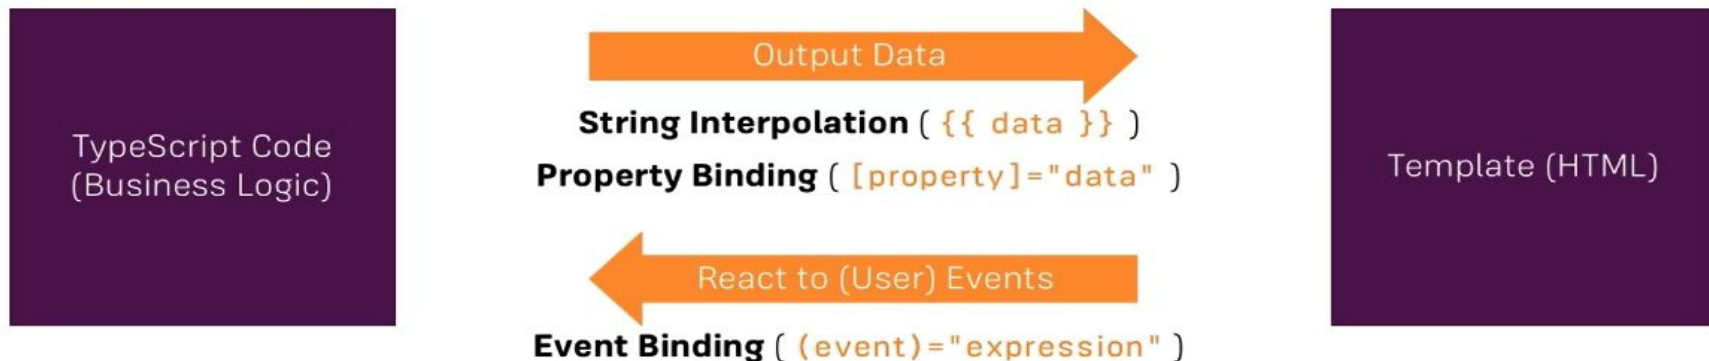

Combination of Both: **Two-Way-Binding** ([(ngModel)]="data")

Data Binding in Angular

Data binding is the core concept of Angular and used to define the communication between a component and the DOM.

It is a technique to link your data to your view layer(html).

In simple words, you can say that data binding is a communication between your typescript code of your component and your template which user sees.

Types of data binding

There are two types data binding

- one-way data binding
- two-way data binding.


One-way databinding: One way databinding is a simple one way communication where HTML template is changed when we make changes in TypeScript code.

Angular Interpolation / String Interpolation, Property Binding, and Event Binding are the example of one-way databinding.

Two-way databinding

In two-way databinding, automatic synchronization of data happens between the Model(typescript) and the View(html). Here, change is reflected in both components.

Whenever you make changes in the Model(typescript), it will be reflected in the View(html) and when you make changes in View, it will be reflected in Model.

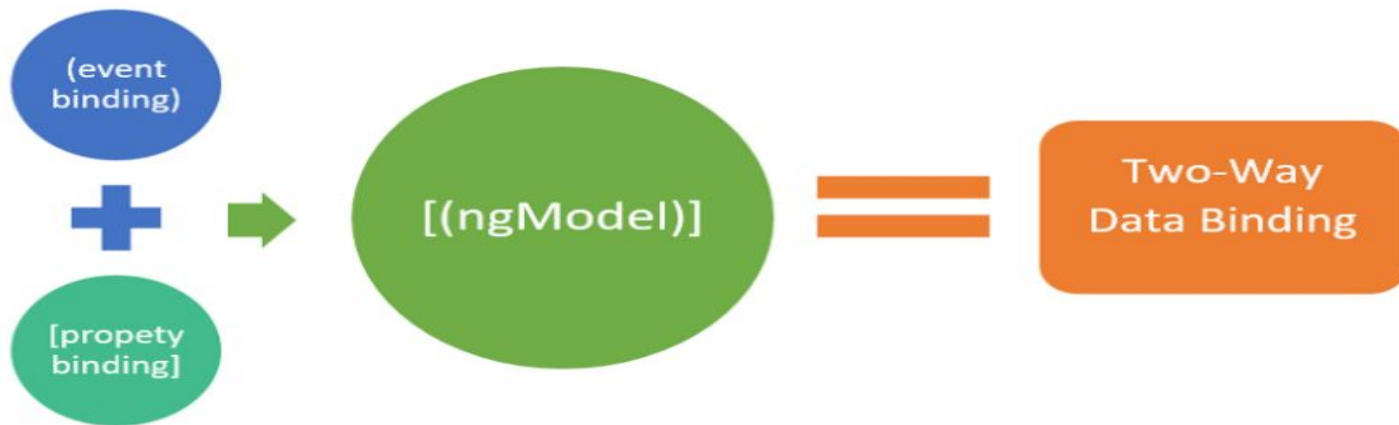

Angular provides four types of data binding

- String Interpolation `{{}}`
- Property Binding `[]`
- Event Binding `()`
- Two-way binding `[(ngModel)]`


String Interpolation

String Interpolation is a one-way databinding technique which is used to output the data from a TypeScript code to HTML template (view).

It uses the template expression in double curly braces to display the data from the component to the view.

For example:

{{ name }}

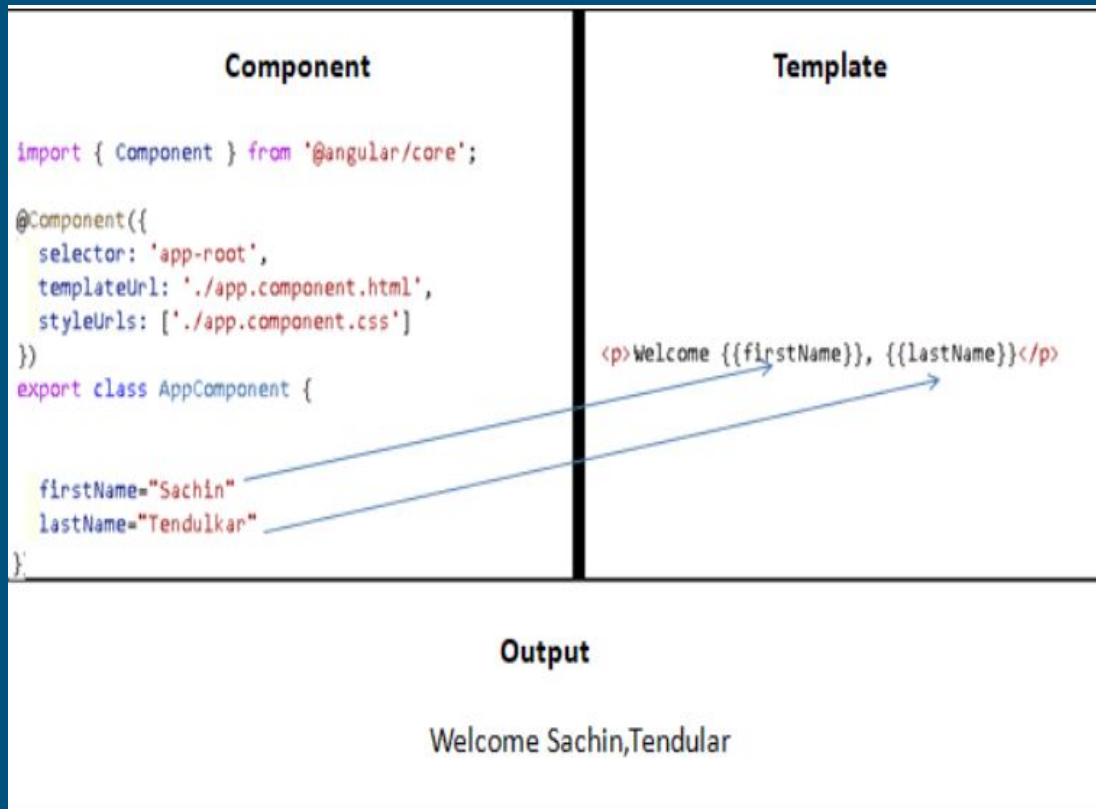

Property Binding

Property Binding is also a one-way data binding technique. In property binding, we bind a property of a DOM element to a field which is a defined property in our component TypeScript code.

For example:

```
<img [src]="imgUrl"/>
```


Event Binding

In Angular event binding is used to handle the events raised from the DOM like button click, mouse move etc. When the DOM event happens (eg. click, change, keyup), it calls the specified method in the component.

In the following example, the `show()` method from the component is called when the button is clicked:

```
<button (click)="show()"></button>
```

Two-way Data Binding

We have seen that in one-way data binding any change in the template (view) were not be reflected in the component TypeScript code. To resolve this problem, Angular provides two-way data binding. The two-way binding has a feature to update data from component to view and vice-versa.

In two way data binding, property binding and event binding are combined together.

Syntax :

`[(ngModel)] = "username"`

```
<div>
  User name : <input type="text" [(ngModel)]="lastName">
</div>
```

```
1  description : string = 'this is angular data binding example ,
2  imageUrl = 'https://www.freecodecamp.org/news/content/images/size/w2000
3
4  lastName : string = "Angularbinding"
5
6  constructor() { }
7  ngOnInit(): void {
8
```

Thank you

Contact us - 96650 44698

