

FCN-Baseline-30E-14L-01

March 24, 2021

1 Are Relations Relevant in CNNs? *A Study Based on a Facial Dataset*

1.1 Baseline FCN (*30 Epochs - 14 Layers*)

1.1.1 Imports, Seed, GPU integration

```
[1]: import numpy as np
import random
import tensorflow as tf
```

```
[2]: # Seeds for better reproducibility
seed = 42
np.random.seed(seed)
random.seed(seed)
tf.random.set_seed(seed)
```

```
[3]: from tensorflow.keras.layers import Dropout, Conv2D, GlobalMaxPooling2D, \
↳BatchNormalization, Activation, MaxPool2D
from tensorflow.keras.optimizers import Adam
from tensorflow.keras.models import load_model
from tensorflow.keras.preprocessing.image import ImageDataGenerator
from tensorflow.python.keras.models import Sequential
from sklearn.metrics import confusion_matrix
import itertools
import matplotlib.pyplot as plt
import warnings
warnings.simplefilter(action='ignore', category=FutureWarning)
%matplotlib inline
```

```
[4]: physical_devices = tf.config.experimental.list_physical_devices('GPU')
print("Num GPUs Available: ", len(physical_devices))
tf.config.experimental.set_memory_growth(physical_devices[0], True)
```

Num GPUs Available: 1

1.1.2 Data preparation

```
[5]: train_path = '../..//picasso_dataset/basis-data/middle/train'
      valid_path = '../..//picasso_dataset/basis-data/middle/valid'
      test_path = '../..//picasso_dataset/basis-data/middle/test'

[6]: train_batches = ImageDataGenerator(preprocessing_function=tf.keras.applications.
      ↪vgg16.preprocess_input) \
      .flow_from_directory(directory=train_path, target_size=(224,224),
      ↪classes=['no_face', 'face'], batch_size=20)

      valid_batches = ImageDataGenerator(preprocessing_function=tf.keras.applications.
      ↪vgg16.preprocess_input) \
      .flow_from_directory(directory=valid_path, target_size=(224,224),
      ↪classes=['no_face', 'face'], batch_size=10)

      test_batches = ImageDataGenerator(preprocessing_function=tf.keras.applications.
      ↪vgg16.preprocess_input) \
      .flow_from_directory(directory=test_path, target_size=(224,224),
      ↪classes=['no_face', 'face'], batch_size=10, shuffle=False)
```

Found 16002 images belonging to 2 classes.

Found 998 images belonging to 2 classes.

Found 3000 images belonging to 2 classes.

```
[7]: assert train_batches.n == 16002
      assert valid_batches.n == 998
      assert test_batches.n == 3000
      assert train_batches.num_classes == valid_batches.num_classes == test_batches.
      ↪num_classes == 2
```

1.1.3 Building and training the FCN

```
[8]: dropout_rate=0.2

[9]: model = Sequential(name = "FCN-Baseline")

      model.add(Conv2D(filters=32, kernel_size=(3, 3), activation='relu', padding =
      ↪'same', input_shape=(224,224,3), name = "Conv_1"))
      model.add(MaxPool2D(pool_size=(2, 2), name = "Max_1"))
      model.add(Dropout(rate=dropout_rate, name = "DO_1"))
      model.add(BatchNormalization(name = "BN_1"))

      model.add(Conv2D(filters=64, kernel_size=(3, 3), activation='relu', padding =
      ↪'same', name = "Conv_2"))
      model.add(MaxPool2D(pool_size=(2, 2), name = "Max_2"))
```

```

model.add(Conv2D(filters=128, kernel_size=(3, 3), activation='relu', padding =
↳ 'same', name = "Conv_3"))
model.add(MaxPool2D(pool_size=(2, 2), name = "Max_3"))
model.add(Dropout(rate=dropout_rate, name = "DO_3"))

model.add(Conv2D(filters=256, kernel_size=(3, 3), activation='relu', padding =
↳ 'same', name = "Conv_4"))
model.add(MaxPool2D(pool_size=(2, 2), name = "Max_4"))

# Fully connected layer
model.add(Conv2D(filters=2, kernel_size=(1,1), name = "Conv_con"))
model.add(GlobalMaxPooling2D(name = "GMax_con"))
model.add(Activation('softmax', name = "Act_con"))

model.summary()
untrained_weights = list(model.get_weights()[0][0][0][0])

```

Model: "FCN-Baseline"

Layer (type)	Output Shape	Param #
Conv_1 (Conv2D)	(None, 224, 224, 32)	896
Max_1 (MaxPooling2D)	(None, 112, 112, 32)	0
DO_1 (Dropout)	(None, 112, 112, 32)	0
BN_1 (BatchNormalization)	(None, 112, 112, 32)	128
Conv_2 (Conv2D)	(None, 112, 112, 64)	18496
Max_2 (MaxPooling2D)	(None, 56, 56, 64)	0
Conv_3 (Conv2D)	(None, 56, 56, 128)	73856
Max_3 (MaxPooling2D)	(None, 28, 28, 128)	0
DO_3 (Dropout)	(None, 28, 28, 128)	0
Conv_4 (Conv2D)	(None, 28, 28, 256)	295168
Max_4 (MaxPooling2D)	(None, 14, 14, 256)	0
Conv_con (Conv2D)	(None, 14, 14, 2)	514
GMax_con (GlobalMaxPooling2D)	(None, 2)	0

```

Act_con (Activation)                (None, 2)                0
=====
Total params: 389,058
Trainable params: 388,994
Non-trainable params: 64
-----

```

```

[10]: model.compile(optimizer=Adam(learning_rate=0.0001),
                loss='categorical_crossentropy',
                metrics=['accuracy'] )

```

```

[11]: history = model.fit(x=train_batches,
                steps_per_epoch=len(train_batches),
                validation_data=valid_batches,
                validation_steps=len(valid_batches),
                epochs=30,
                verbose=2 )

```

Epoch 1/30

WARNING:tensorflow:Callbacks method `on_train_batch_end` is slow compared to the batch time (batch time: 0.0141s vs `on_train_batch_end` time: 0.0224s). Check your callbacks.

801/801 - 42s - loss: 0.6363 - accuracy: 0.6172 - val_loss: 0.5676 - val_accuracy: 0.7004

Epoch 2/30

801/801 - 41s - loss: 0.4155 - accuracy: 0.8123 - val_loss: 0.3244 - val_accuracy: 0.8647

Epoch 3/30

801/801 - 41s - loss: 0.2680 - accuracy: 0.8942 - val_loss: 0.1919 - val_accuracy: 0.9389

Epoch 4/30

801/801 - 42s - loss: 0.1818 - accuracy: 0.9340 - val_loss: 0.1169 - val_accuracy: 0.9639

Epoch 5/30

801/801 - 42s - loss: 0.1350 - accuracy: 0.9511 - val_loss: 0.1049 - val_accuracy: 0.9679

Epoch 6/30

801/801 - 42s - loss: 0.1044 - accuracy: 0.9630 - val_loss: 0.0783 - val_accuracy: 0.9760

Epoch 7/30

801/801 - 42s - loss: 0.0840 - accuracy: 0.9718 - val_loss: 0.0736 - val_accuracy: 0.9810

Epoch 8/30

801/801 - 42s - loss: 0.0708 - accuracy: 0.9751 - val_loss: 0.0599 - val_accuracy: 0.9860

Epoch 9/30

801/801 - 42s - loss: 0.0541 - accuracy: 0.9824 - val_loss: 0.0446 - val_accuracy: 0.9870

Epoch 10/30
801/801 - 41s - loss: 0.0446 - accuracy: 0.9851 - val_loss: 0.0328 -
val_accuracy: 0.9890
Epoch 11/30
801/801 - 41s - loss: 0.0385 - accuracy: 0.9881 - val_loss: 0.0318 -
val_accuracy: 0.9910
Epoch 12/30
801/801 - 42s - loss: 0.0346 - accuracy: 0.9890 - val_loss: 0.0414 -
val_accuracy: 0.9840
Epoch 13/30
801/801 - 42s - loss: 0.0284 - accuracy: 0.9910 - val_loss: 0.0353 -
val_accuracy: 0.9910
Epoch 14/30
801/801 - 42s - loss: 0.0215 - accuracy: 0.9931 - val_loss: 0.0293 -
val_accuracy: 0.9910
Epoch 15/30
801/801 - 42s - loss: 0.0219 - accuracy: 0.9933 - val_loss: 0.0141 -
val_accuracy: 0.9960
Epoch 16/30
801/801 - 41s - loss: 0.0155 - accuracy: 0.9948 - val_loss: 0.0154 -
val_accuracy: 0.9950
Epoch 17/30
801/801 - 42s - loss: 0.0154 - accuracy: 0.9955 - val_loss: 0.0212 -
val_accuracy: 0.9930
Epoch 18/30
801/801 - 42s - loss: 0.0163 - accuracy: 0.9951 - val_loss: 0.0140 -
val_accuracy: 0.9940
Epoch 19/30
801/801 - 42s - loss: 0.0085 - accuracy: 0.9976 - val_loss: 0.0152 -
val_accuracy: 0.9940
Epoch 20/30
801/801 - 41s - loss: 0.0126 - accuracy: 0.9963 - val_loss: 0.0164 -
val_accuracy: 0.9950
Epoch 21/30
801/801 - 41s - loss: 0.0100 - accuracy: 0.9968 - val_loss: 0.0137 -
val_accuracy: 0.9970
Epoch 22/30
801/801 - 42s - loss: 0.0090 - accuracy: 0.9976 - val_loss: 0.0088 -
val_accuracy: 0.9970
Epoch 23/30
801/801 - 42s - loss: 0.0073 - accuracy: 0.9977 - val_loss: 0.0234 -
val_accuracy: 0.9910
Epoch 24/30
801/801 - 42s - loss: 0.0088 - accuracy: 0.9973 - val_loss: 0.0314 -
val_accuracy: 0.9910
Epoch 25/30
801/801 - 42s - loss: 0.0084 - accuracy: 0.9974 - val_loss: 0.0083 -
val_accuracy: 0.9980

```

Epoch 26/30
801/801 - 42s - loss: 0.0088 - accuracy: 0.9974 - val_loss: 0.0068 -
val_accuracy: 0.9990
Epoch 27/30
801/801 - 42s - loss: 0.0072 - accuracy: 0.9979 - val_loss: 0.0079 -
val_accuracy: 0.9960
Epoch 28/30
801/801 - 42s - loss: 0.0059 - accuracy: 0.9980 - val_loss: 0.0062 -
val_accuracy: 0.9990
Epoch 29/30
801/801 - 42s - loss: 0.0056 - accuracy: 0.9983 - val_loss: 0.0101 -
val_accuracy: 0.9980
Epoch 30/30
801/801 - 42s - loss: 0.0061 - accuracy: 0.9979 - val_loss: 0.0104 -
val_accuracy: 0.9940

```

1.1.4 Saving the model

```

[12]: filename='models/FCN-B-30E-14L-01.h5'

[13]: model.save(filename)
      saved_weights = list(model.get_weights()[0][0][0][0])

```

1.1.5 Loading the saved model

```

[14]: loaded_model = load_model(filename)
      loaded_weights = list(loaded_model.get_weights()[0][0][0][0])

[15]: # Assertion that the model was saved and loaded successfully
      assert untrained_weights != saved_weights
      assert saved_weights == loaded_weights

```

1.1.6 Accuracy and loss of the trained model

```

[16]: scores = loaded_model.evaluate(test_batches, verbose=2)
      print("Accuracy: %.2f%%" % (scores[1]*100))
      print("Loss: %.2f%%" % (scores[0]*100))

```

```

300/300 - 7s - loss: 0.0087 - accuracy: 0.9967
Accuracy: 99.67%
Loss: 0.87%


```

```


[17]: #Course of accuracy
      plt.plot(history.history['accuracy'])
      plt.plot(history.history['val_accuracy'])
      plt.title('model accuracy')
      plt.ylabel('accuracy')

```

```
plt.xlabel('epoch')
plt.legend(['train', 'valid'], loc='upper left')
plt.show()
```

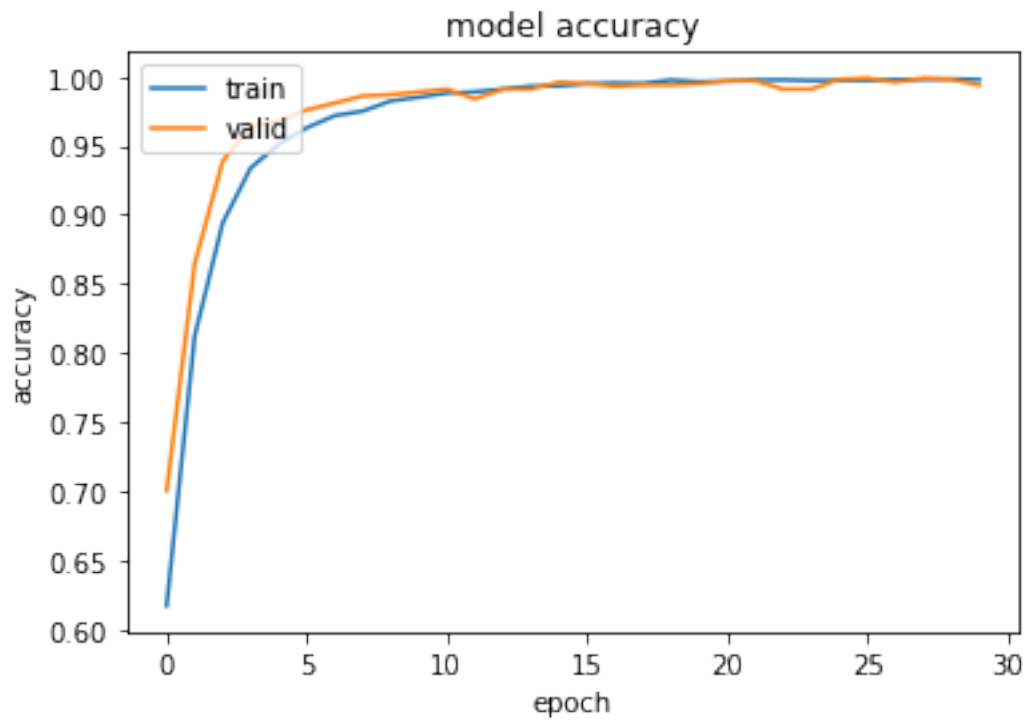

```
[18]: #Course of loss
plt.plot(history.history['loss'])
plt.plot(history.history['val_loss'])
plt.title('model loss')
plt.ylabel('loss')
plt.xlabel('epoch')
plt.legend(['train', 'valid'], loc='upper left')
plt.show()
```

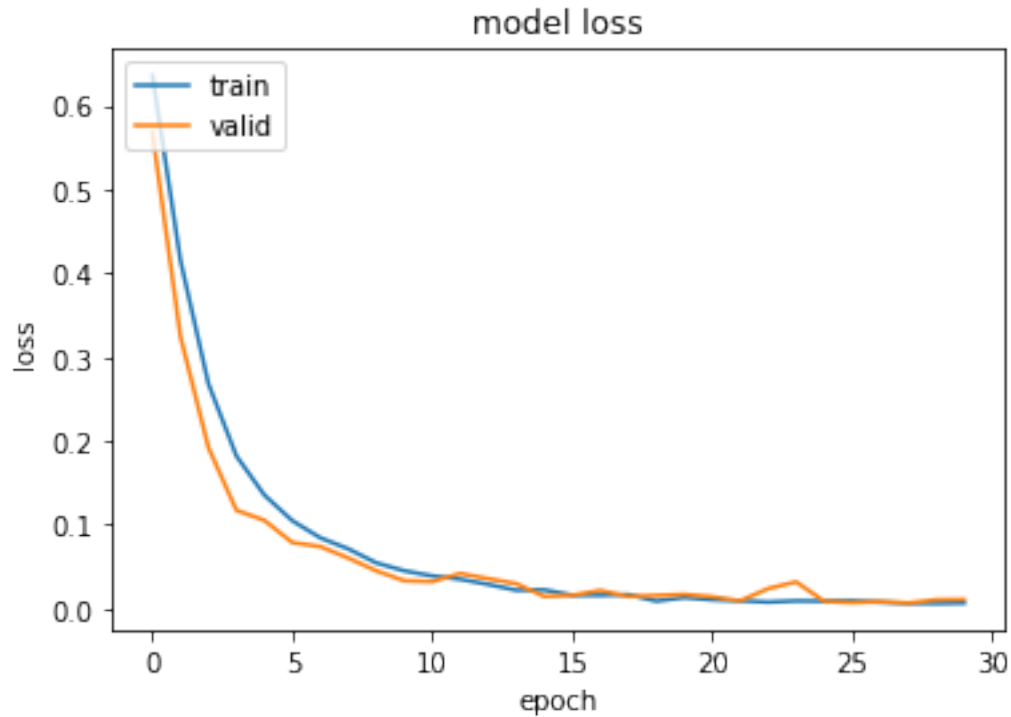

1.1.7 Testing the CNN

```
[19]: predictions = loaded_model.predict(x=test_batches, steps=len(test_batches),
    ↪ verbose=0)
```

1.1.8 Index of wrongly predicted pictures

```
[20]: y_true=test_batches.classes
y_pred=np.argmax(predictions, axis=-1)
cm = confusion_matrix(y_true = y_true, y_pred = y_pred)
```

```
[21]: face_but_predicted_no_face=[]
no_face_but_predicted_face=[]

for i in range(len(predictions)):
    if y_true[i] != y_pred[i]:
        if y_true[i] == 1:
            face_but_predicted_no_face.append(i+8001-1500) #Index of file
    ↪ on disk
        else:
            no_face_but_predicted_face.append(i+8001) #Index of file on disk
```



```

print("Data from class 'face', that was wrongly predicted as 'no-face' [",
      ↪len(face_but_predicted_no_face), "] :")
print(face_but_predicted_no_face)
print("-----")
print("Data from class 'no-face', that was wrongly predicted as 'face' [",
      ↪len(no_face_but_predicted_face), "] :")
print(no_face_but_predicted_face)

```

Data from class 'face', that was wrongly predicted as 'no-face' [3] :
 [8727, 9052, 9472]

Data from class 'no-face', that was wrongly predicted as 'face' [7] :
 [8549, 8840, 8924, 8941, 8999, 9332, 9456]

1.1.9 Confusion matrix

```

[22]: def plot_confusion_matrix(cm, classes,
                                normalize=False,
                                title='Confusion matrix',
                                cmap=plt.cm.Blues):

    plt.imshow(cm, interpolation='nearest', cmap=cmap)
    plt.title(title)
    plt.colorbar()
    tick_marks = np.arange(len(classes))
    plt.xticks(tick_marks, classes, rotation=45)
    plt.yticks(tick_marks, classes)

    if normalize:
        cm = cm.astype('float') / cm.sum(axis=1)[:, np.newaxis]
        print("Normalized confusion matrix")
    else:
        print('Confusion matrix, without normalization')

    print(cm)

    thresh = cm.max() / 2.
    for i, j in itertools.product(range(cm.shape[0]), range(cm.shape[1])):
        plt.text(j, i, cm[i, j],
                 horizontalalignment="center",
                 color="white" if cm[i, j] > thresh else "black")

    plt.tight_layout()
    plt.ylabel('True label')
    plt.xlabel('Predicted label')

```

```
[23]: test_batches.class_indices
```

```
[23]: {'no_face': 0, 'face': 1}
```

```
[24]: cm_plot_labels = ['no_face', 'face']  
plot_confusion_matrix(cm=cm, classes=cm_plot_labels, title='Confusion Matrix')
```

Confusion matrix, without normalization

```
[[1493   7]  
 [   3 1497]]
```

