



factors, guildSEMnode = PreyNCC, guild = 01.ZooPreyNCC_JSOES

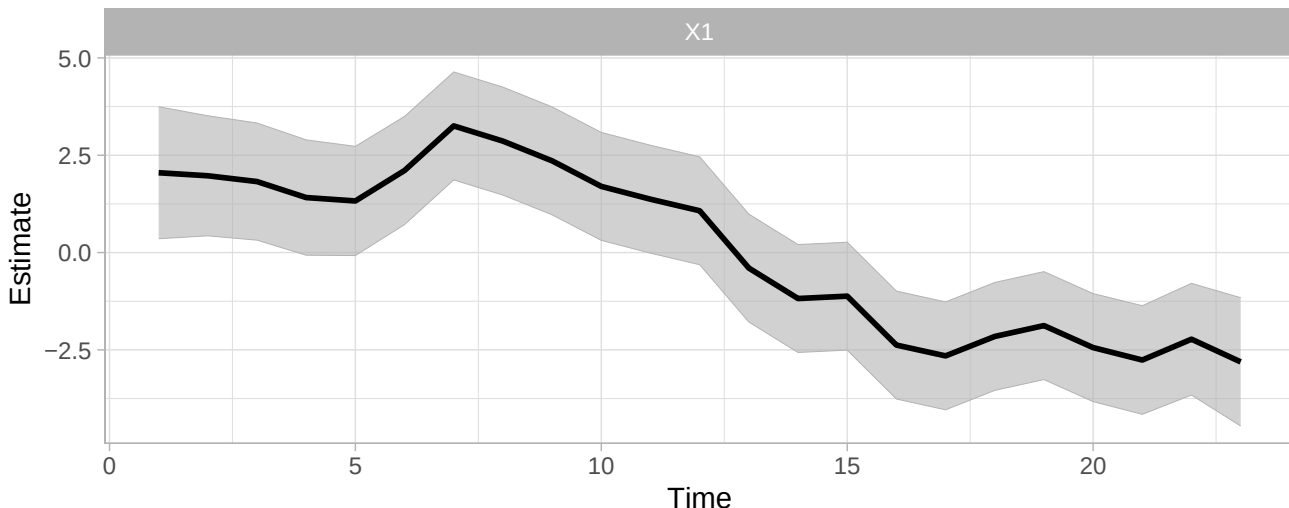


This is the estimate of X conditioned on the data from $t=1$ to T . Confidence intervals are for the expected value of X (conditioned on the data up to T).

expectation, guildSEMnode = PreyNCC, guild = 01.ZooPreyNCC_JSOES

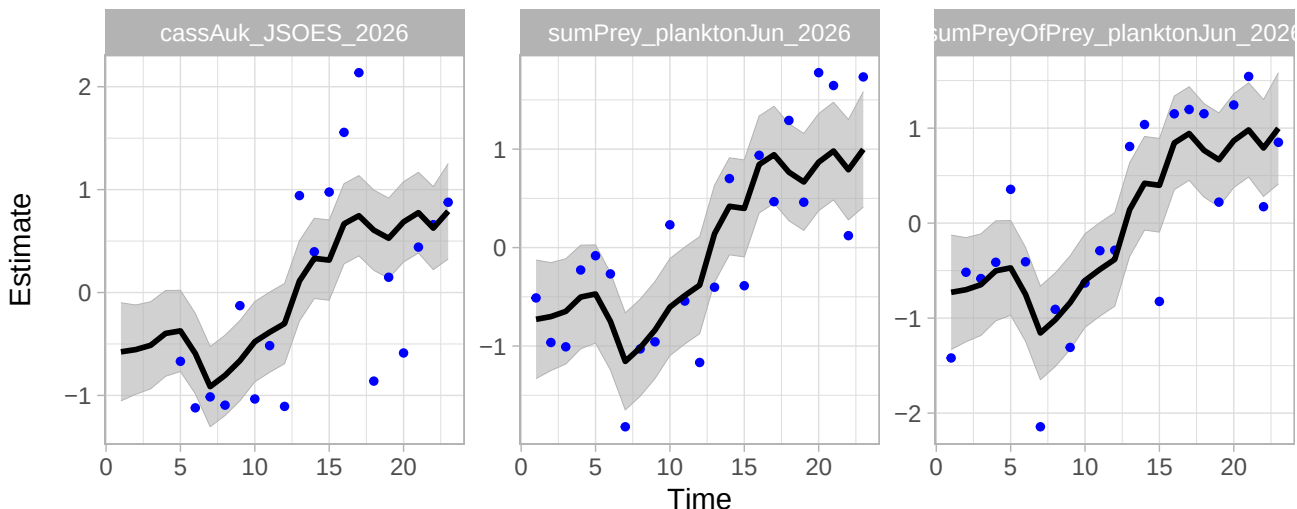


This is the model fitted value of Y conditioned on the data from $t=1$ to T . Use fitted.ytt1 if you want the one-step-ahead predictions instead. The CI is for the expected value of Y and the data points will not fall within the CI. Use prediction intervals to compare the data to intervals.

factors, guildSEMnode = PreyNCC, guild = 01.ZooPreyNCC_NHL

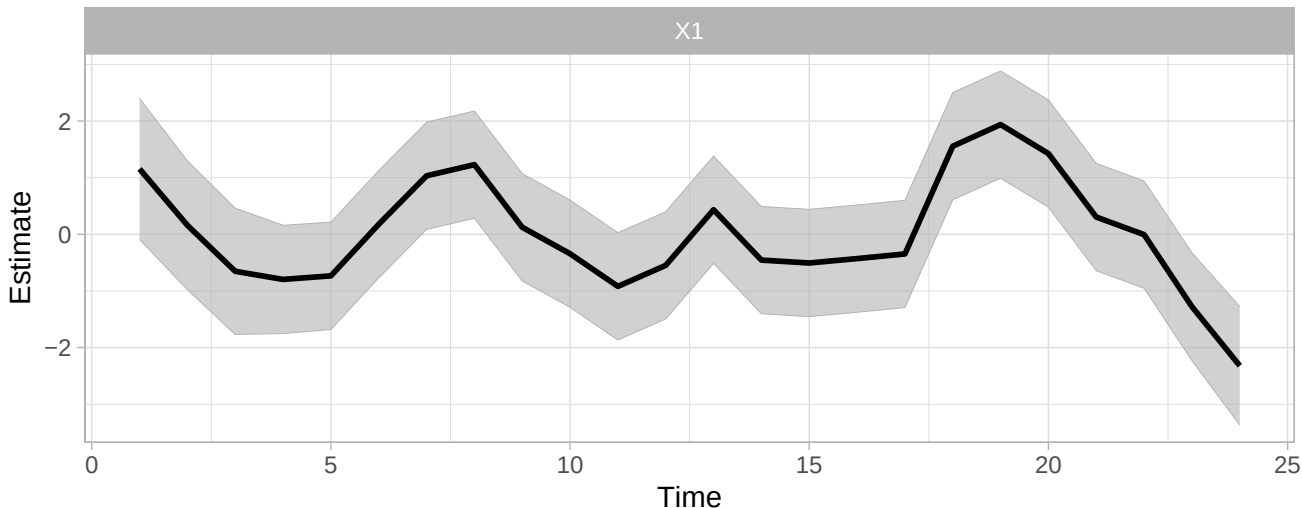


This is the estimate of X conditioned on the data from $t=1$ to T . Confidence intervals are for the expected value of X (conditioned on the data up to T).

expectation, guildSEMnode = PreyNCC, guild = 01.ZooPreyNCC_NHL

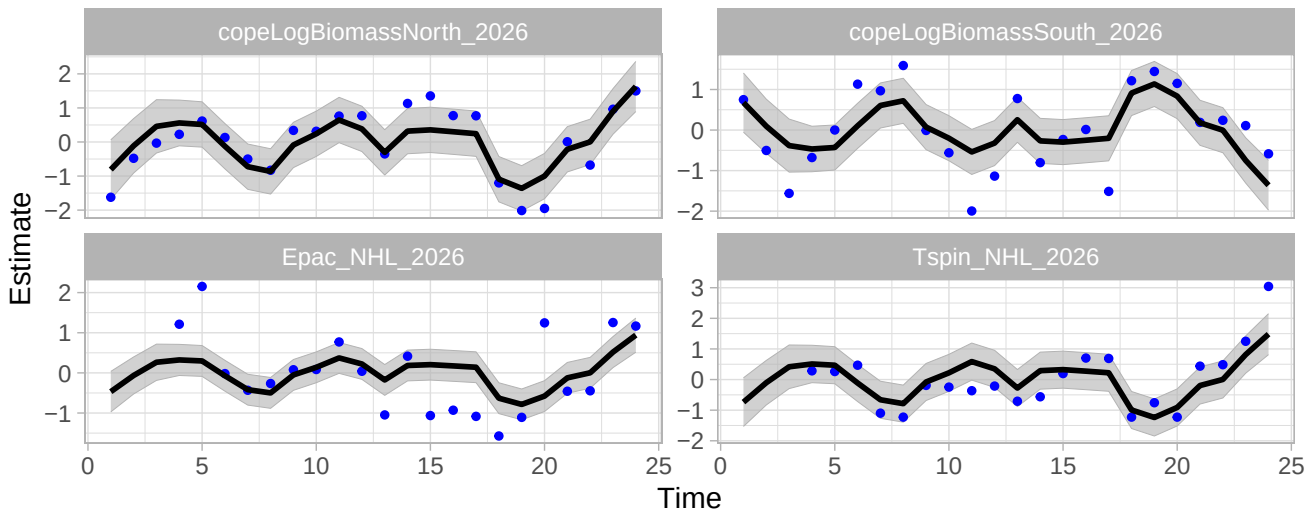


This is the model fitted value of Y conditioned on the data from $t=1$ to T . Use fitted.ytt1 if you want the one-step-ahead predictions instead. The CI is for the expected value of Y and the data points will not fall within the CI. Use prediction intervals to compare the data to intervals.

factors, guildSEMnode = PreyNCC, guild = 05.ForageFishNCC

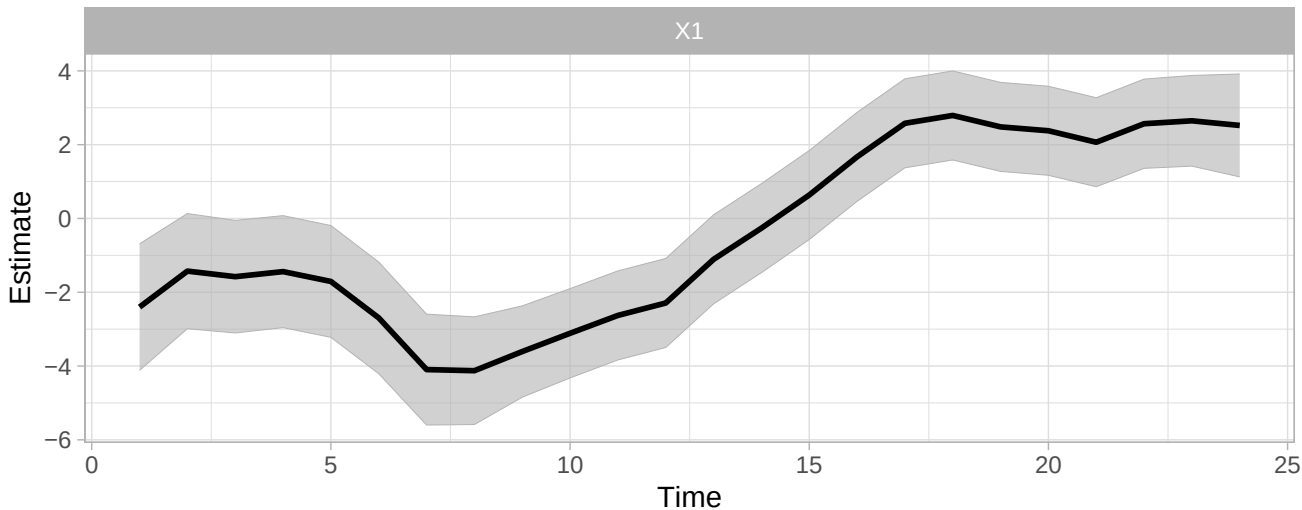


This is the estimate of X conditioned on the data from $t=1$ to T . Confidence intervals are for the expected value of X (conditioned on the data up to T).

expectation, guildSEMnode = PreyNCC, guild = 05.ForageFishNCC

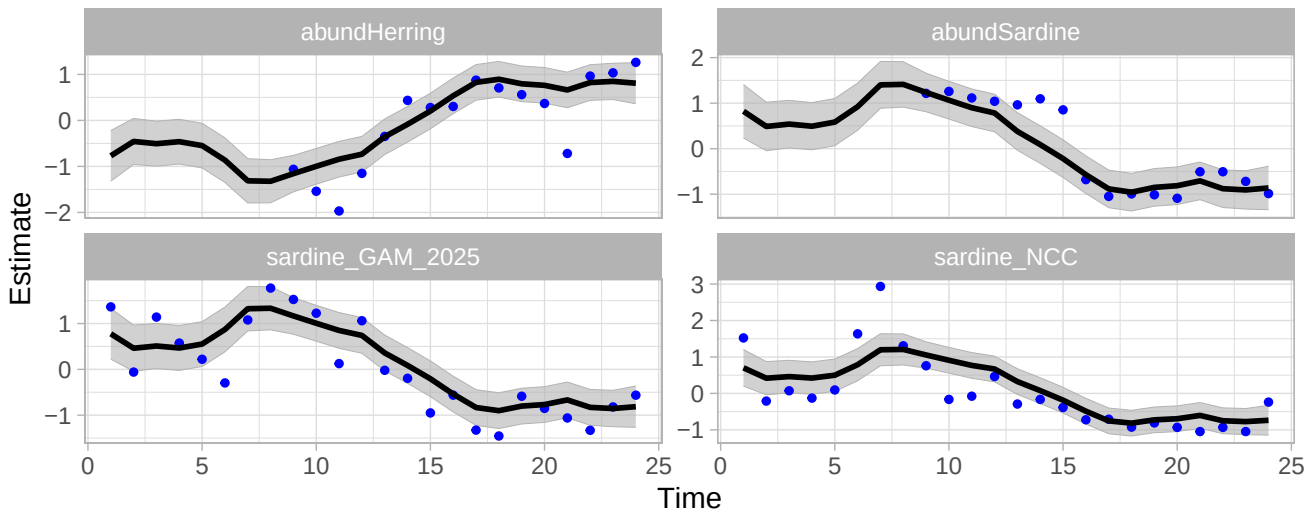


This is the model fitted value of Y conditioned on the data from $t=1$ to T . Use fitted.ytt1 if you want the one-step-ahead predictions instead. The CI is for the expected value of Y and the data points will not fall within the CI. Use prediction intervals to compare the data to intervals.

factors, guildSEMnode = Growth, guild = 06.Cond1NCC

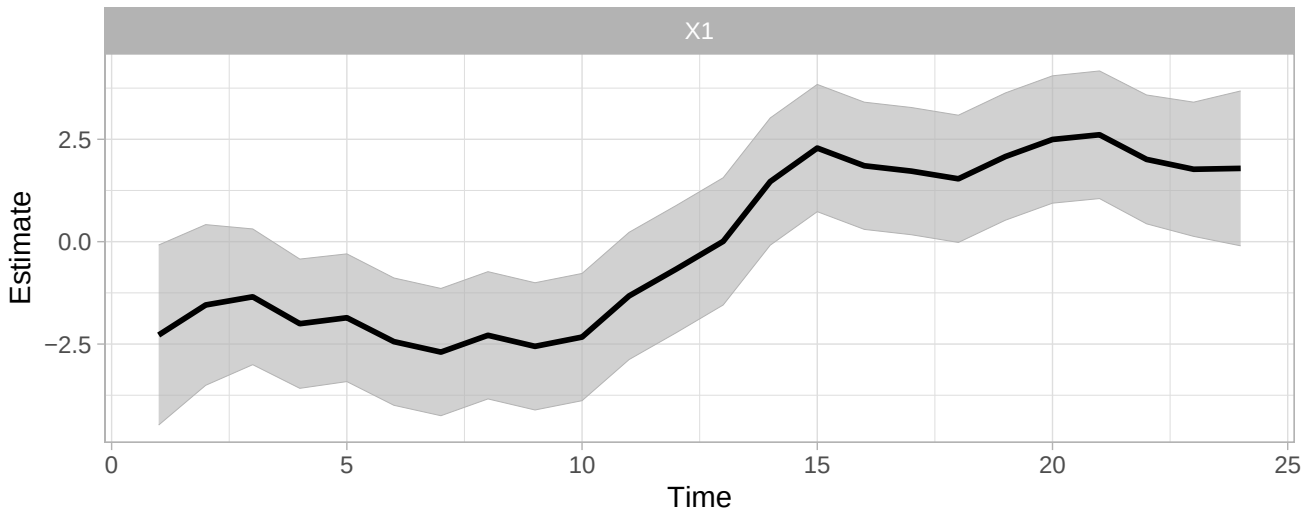


This is the estimate of X conditioned on the data from $t=1$ to T . Confidence intervals are for the expected value of X (conditioned on the data up to T).

expectation, guildSEMnode = Growth, guild = 06.Cond1NCC

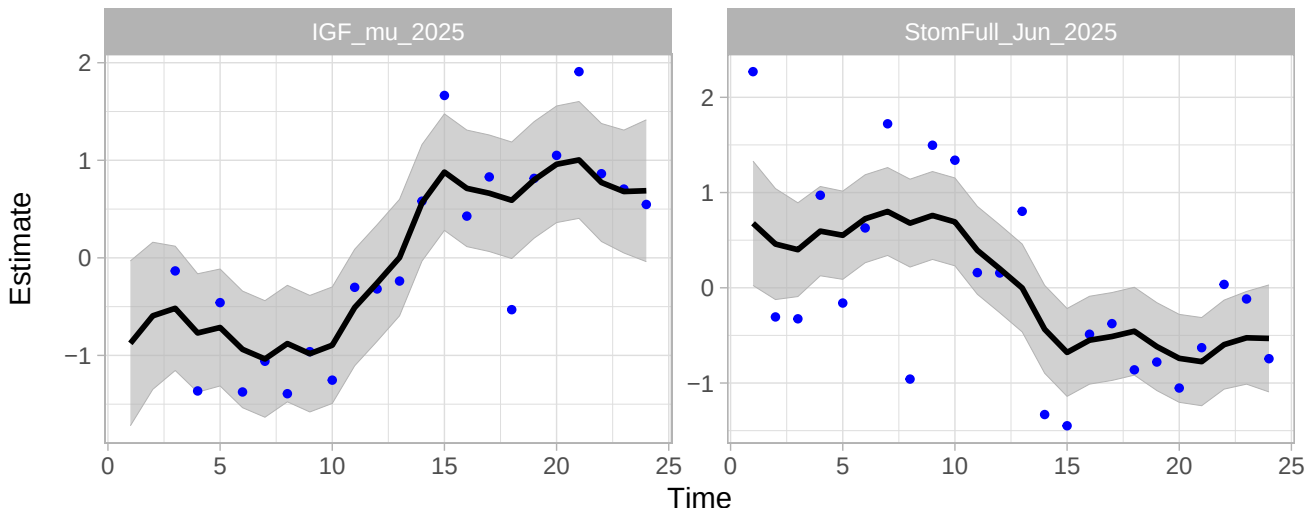


This is the model fitted value of Y conditioned on the data from $t=1$ to T . Use fitted.ytt1 if you want the one-step-ahead predictions instead. The CI is for the expected value of Y and the data points will not fall within the CI. Use prediction intervals to compare the data to intervals.

factors, guildSEMnode = Abundance, guild = 07.Cond2NCC

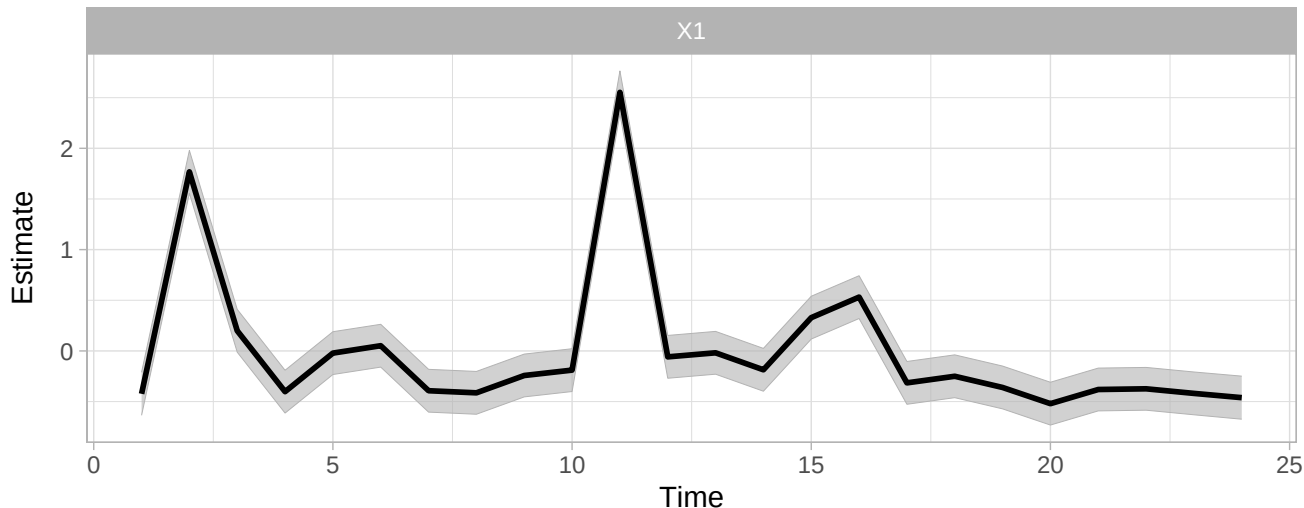

This is the estimate of X conditioned on the data from $t=1$ to T . Confidence intervals are for the expected value of X (conditioned on the data up to T).

expectation, guildSEMnode = Abundance, guild = 07.Cond2NCC


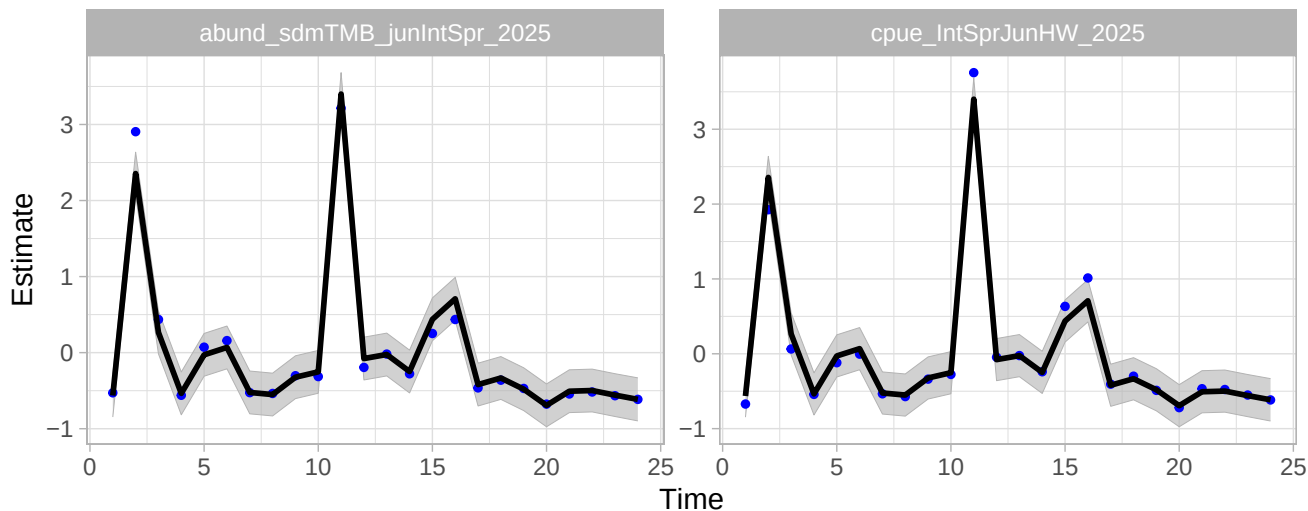


This is the model fitted value of Y conditioned on the data from $t=1$ to T . Use fitted.ytt1 if you want the one-step-ahead predictions instead. The CI is for the expected value of Y and the data points will not fall within the CI. Use prediction intervals to compare the data to intervals.

smoothed, guildSEMnode = PredNCC, guild = 08.PredBirdNCC


commonMurre_JSOES_2026

sootyShear_JSOES_2026

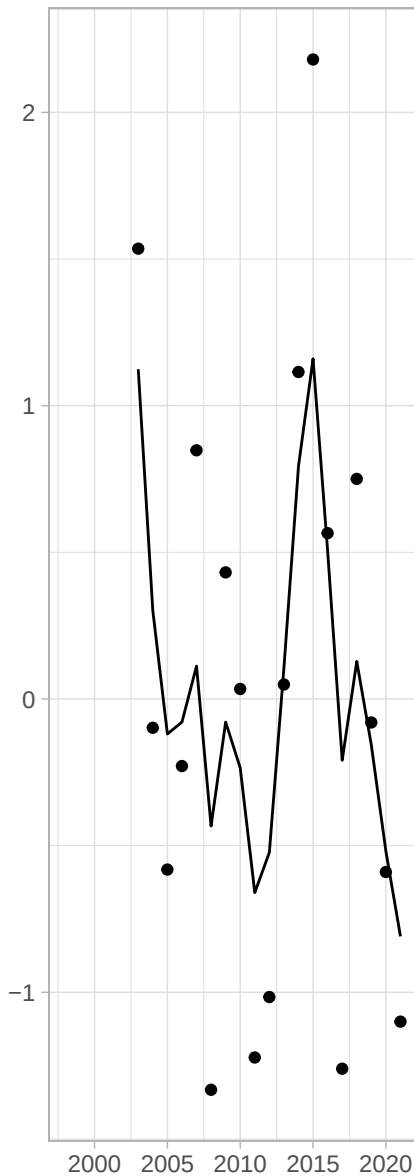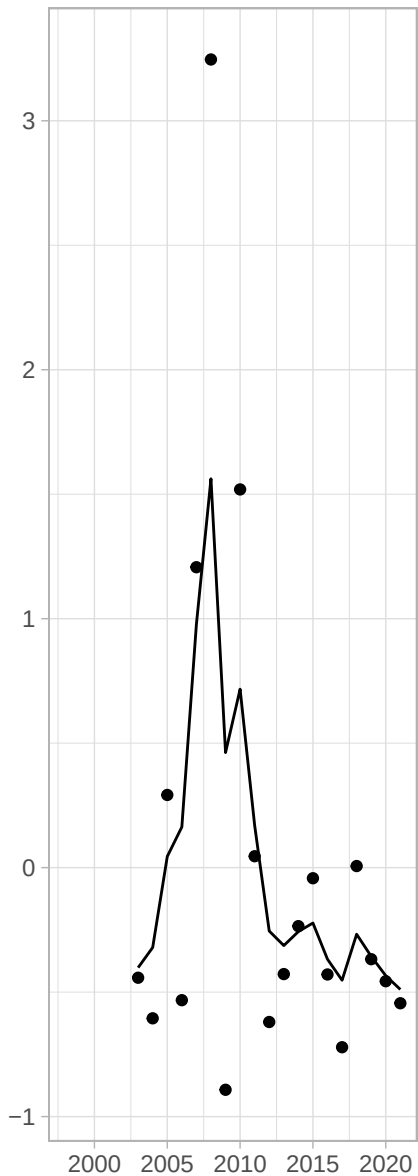


smoothed, guildSEMnode = PredNCC, guild = 08.PredBirdNCC_ess


Common_loon_WS_2026

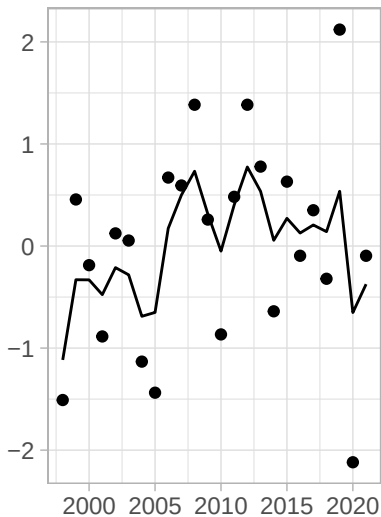


Northern_fulm_WS_2026

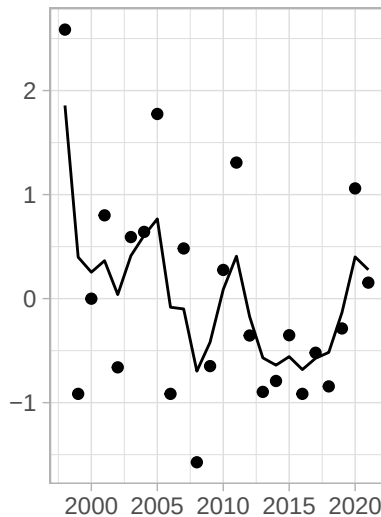

Pigeon_guil_WS_2026

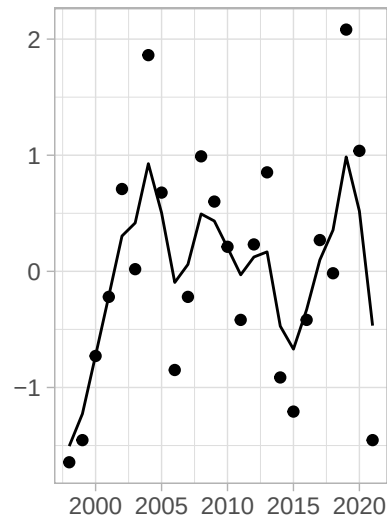


Sooty_shrw_WS_2026

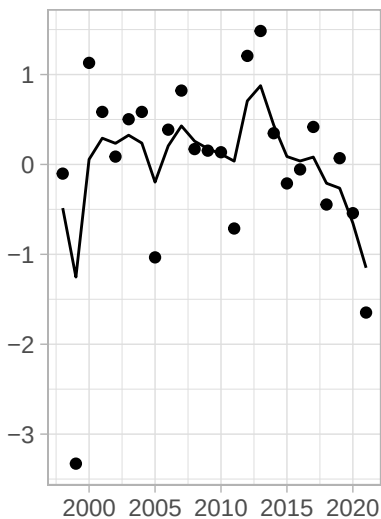


smoothed, guildSEMnode = PredNCC, guild = 08.PredBirdNCC_ess_II

Short_tailed_shrw_WS_2026

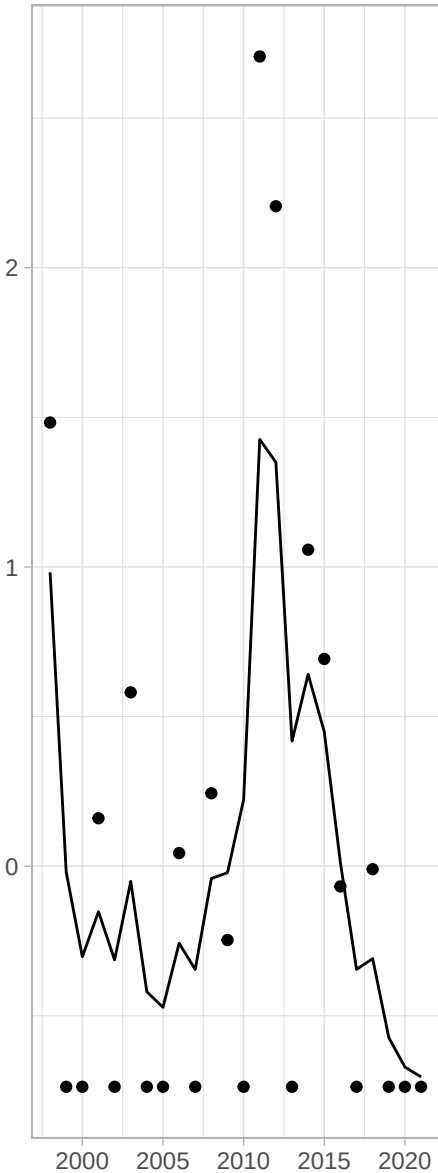


smoothed, guildSEMnode = PredNCC, guild = 08.PredBirdNCC_hump

Common_murre_WS_2026

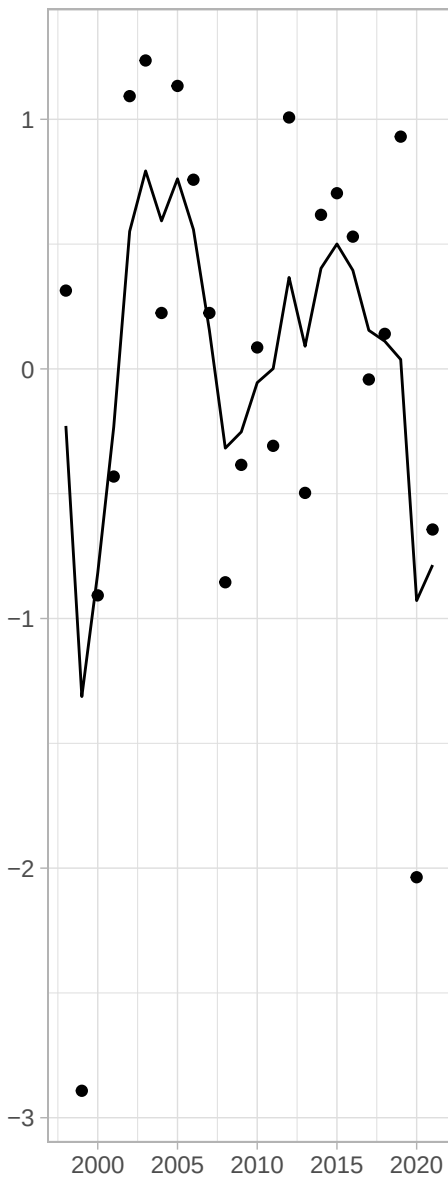


smoothed, guildSEMnode = PredNCC, guild = 08.PredBirdNCC_secular


Ancient_mrlt_WS_2026

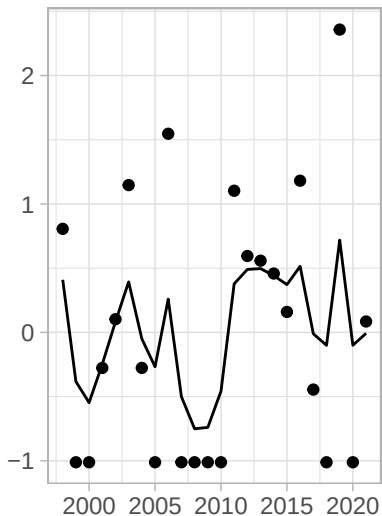


G_W_western_gull_WS_2026

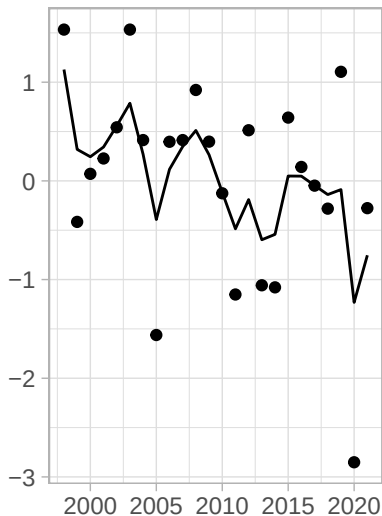


Rhinoceros_aukl_WS_2026

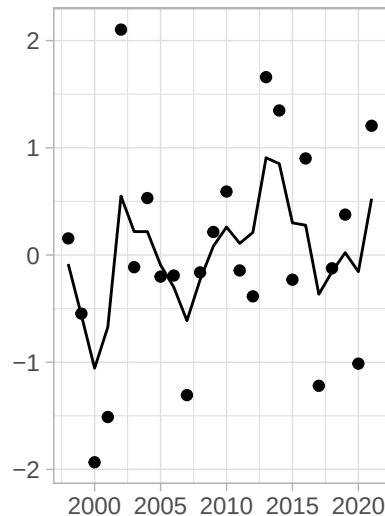

Western_grebe_WS_2026

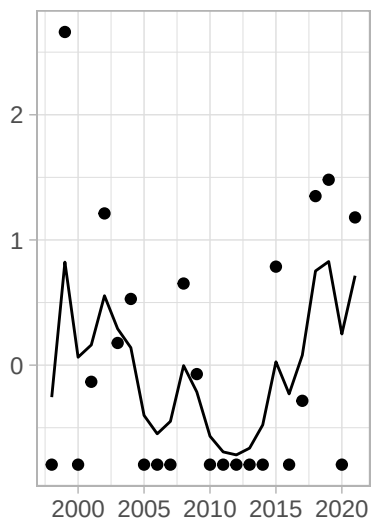


factors, guildSEMnode = PredNCC, guild = 09.PredFishNCC_b

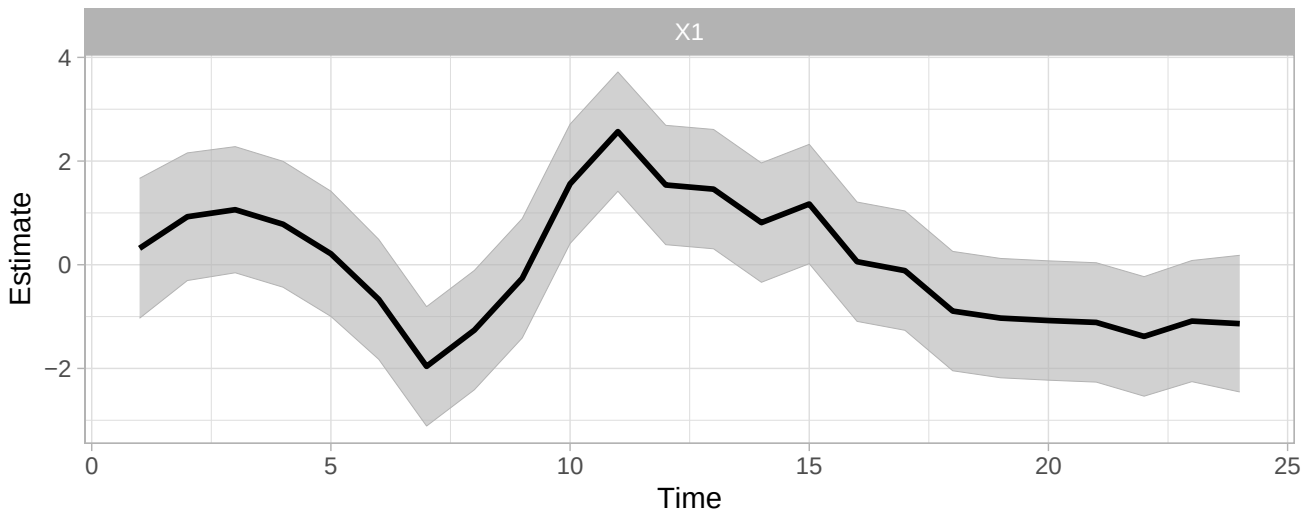


This is the estimate of X conditioned on the data from $t=1$ to T . Confidence intervals are for the expected value of X (conditioned on the data up to T).

expectation, guildSEMnode = PredNCC, guild = 09.PredFishNCC_b

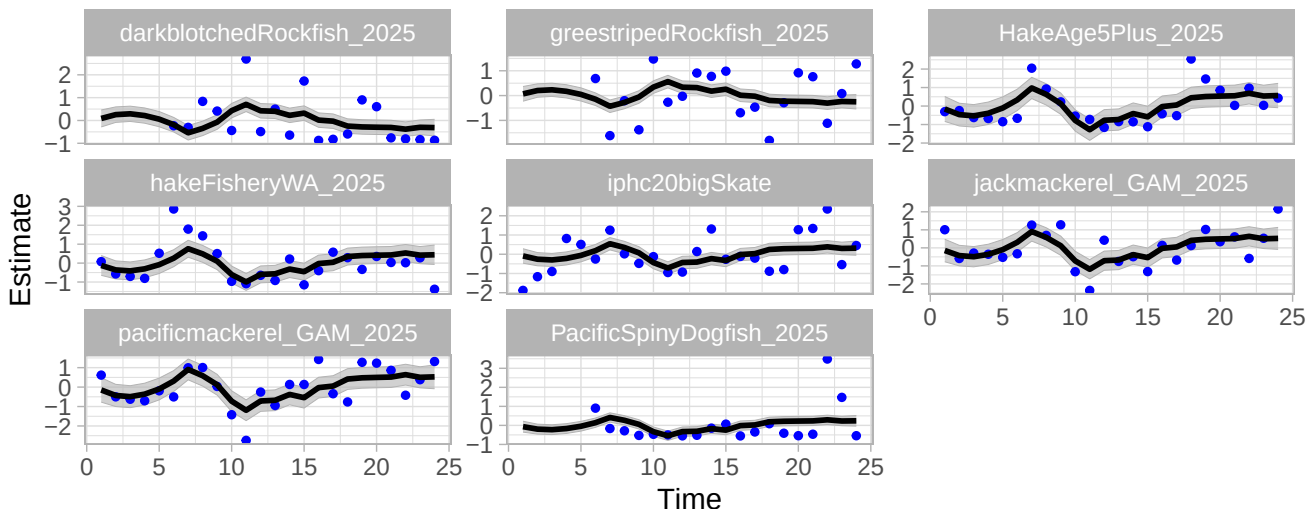


This is the model fitted value of Y conditioned on the data from $t=1$ to T . Use fitted.ytt1 if you want the one-step-ahead predictions instead. The CI is for the expected value of Y and the data points will not fall within the CI. Use prediction intervals to compare the data to intervals.

factors, guildSEMnode = PredAK, guild = 10.PredMammalNCC

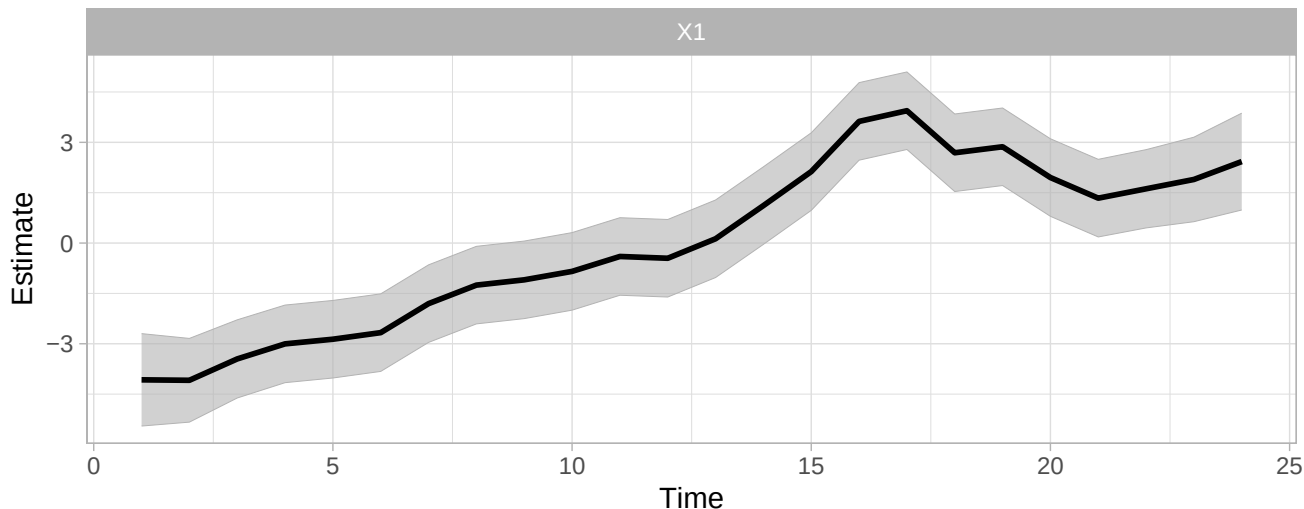

This is the estimate of X conditioned on the data from $t=1$ to T . Confidence intervals are for the expected value of X (conditioned on the data up to T).


expectation, guildSEMnode = PredAK, guild = 10.PredMammalNCC

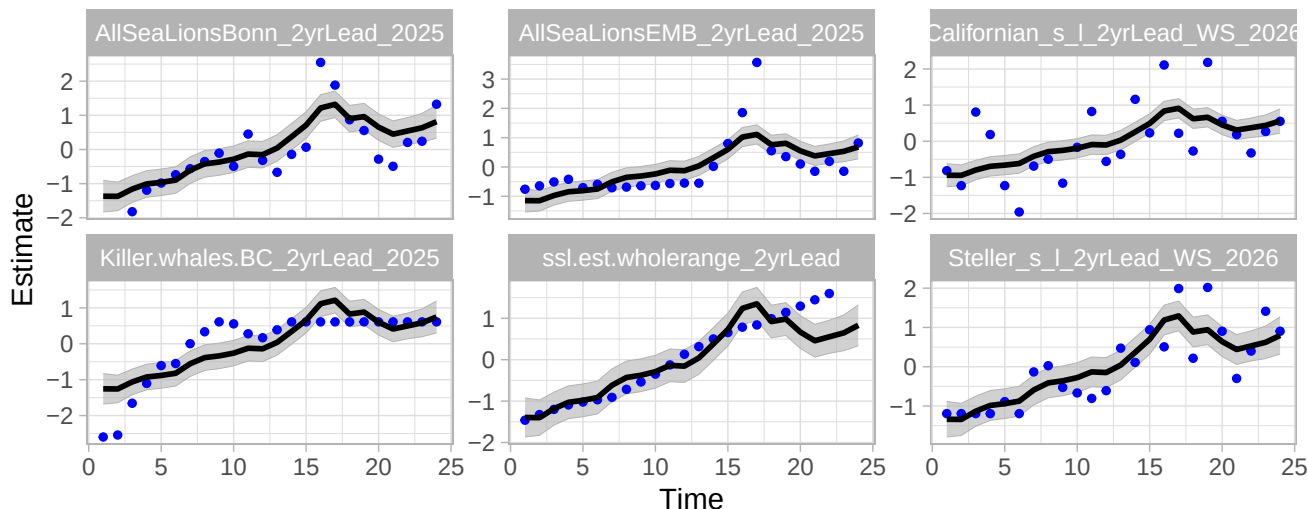


This is the model fitted value of Y conditioned on the data from $t=1$ to T . Use fitted.ytt1 if you want the one-step-ahead predictions instead. The CI is for the expected value of Y and the data points will not fall within the CI. Use prediction intervals to compare the data to intervals.

smoothed, guildSEMnode = PredAK, guild = 10.PredMammalNCC


Harbor_seal_CR_2yrLead_2025

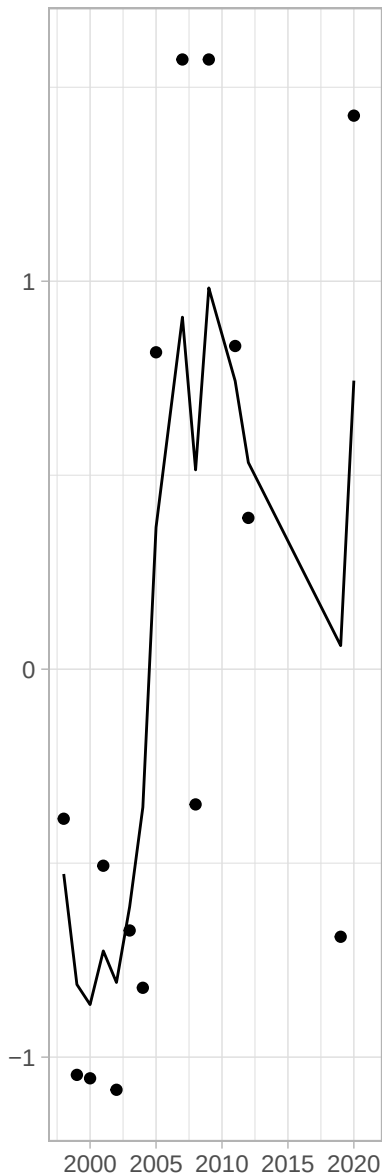


Harbour_s_2yrLead_WS_2026

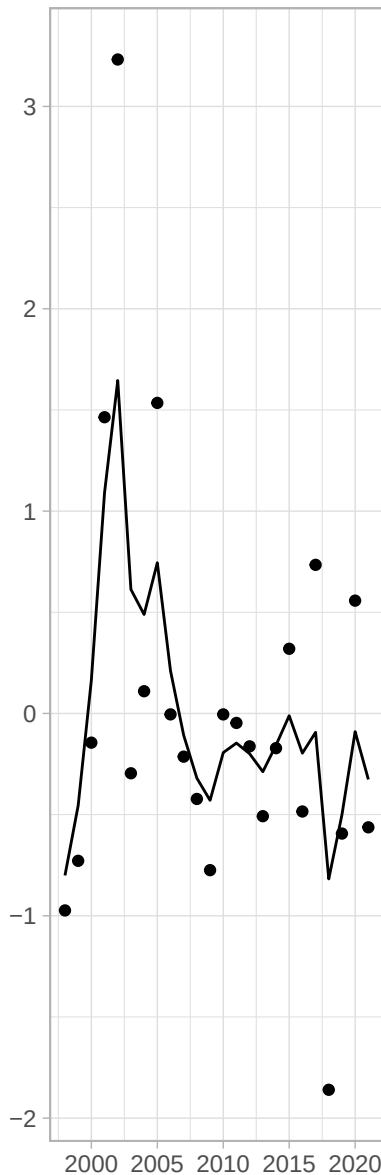

Northern_f_s_2yrLead_WS_2026

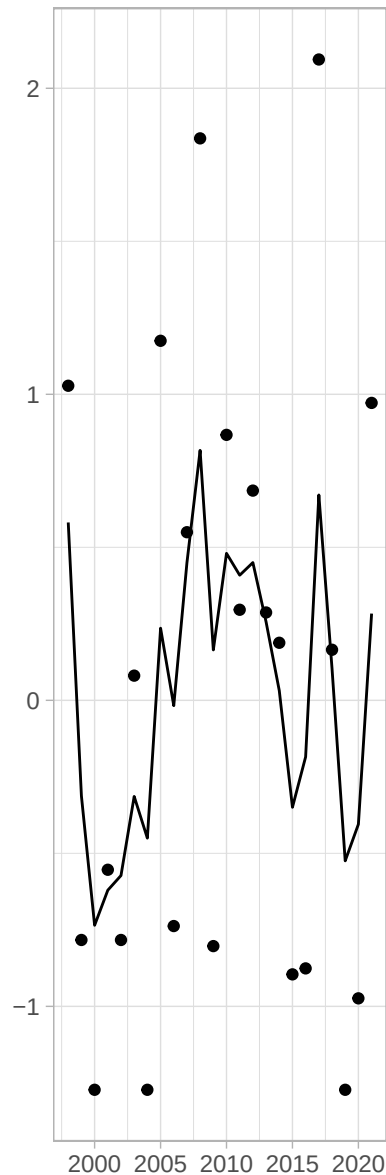


factors, guildSEMnode = PredNCC, guild = 11.PredMammalSmolt

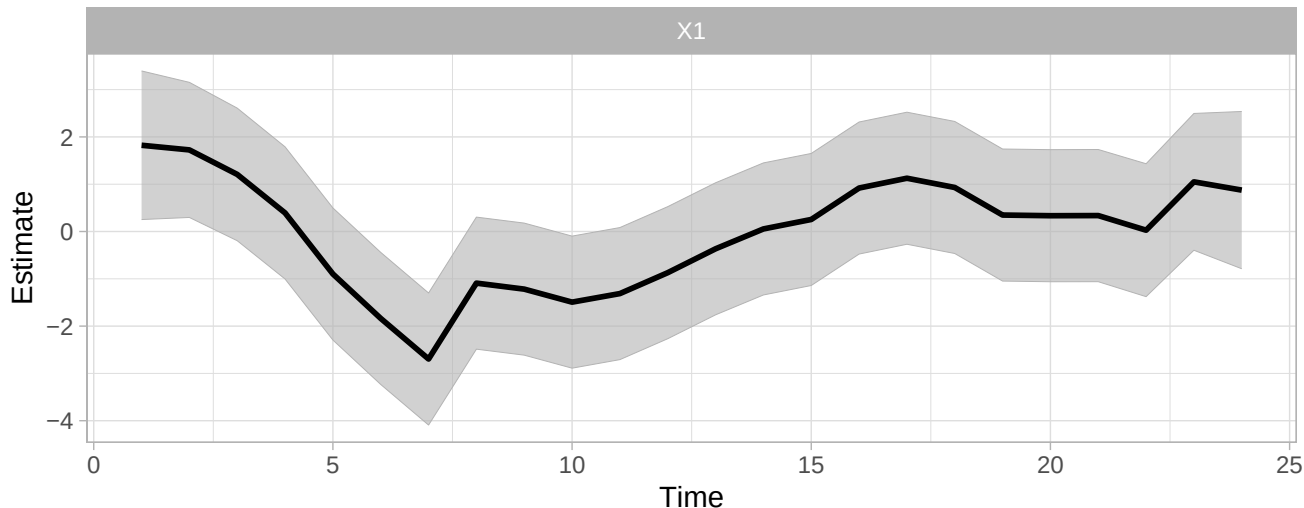

This is the estimate of X conditioned on the data from $t=1$ to T . Confidence intervals are for the expected value of X (conditioned on the data up to T).


expectation, guildSEMnode = PredNCC, guild = 11.PredMammalSmolt

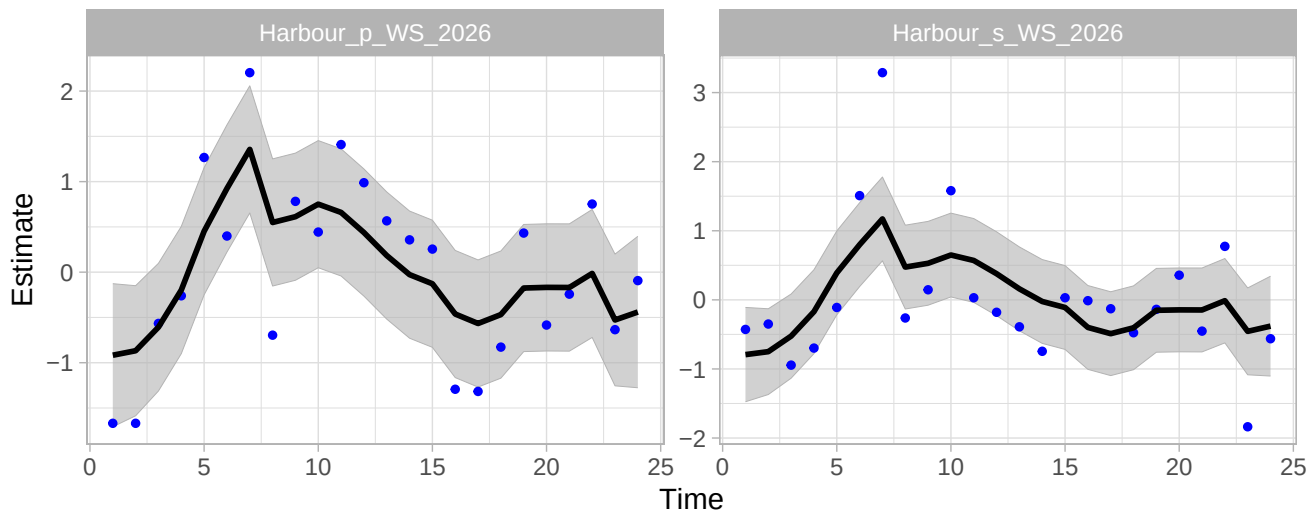


This is the model fitted value of Y conditioned on the data from $t=1$ to T . Use fitted.ytt1 if you want the one-step-ahead predictions instead. The CI is for the expected value of Y and the data points will not fall within the CI. Use prediction intervals to compare the data to intervals.

smoothed, guildSEMnode = PredNCC, guild = 11.PredMammalSmolt

Harbor_seal_CR_2025

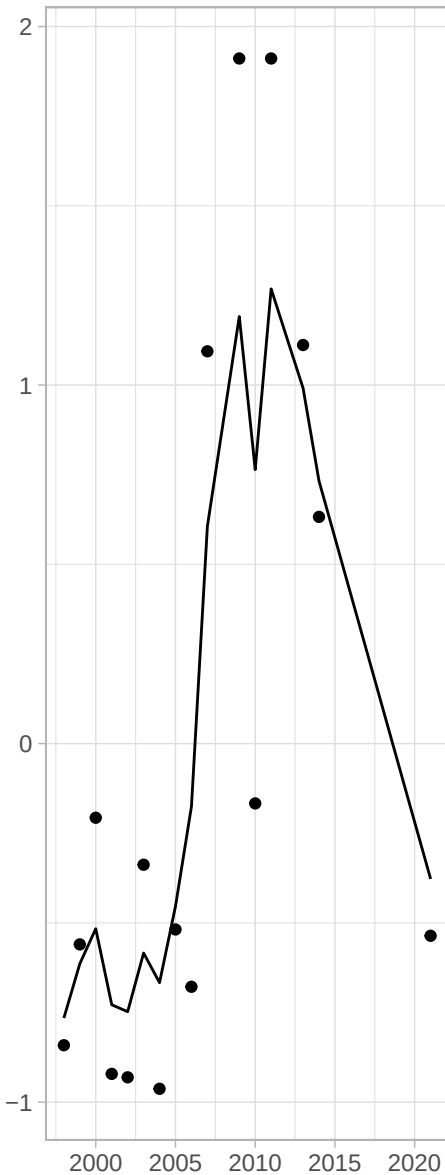


factors, guildSEMnode = PreyAK, guild = 12.ZooPreyAK

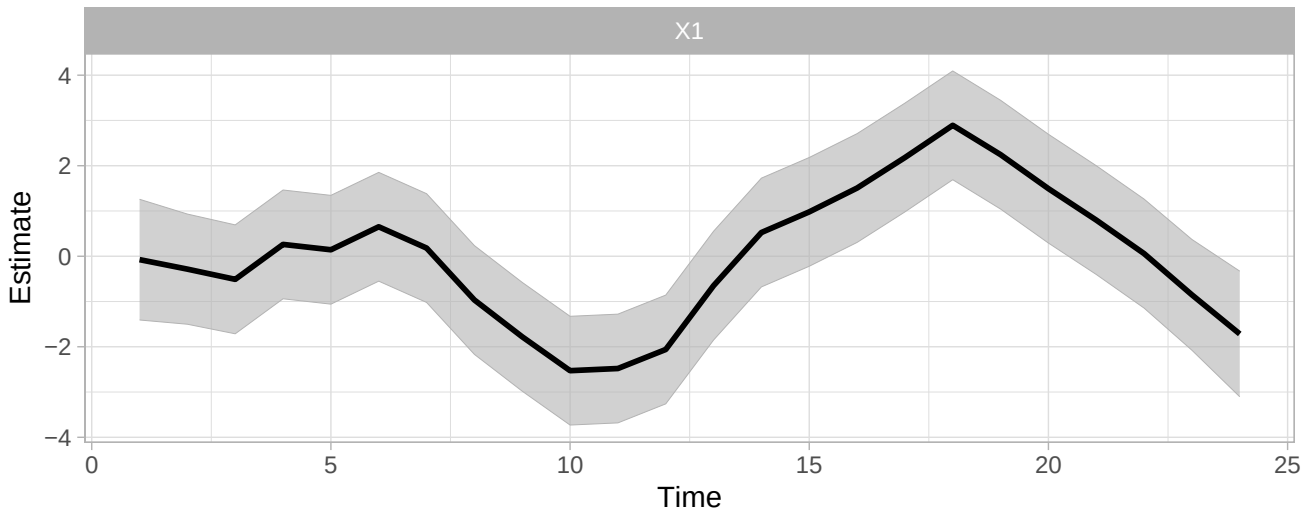

This is the estimate of X conditioned on the data from t=1 to T. Confidence intervals are for the expected value of X (conditioned on the data up to T).


expectation, guildSEMnode = PreyAK, guild = 12.ZooPreyAK

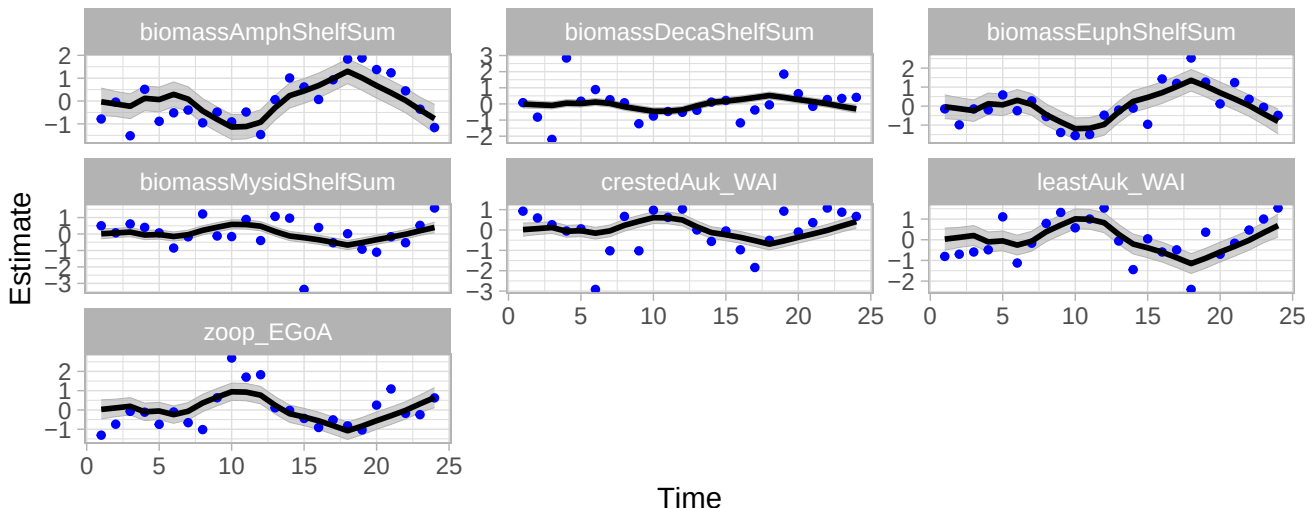


This is the model fitted value of Y conditioned on the data from t=1 to T. Use fitted.ytt1 if you want the one-step-ahead predictions instead. The CI is for the expected value of Y and the data points will not fall within the CI. Use prediction intervals to compare the data to intervals.

smoothed, guildSEMnode = PreyAK, guild = 12.ZooPreyAK


copepodBiomass_WGoA

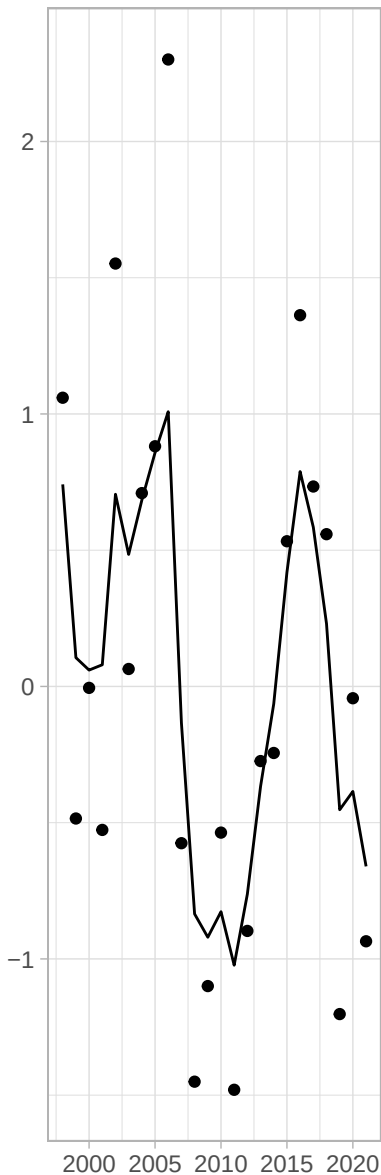


copepodCom_EGoA

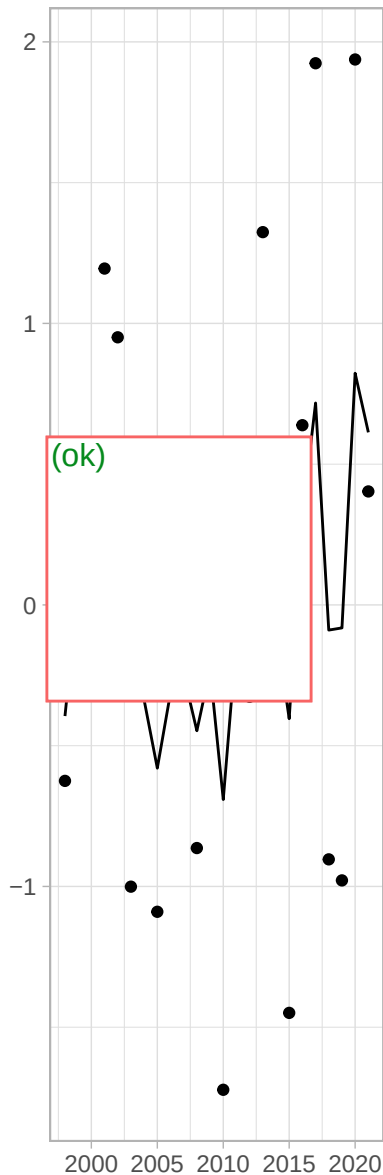

copepodCom_WGoA

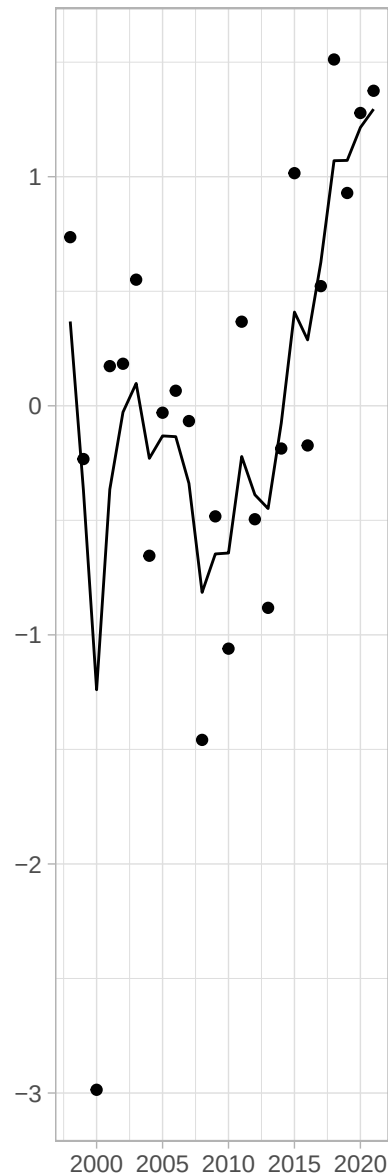


factors, guildSEMnode = PreyAK, guild = 13.FishPreyAK

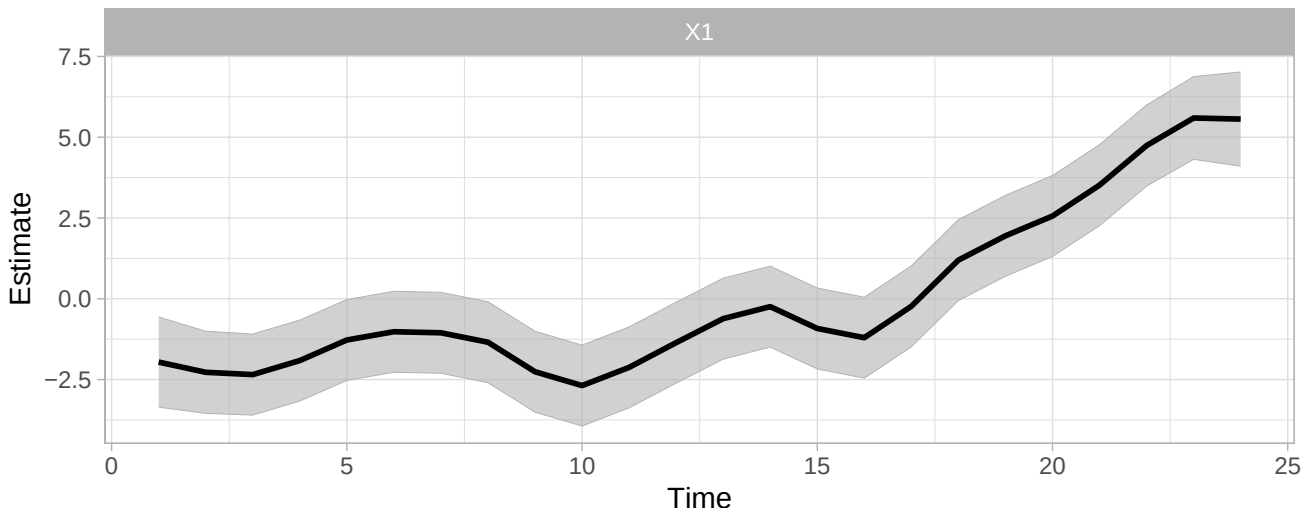

This is the estimate of X conditioned on the data from $t=1$ to T . Confidence intervals are for the expected value of X (conditioned on the data up to T).

expectation, guildSEMnode = PreyAK, guild = 13.FishPreyAK


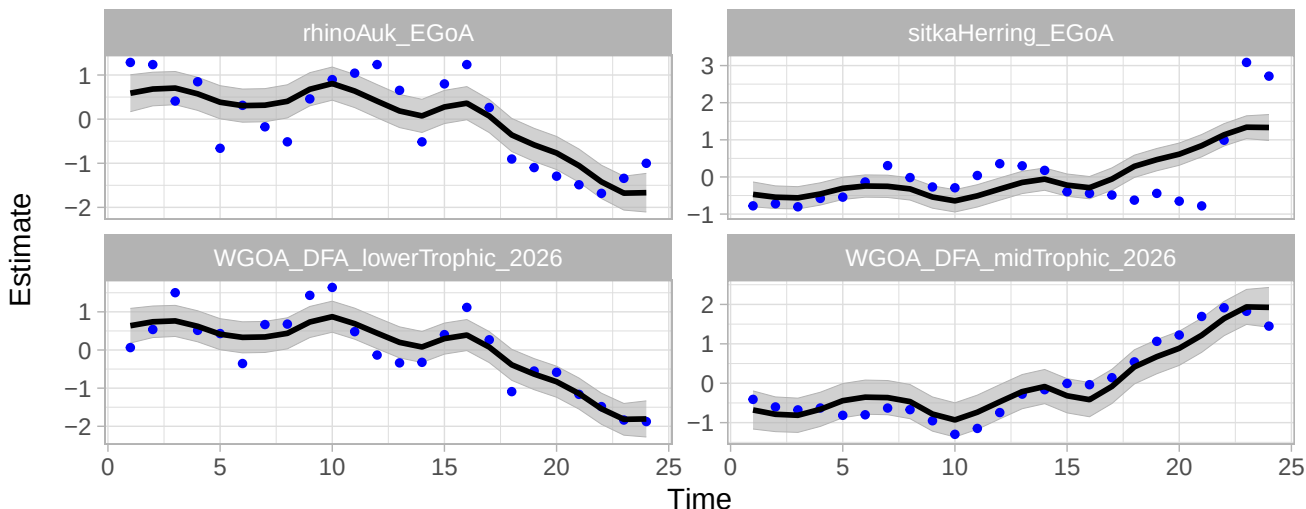


This is the model fitted value of Y conditioned on the data from $t=1$ to T . Use fitted.ytt1 if you want the one-step-ahead predictions instead. The CI is for the expected value of Y and the data points will not fall within the CI. Use prediction intervals to compare the data to intervals.


smoothed, guildSEMnode = PreyAK, guild = 13.FishPreyAK

estAbundHerringRecruits

WGOA_DFA_seabirds_2026

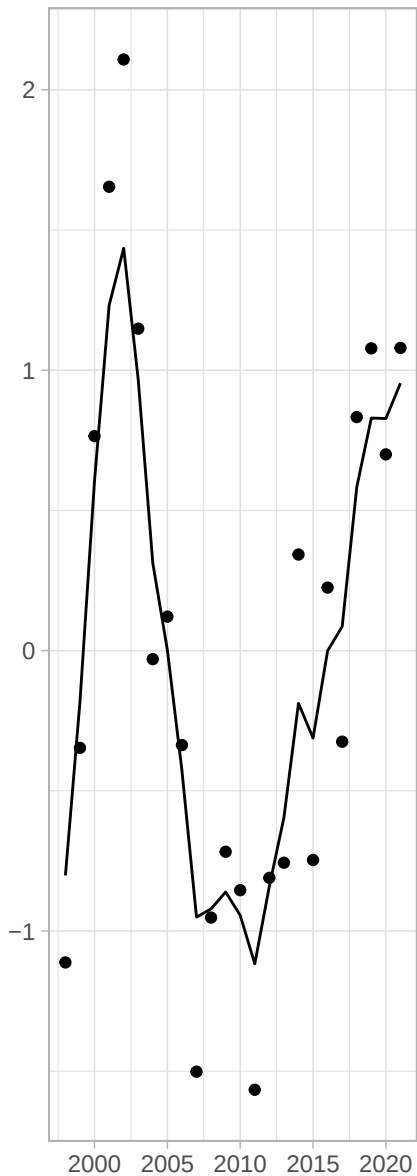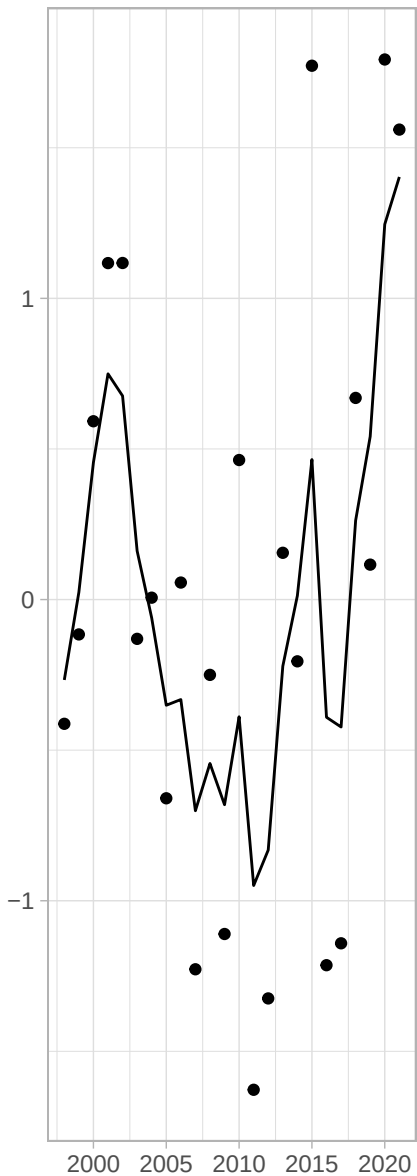


factors, guildSEMnode = PreyAK, guild = 13.FishPreyAK_b

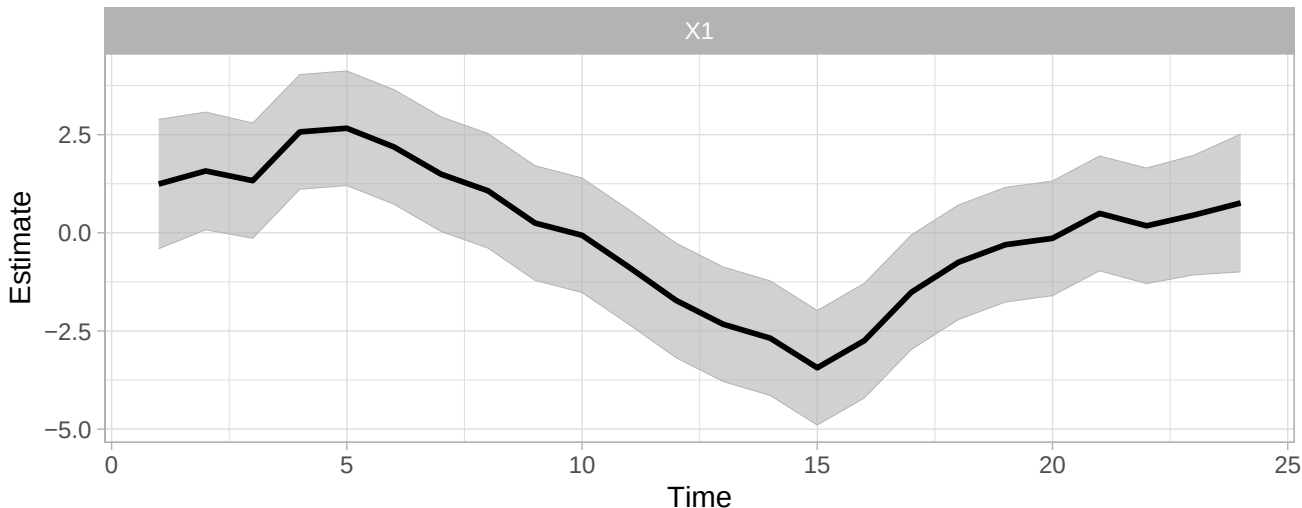


This is the estimate of X conditioned on the data from $t=1$ to T . Confidence intervals are for the expected value of X (conditioned on the data up to T).

expectation, guildSEMnode = PreyAK, guild = 13.FishPreyAK_b

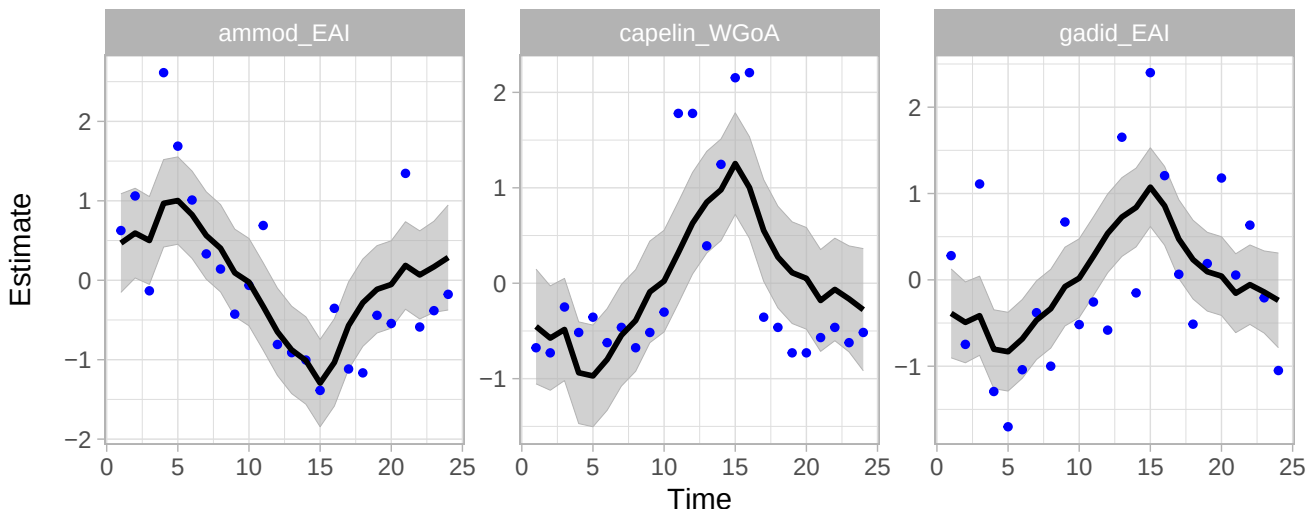


This is the model fitted value of Y conditioned on the data from $t=1$ to T . Use fitted.ytt1 if you want the one-step-ahead predictions instead. The CI is for the expected value of Y and the data points will not fall within the CI. Use prediction intervals to compare the data to intervals.

smoothed, guildSEMnode = PreyAK, guild = 13.FishPreyAK_b

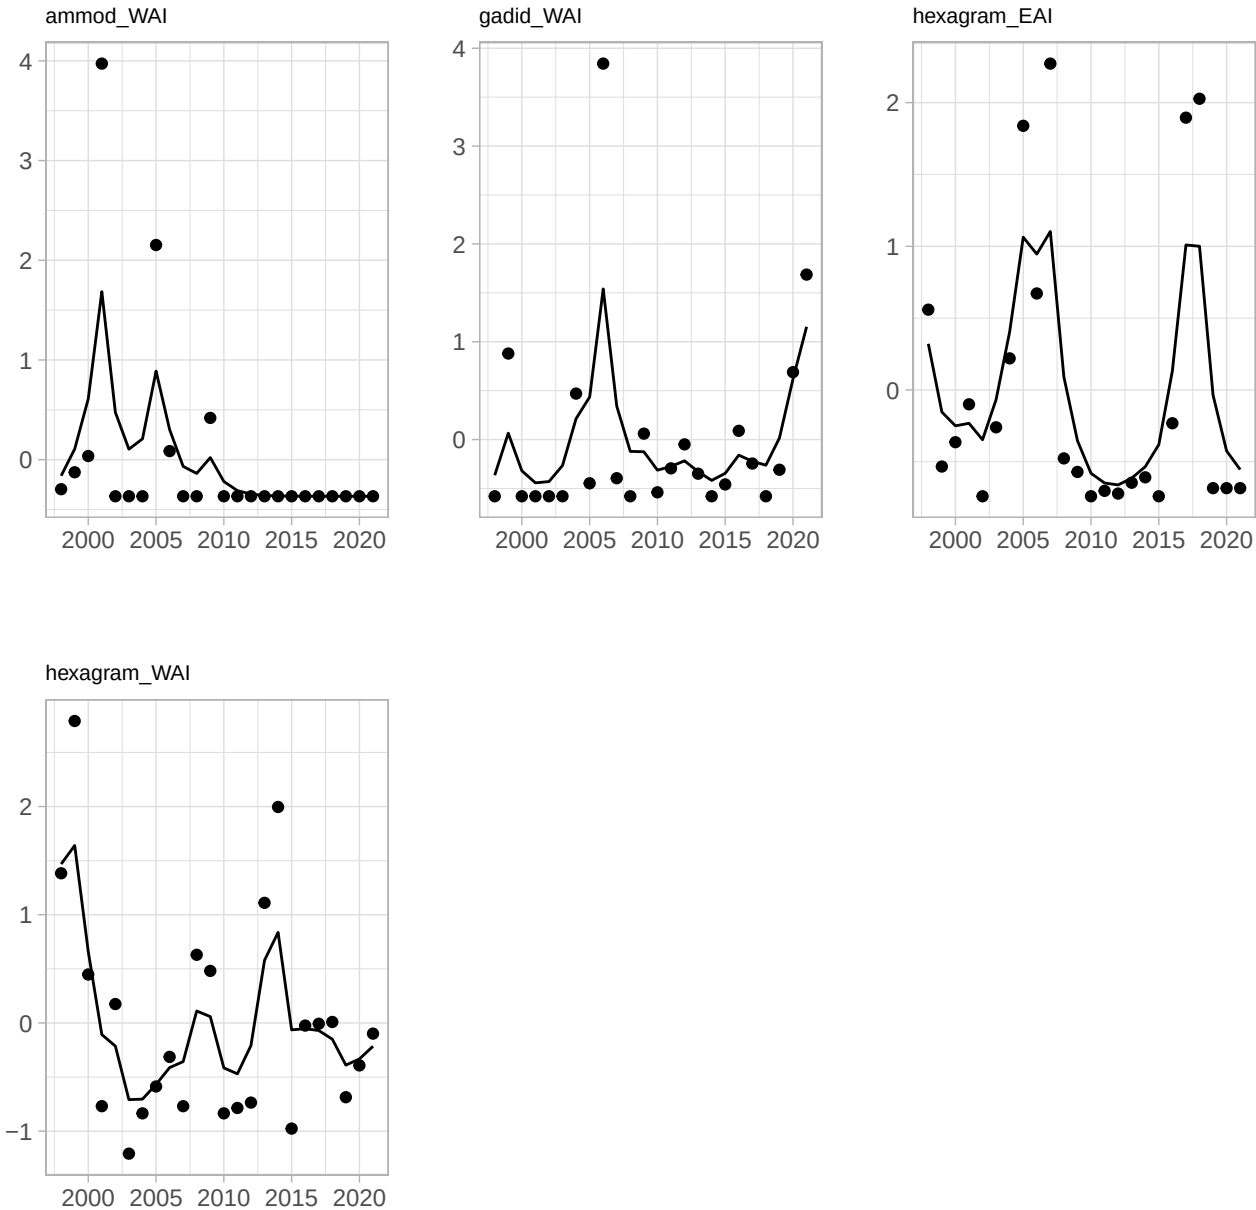


smoothed, guildSEMnode = PreyAK, guild = 14.CompAK


pinkSalmonAsia_2025

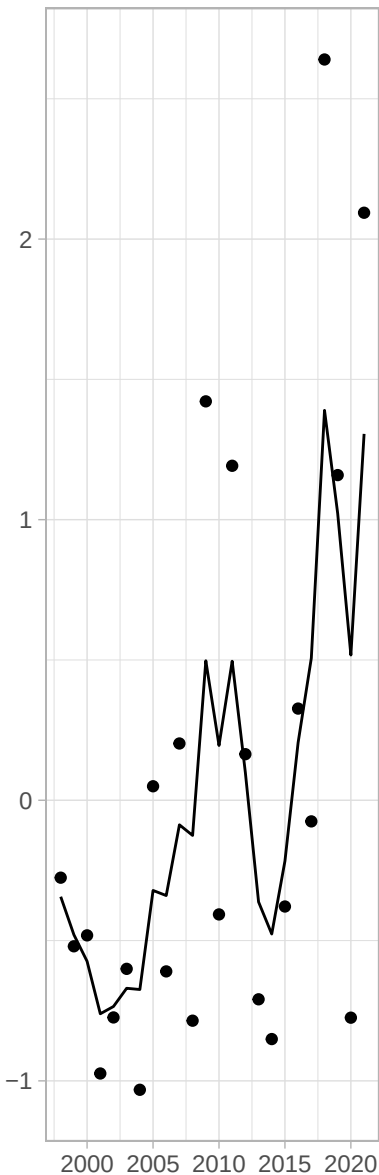


pinkSalmon_2025

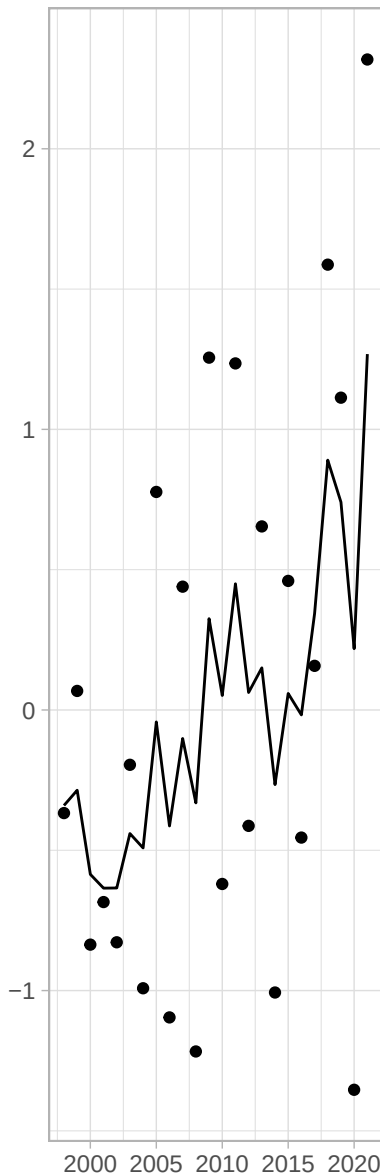

pinkSalmonNorthAmerica_2025

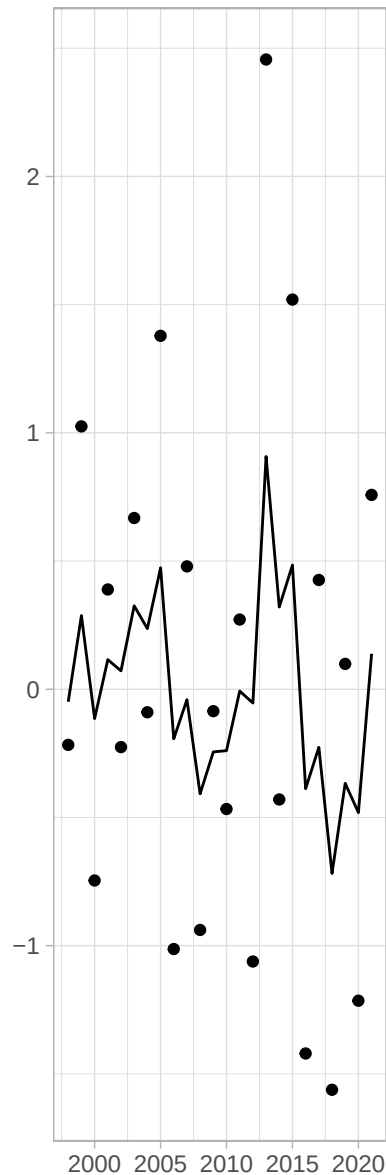


factors, guildSEMnode = SAR, guild = SAR

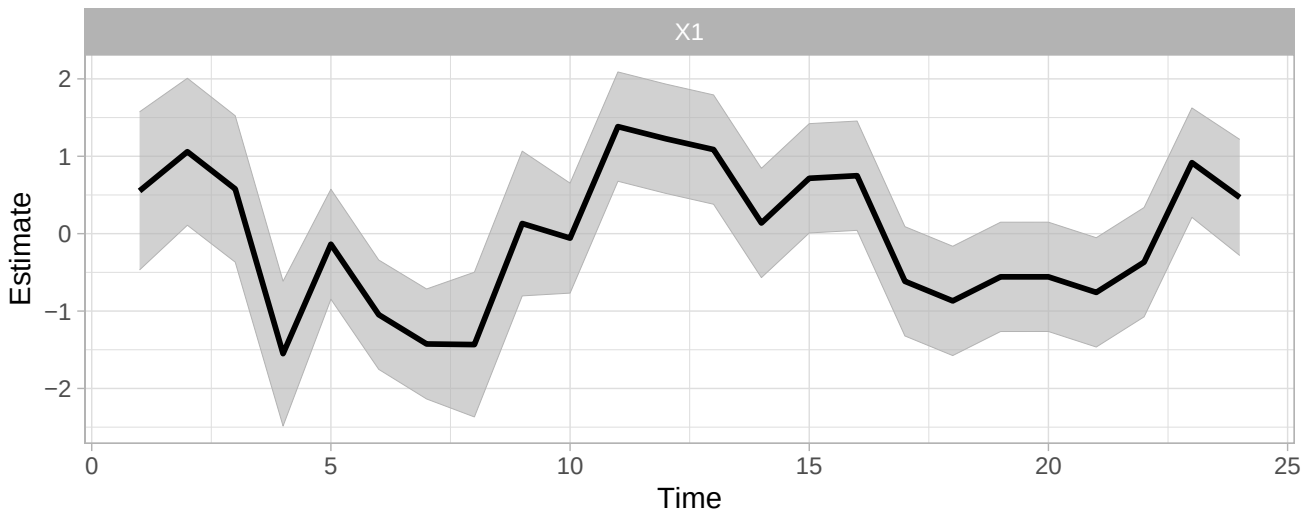


This is the estimate of X conditioned on the data from $t=1$ to T . Confidence intervals are for the expected value of X (conditioned on the data up to T).

expectation, guildSEMnode = SAR, guild = SAR

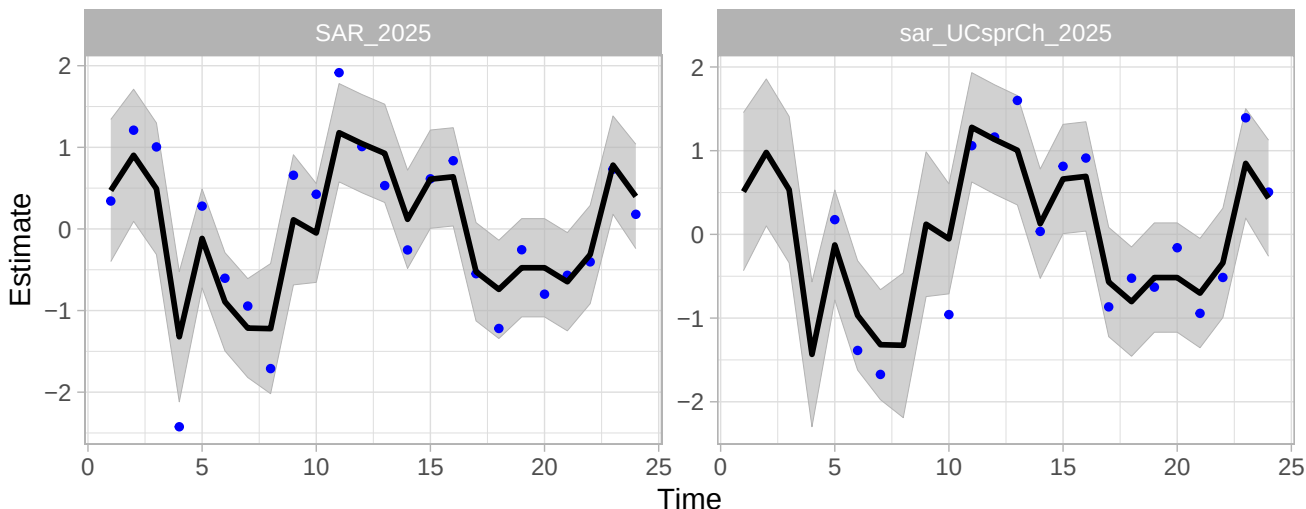


This is the model fitted value of Y conditioned on the data from $t=1$ to T . Use fitted.ytt1 if you want the one-step-ahead predictions instead. The CI is for the expected value of Y and the data points will not fall within the CI. Use prediction intervals to compare the data to intervals.


Guild splits

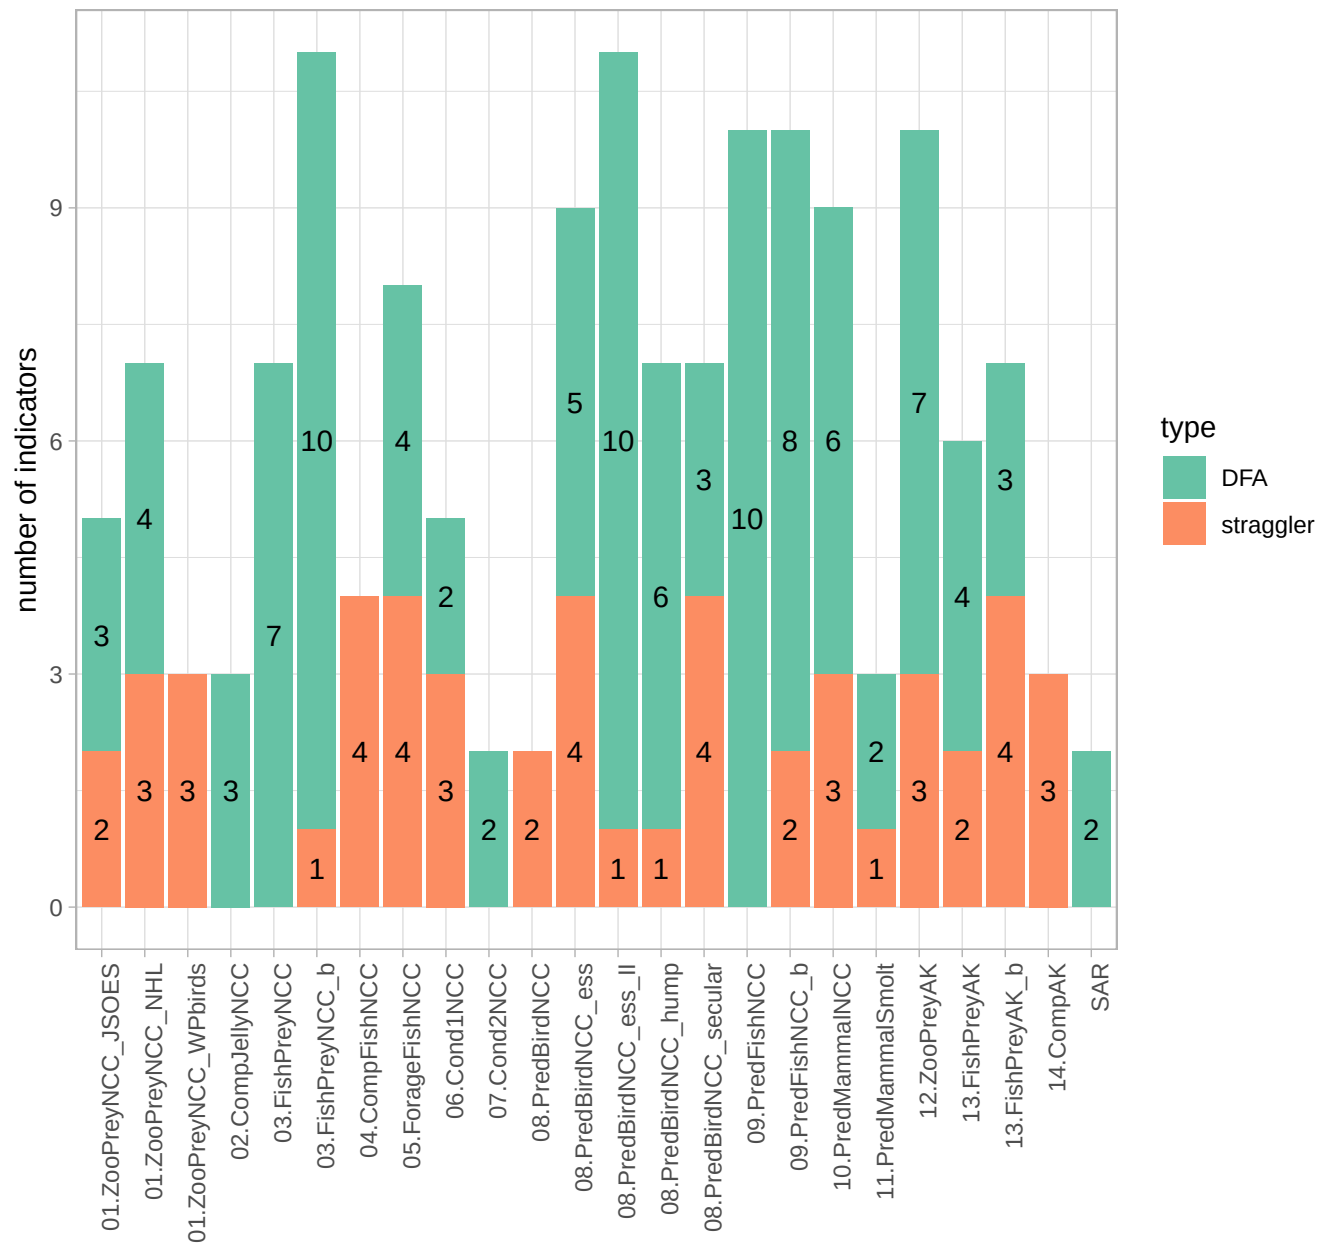


PreyNCC, 01.ZooPreyNCC_JSOES




PreyNCC, 01.ZooPreyNCC_NHL




PreyNCC, 02.CompJellyNCC




PreyNCC, 03.FishPreyNCC




PreyNCC, 03.FishPreyNCC




PreyNCC, 05.ForageFishNCC




Growth, 06.Cond1NCC




Abundance, 07.Cond2NCC




PredNCC, 08.PredBirdNCC_ess




PredNCC, 08.PredBirdNCC




PredNCC, 08.PredBirdNCC_hump




PredNCC, 08.PredBirdNCC_secular




PredNCC, 09.PredFishNCC




PredNCC, 09.PredFishNCC_b




PredAK, 10.PredMammal




PredNCC, 11.PredMammalSmolt




PreyAK, 12.ZooPreyAK



PreyAK, 13.FishPreyAK



PreyAK, 13.FishPreyAK_b



SAR, SAR

