
7 1	
	Name - Harshit Saini
	Section - K
	Roll no - 1918367
<u>Q2.</u>	
-	Open hit bash Type git config global user nome "Marshit"
7	
→ →	git config global wer email harshit sain 1815 (a) gmail
->	Prod
7	media Marshet Demo (make a disertory)
->	ed Harriet perso (shonge a dixetory)
-	Pwd
<b>-</b>	git enit
→	pwd
->	touch sample 1. +xt
	11 11 12+
	note pad sample text
->	git add.
	The state of the s
$\rightarrow$	git status
	A First Countit"
-	git commit -m" First commit"
	ALL AG

	DATE / / PAGE
	Name- Marchit Cai
	Name- Marshet Saeni Section - K
$\rightarrow$	git remate add origin - (copy gethat link)
->	git bronch -M main
->	git push -u oxigen main
$\rightarrow$	pwd
<b>→</b>	touch Sample 1. +x+
-)	touch sample 1. +x+
$\rightarrow$	git Status
	gu suus
$\rightarrow$	git add.
<b>→</b>	ait tatus
-	git status git commit -m "Sample Commit"
	git remak add oxigen (link)
-)	git branch -M maien
-	get publi -u oxigen main
=>	Your git sepo will be added to
	git hat.
	Scanned with CamScanner

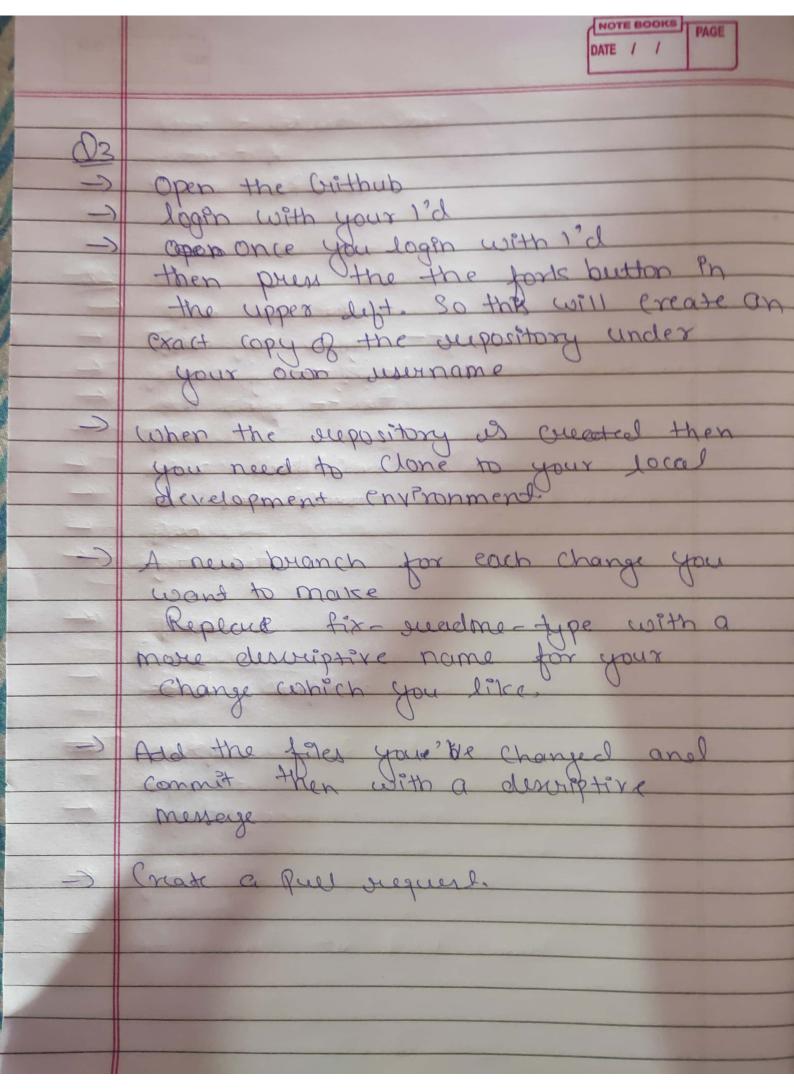

```
LAPTOP-3FEF4KEL MINGW64 ~/Desktop
remote add origin https://github.com/Harshitsaini12/Sample1
: not a git repository (or any of the parent directories): .git
LAPTOP-3FEF4KEL MENGW64 -/Desktop
config --global user.name"Harshit"
ALAPTOP-3FEF4KEL MINGW64 -/Desktop
t config --global user.email"harshitsaini1815@gmail.com"
@LAPTOP-3FEF4KEL MINGW64 ~/Desktop
t config -- list
.astextplain.textconv=astextplain
er.lfs.clean=git-lfs clean -- %f
er.lfs.smudge=git-lfs smudge -- %f
er.lfs.process=git-lfs filter-process
ter.lfs.required=true
p.sslbackend=openssl
p.sslcainfo=C:/Program Files/Git/mingw64/ssl/certs/ca-bundle.crt
e.autocrlf=true
e.fscache=true
e.symlinks=false
e.editor=notepad
1.rebase=false
edential.helper=manager-core
edential.https://dev.azure.com.usehttppath=true
it.defaultbranch=master
er.name=Harshit Saini
er.email=harshitsaini1815@gmail.com
er@LAPTOP-3FEF4KEL MINGW64 -/Desktop
ser@LAPTOP-3FEF4KEL MINGW64 ~/Desktop
ser@LAPTOP-3FEF4KEL MINGW64 -/Desktop
pwd
c/Users/user/Desktop
ser@LAPTOP-3FEF4KEL MINGWE4 -/Desktop
mkdir Samplel
USER@LAPTOP-3FEF4KEL MINGW64 -/Desktop
5 cd Samplel
```

Part out of everal event executed according

```
serGLAPTOP-3FEF4KEL MINGW64 -/Desktop
pwd
c/Users/user/Desktop
ser@LAPTOP-3FEF4KEL MINGM64 ~/Desktop
mkdir Samplel
ser@LAPTOP-3FEF4KEL MINGW64 -/Desktop
cd Samplel
ser@LAPTOP-3FEF4KEL MINGW64 -/Desktop/Sample1
pwd
c/Users/user/Desktop/Sample1
Ser@LAPTOP-3FEF4KEL MINGW64 -/Desktop/Sample1
git init
nitialized empty Git repository in C:/Users/user/Desktop/Sample1/.git/
ser@LAPTOP-3FEF4KEL MINGW64 ~/Desktop/Sample1 (master)
git remote add origin https://github.com/Harshitsaini12/Sample1
ser@LAPTOP-3FEF4KEL MINGW64 ~/Desktop/Sample1 (master)
git branch -M main
ser@LAPTOP-3FEF4KEL MINGW64 ~/Desktop/Sample1 (main)
git push -u origin main
rror: src refspec main does not match any
ser@LAPTOP-3FEF4KEL MINGW64 -/Desktop/Samplel (main)
touch sample1.txt
ser@LAPTOP-3FEF4KEL MINGW64 ~/Desktop/Sample1 (main)
notepad sample1.txt
ser@LAPTOP-3FEF4KEL MINGW64 -/Desktop/Sample1 (main)
oit add .
ser@LAPTOP-3FEF4KEL MINGW64 -/Desktop/Sample1 (main)
git status
n branch main
o commits yet
hanges to be committed:
(use "git rm --cached <file>..." to unstage)
      new file: sample1.txt
```

```
ser@LAPTOP-3FEF4KEL MINGW64 ~/Desktop/Sample1 (main)
git commit -m"First commit"
main (root-commit) 6eda552] First commit
1 file changed, 1 insertion(+)
create mode 100644 sample1.txt
ser@LAPTOP-3FEF4KEL MINGW64 -/Desktop/Sample1 (main)
git remote add origin https://github.com/Harshitsaini12/Sample1
rror: remote origin already exists.
ser@LAPTOP-3FEF4KEL MINGW64 -/Desktop/Sample1 (main)
git remote add origin https://github.com/Harshitsaini12/sample12
rror: remote origin already exists.
ser@LAPTOP-3FEF4KEL MINGW64 ~/Desktop/Sample1 (main)
git remote add origin https://github.com/Harshitsaini12/sample12
rror: remote origin already exists.
ser@LAPTOP-3FEF4KEL MINGW64 -/Desktop/Sample1 (main)
git remote add origin https://github.com/Harshitsaini12/harshit-demo
rror: remote origin already exists.
ser@LAPTOP-3FEF4KEL MINGW64 ~/Desktop/Sample1 (main)
oit branch -M main
serPLAPTOP-3FEF4KEL MINGW64 -/Desktop/Sample1 (main)
git push -u origin main
numerating objects: 3, done.
Counting objects: 100% (3/3), done.
riting objects: 100% (3/3), 260 bytes | 86.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0
To https://github.com/Harshitsaini12/Sample1
* [new branch]
                 main -> main
Branch 'main' set up to track remote branch 'main' from 'origin'.
ISET@LAPTOP-3FEF4KEL MINGW64 -/Desktop/Sample1 (main)
5 pwd
/c/Users/user/Desktop/Samplel
user@LAPTOP-3FEF4KEL MINGW64 ~/Desktop/Sample1 (main)
touch sample2.txt
user@LAPTOP-3FEF4KEL MINGW64 ~/Desktop/Sample1 (main)
notepad sample2.txt
user@LAPTOP-3FEF4KEL MINGW64 ~/Desktop/Sample1 (main)
$ git commit -
```

