# Retrospective reconstruction and numerical qualification of historical countermovement-jump recovery research: An artifact-bound case study

Author names and affiliations pending owner confirmation

Owner-review draft

**Short title:** A case study in jump recovery research

**Abstract**

This retrospective, artifact-bound case study asks how partially preserved historical machine-learning research can be reconstructed while distinguishing source-equivalent computation, compatibility with saved historical outputs, measurement authority, public reproducibility, and predictive validity. The archive supports eight historical scientific formulations and nine original neural model families. Public release-linked records identify their structures; original route qualification remains a privately recorded result. Those records report exact original-source central-processing-unit (CPU) equality for all 18 routes, while comparisons with saved graphics-processing-unit (GPU) arrays pass for M0–M3 and fail for both repeats of M4–M8 under the unchanged tolerance. This is not a public rerun of the original checkpoints or a successful replay of the historical GPU environment. Separately, we report an existing public synthetic benchmark with four reference models and three fixed evaluation roots from one generator. Mean six-cell normalized root-mean-square error (NRMSE) was 2.430659 for zero innovation, 1.036038 for the training mean, 0.736270 for ridge, and 0.773316 for the structured comparator. These descriptive synthetic results do not measure the original Gate7 models. Neither the synthetic benchmark nor numerical parity establishes athlete predictive validity, transportability, or clinical utility. No new training, inference, resampling, athlete-data acquisition, or empirical scoring was performed for this article.

**Keywords:** scientific machine learning; reproducible research; model reconstruction; countermovement jump; synthetic benchmark; numerical reproducibility

## 1 Introduction

Reconstructing a scientific machine-learning result requires more than locating executable source code. The result also depends on fitted state, feature ordering, preprocessing, target definition, split membership, runtime behavior, and aggregation. When these pieces are preserved separately or incompletely, a successful present-day run can answer a different question from the historical experiment. Goodman and colleagues describe reproducibility terminology as unsettled across fields; we therefore report the operation and evidence for each result instead of assigning one binary label [1]. The NeurIPS reproducibility program described by Pineau and colleagues combined code policy, a community challenge, and a submission checklist to improve prospective reporting and evaluation [2]. The present work applies those concerns retrospectively to one archive and does not claim that checklists or existing research infrastructure are absent [3].

Several established systems support prospective experiment capture and artifact identity. MLflow Tracking documents APIs for recording parameters, code versions, metrics, and output artifacts for runs; DVC documents experiment management alongside data, model, and pipeline versioning [4, 5]. Provenance and research-object standards address related needs: W3C PROV-O supplies a vocabulary for provenance entities and activities, while RO-Crate specifies packaging of research objects and their metadata [6, 7]. FAIR4RS describes findability, accessibility, interoperability, and reusability goals for research software [8]. These sources are complementary

prior work, not systems benchmarked in this study. We do not claim that they cannot represent historical records, restricted artifacts, or provenance. Our narrower task is to recover what this particular archive supports and label what remains incomplete, private, or unresolved; the V3 package is not itself a PROV-O implementation or an RO-Crate.

CMJ measurement contracts make the distinction between software and science concrete. Force-time outcomes depend on event boundaries and measurement procedures; they do not make force and impulse interchangeable outcomes [9, 10]. The historical and public synthetic tasks also have different horizons, targets, and evidence authority. The case-specific question is what can be authenticated from the preserved records without treating computational agreement as evidence of measurement validity or athlete prediction.

The case study distinguishes eight historical scientific formulations from nine original Gate7 neural model families, each with two candidate repeats. A separate, already recorded public synthetic reference-model study compares four non-Gate7 models across three horizons and two outcomes. Their target definitions, result authority, and reproducibility evidence differ.

**RQ1 — Historical reconstructability.** Which parts of the original research program can be authenticated and reconstructed, and which remain partial, rights-restricted, or unresolved?

**RQ2 — Numerical reproducibility.** Does recovering the original computation and obtaining source-equivalent CPU inference establish compatibility with saved historical GPU outputs?

**RQ3 — Scientific comparability.** What conclusions are supported by the public fixed-mode synthetic benchmark, and why do they not establish validity of the original native recovery models in athletes?

The contribution is a retrospective case study and engineering account, not a new universal provenance framework, neural-network algorithm, or validated athlete predictor. It shows how this archive's formulation identities, privately recorded route results, public synthetic receipts, and measurement contracts lead to different evidence judgments. An approach that binds claims to artifact identity and reports public regeneration separately from restricted qualification may be useful in other incomplete archives, but transferability has not been experimentally tested here.

## 2 Related work

### 2.1 Research reproducibility and machine-learning reporting

The NeurIPS reproducibility program reported by Pineau et al. combined a code submission policy, a community-wide reproducibility challenge, and a paper checklist [2]. Goodman et al. explain why disciplines use reproducibility and related terms inconsistently and caution against using them as proxies for truth [1]. We use operational descriptions here: public regeneration refers to calculations reproducible from the public package; private qualification refers to recorded checks whose underlying artifacts are not distributed; and scientific validity refers to evidence about the intended measurements and population. These labels prevent a recorded model execution from being presented as a public rerun or a predictive-validity study.

### 2.2 Experiment tracking, versioning, and provenance standards

MLflow Tracking documents run-level logging for parameters, code versions, metrics, and artifacts. DVC documents experiment management and versioning workflows for data and models [4, 5]. The PROV Ontology provides a standard vocabulary for representing provenance; RO-Crate defines a packaging specification for research objects, metadata, data, and workflows [6, 7]. FAIR4RS adapts the FAIR principles to research software [8, 11]. These infrastructures address adjacent problems and can be used to record historical material when it is available. We neither evaluate their capabilities nor claim that they cannot support retrospective recovery. The present package uses release-linked snapshots, checksums, and claim-to-evidence records for this case; it does not claim conformance to PROV-O or RO-Crate.

### 2.3 Artifact review and numerical compatibility

ACM's Artifact Review and Badging policy v1.1 separates artifact evaluation, public artifact availability, and results validation; functional and reusable artifacts are distinct evaluation levels [12]. The policy permits artifact evaluation to be separate from public availability, while its reproduced and replicated result labels distinguish whether author-supplied artifacts are used. We use a related separation of evidence questions, but this manuscript has not undergone ACM artifact review and carries no badge. Its private original-model checks are recorded qualification, not an independent public artifact evaluation. Floating-point literature shows why numerical comparison must be tied to a stated operation and tolerance; it does not identify the cause of the discrepancies in this archive [13, 14].

### 2.4 Measurement and simulation-study reporting

CMJ reporting literature emphasizes that selected force-time metrics and their measurement procedures should be explicit [9, 10]. TRIPOD-Cluster motivates transparent descriptions of clustered development and validation data [15], but its reporting guidance does not make synthetic camps equivalent to human cohorts. Morris, White, and Crowther propose the ADEMP structure—Aims, Data-generating mechanisms, Estimands, Methods, and Performance measures—for planning and reporting simulation studies [16]. We use ADEMP to describe the existing public synthetic experiment, not to claim a new simulation or to generalize beyond its generator. The ML test-score rubric concerns engineering practices and production readiness [17]; we cite it only to distinguish those questions from scientific validation and assign no readiness score.

## 3 Materials and methods

### 3.1 Study design and evidence scope

This work is a retrospective reconstruction and evidence synthesis. The scientific software identity is the published v1.1.0 release at commit 401f87aad1e4ef4108011fa0c1d769a24f1ad329. The original public synthetic-study receipts retain their own source and package identities; they are not rewritten as if they had been generated by the release commit. The public source manifest, receipt digests, claims register, and numerical summary are preserved with the manuscript package.

Model inventories, configuration links, checkpoint selection, fitted-transform digests, and numerical receipts were reconciled during private qualification. The release package contains only the public-safe summaries needed to describe those checks. Original checkpoints, fitted parameters, and restricted scientific records are not included. The route-level matrix therefore presents privately qualified evidence as a recorded result; it does not let a reader rerun inference against the private arrays.

The manuscript preparation performed no new training, model fitting, checkpoint inference, or empirical scoring. Figures use the frozen public results, receipt summaries, sanitized route records, and recorded methods. The prior qualification independently checked 306 RMSE-to-standard-deviation ratios and 51 root/cell aggregate identities. The six stored bootstrap summaries were retained rather than recomputed. Any additional arithmetic in this manuscript is limited to presentation of those recorded aggregates.

### 3.2 Historical scientific formulations

The archive records eight formulation identities with different response worlds, observation settings, horizons, and dispositions. A direct parent is shown only when it is explicitly present in the lineage record. The native camp formulation forecasts 72-hour (H72) and day-7 (D7) targets. The initial and canonical preseason formulations share an event-time adaptation world; canonicalization changes the sample and query surface. Rich-history camp recovery is a separate retired formulation with unresolved ancestry. The episode formulations start with a preliminary paired-trial observation contract, then a phase-consistent force-impulse measurement, followed by a correlated-exposure world. These episode tasks query 24-hour (H24), 48-hour (H48), and 72-hour (H72)

horizons. Threshold response is a proposed alternate. Fixed-mode discrepancy is an active candidate with mathematical 24-hour and 84-hour response modes; those time constants are not identified biological compartments.

Fig. 1 shows the recorded links and leaves unresolved parents open. The native camp task uses H72 and D7 targets. The episode formulations and the public synthetic benchmark use H24, H48, and H72 horizons. Shared outcome labels do not make their measurement laws, generators, or score definitions interchangeable.

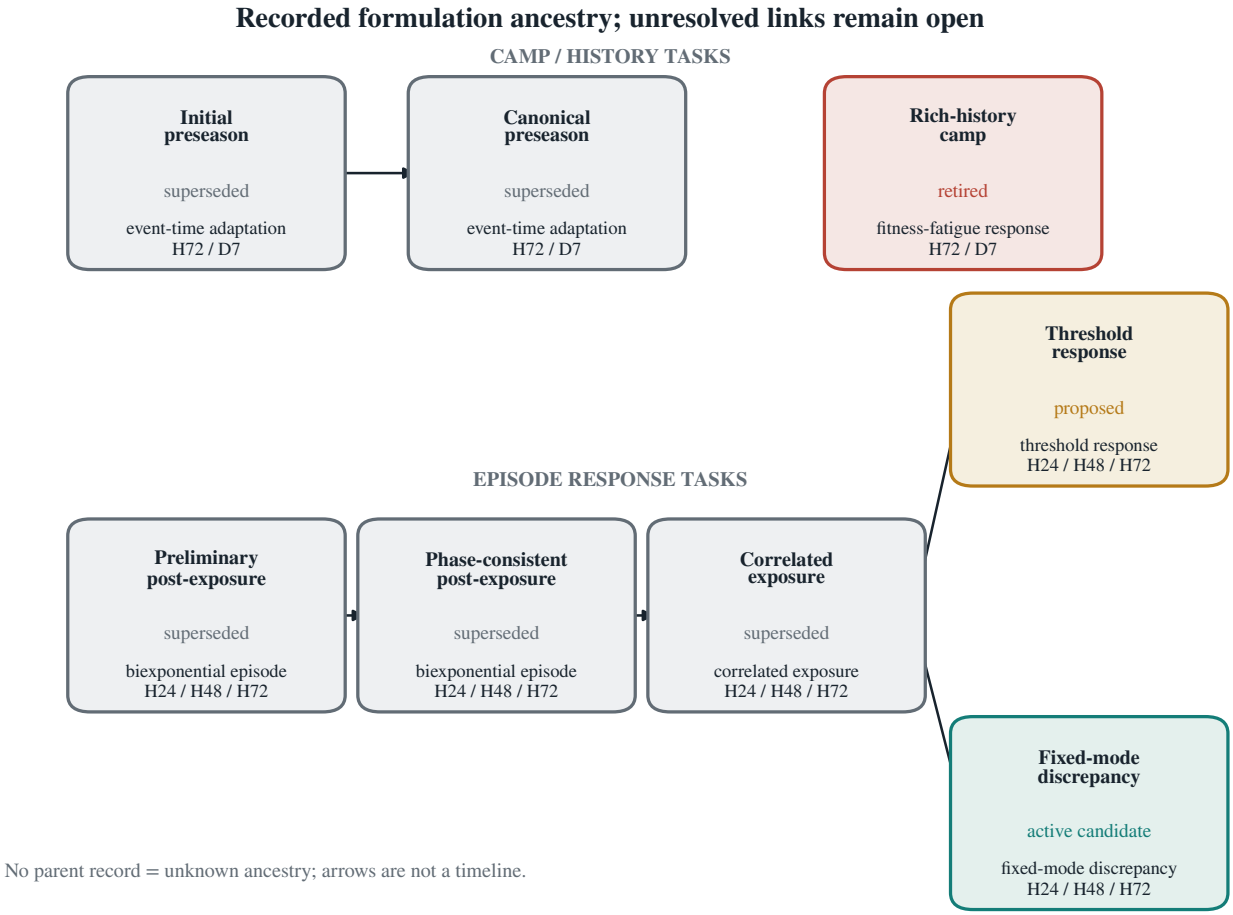



**Fig 1.** Scientific formulation genealogy. Each node is an authenticated formulation identity with its recorded disposition, response setting, observation contract, and horizon family. Arrows show only parent relations listed in the release-linked lineage register: initial preseason to canonical preseason, preliminary episode to phase-consistent episode to correlated exposure, and correlated exposure to two alternatives. No arrow is drawn for unresolved ancestry, including rich-history camp recovery and preliminary episode recovery. The diagram describes the archive, not a single linear history or an accepted physiological theory. Sources: S17 and S18.

Fig. 2 reports the synthetic-study split sizes; the three caller-supplied evaluation roots share one generator, and each episode's H24, H48, and H72 queries remain grouped.

### 3.3 Original neural model reconstruction

The original Gate7 inventory contains nine architecture families, M0–M8, with repeats r0 and r1. The recovered input contract contains 39 standardized raw predictors. M3 and later families also use four history records with four values each. M5 adds a two-entry horizon embedding with eight dimensions per entry. M6–M8 receive five schedule-derived basis values. The basis uses exposure durations normalized by 100 minutes, exponential time weights of 36 and 120 hours, and a saturating cumulative-dose transform $h(C) = 10C/(1 + C)$. It is a schedule feature, not a measured physiological state.

Original fitted preprocessing values were restored from authenticated configuration records in the private qualification process; they were not refit. Standardization preceded conversion to the neural network input type.

| Split | Camps | Episodes | Horizon rows |
|---|---|---|---|
| Training | 96 | 24,000 | 72,000 |
| Development | 16 | 4,000 | 12,000 |
| Evaluation root* | 16 | 4,000 | 12,000 |

*Three caller-supplied roots (A–C), each from the same generator. Each episode contributes H24, H48, and H72 queries kept together.

**Fig 2.** Sample structure of the existing public fixed-mode synthetic study. Counts are shown separately for camps, episodes, and horizon rows. Training contains 96 camps, 24,000 episodes, and 72,000 rows; development contains 16 camps, 4,000 episodes, and 12,000 rows; each of the three caller-supplied evaluation roots contains 16 camps, 4,000 episodes, and 12,000 rows. Each episode contributes H24, H48, and H72 queries that remain grouped. The roots share one generator and are not human cohorts. Sources: S01 and S02.

The model output is an additive innovation for force followed by net impulse, with an identity output transform. Adding the baseline is outside the inference adapter. The fitted parameter values and private checkpoint hashes are not published.

The five-value original schedule basis requires complete history and future-plan snapshots that were genuinely known at the forecast origin. The index exposure is included once in the known plan, not added a second time. The basis function reconstructs schedule features but cannot authenticate when an empirical future plan became available. A predetermined synthetic plan is not evidence of prospective availability in an athlete archive.

Table 1 summarizes the released architecture record and parameter counts for M0–M8. Both repeats share each family's listed architecture.

**Table 1.** Architecture contracts and parameter counts for the nine original Gate7 neural model families. Each family has two recorded repeats. Input counts and architecture descriptions are from the sanitized qualification record; original checkpoint weights are not distributed.

| Family | Additional inputs | Recorded architecture | Parameters |
|---|---|---|---|
| M0 | None | 39 → 32 → 2, exact GELU | 1,346 |
| M1 | None | 39 → 64 → 2, exact GELU | 2,690 |
| M2 | None | 39 → 64 → 64 → 2, exact GELU | 6,850 |
| M3 | Four-by-four history | Raw backbone and pointwise history encoder; mean/latest pooling; 128 → 2 head | 7,138 |
| M4 | Four-by-four history | Raw backbone and 4 → 32 gated recurrent unit; mean/latest pooling; 128 → 2 head | 10,626 |
| M5 | History and horizon | M4 with two-entry, eight-dimensional horizon embedding; 136 → 2 head | 10,658 |
| M6 | History, horizon, five basis values | M5 with first two basis values projected to 16 dimensions; 152 → 2 head | 10,738 |
| M7 | History, horizon, five basis values | M5 with all five basis values projected to 16 dimensions; 152 → 2 head | 10,786 |
| M8 | History, horizon, five basis values | M7 plus bias-free 5 → 2 linear basis head | 10,796 |

Fig. 3 shows the corresponding branches: M0–M2 are raw-feature feedforward networks of increasing width and depth; M3 encodes pointwise history and pools its mean and latest values; M4 substitutes a 32-unit gated

recurrent unit (GRU); and M5 adds a horizon embedding. M6 projects the first two basis components, M7 projects all five, and M8 adds a bias-free five-to-two linear basis head to its residual prediction.

**A Raw-feature feedforward backbones**

| | | |
|---|---|---|
| **M0** | 39 → 32 → 2 (exact GELU hidden layers) | 1,346 parameters |
| **M1** | 39 → 64 → 2 (exact GELU hidden layers) | 2,690 parameters |
| **M2** | 39 → 64 → 64 → 2 (exact GELU hidden layers) | 6,850 parameters |

**B History encoding**

| Family | History branch (four records × four values) | Pooling and output |
|---|---|---|
| **M3** | pointwise encoder | mean/latest pool + raw branch → 128 → 2 head |
| **M4** | gated recurrent unit, 4 → 32 | mean/latest pool + raw branch → 128 → 2 head |

**C Horizon and schedule-basis additions**

| | |
|---|---|
| **M5** | M4 + two-entry, eight-dimensional horizon embedding |
| **M6** | M5 + first two of five basis values projected to 16 |
| **M7** | M5 + all five basis values projected to 16 |
| **M8** | M7 + bias-free linear basis head (5 → 2), added to output |

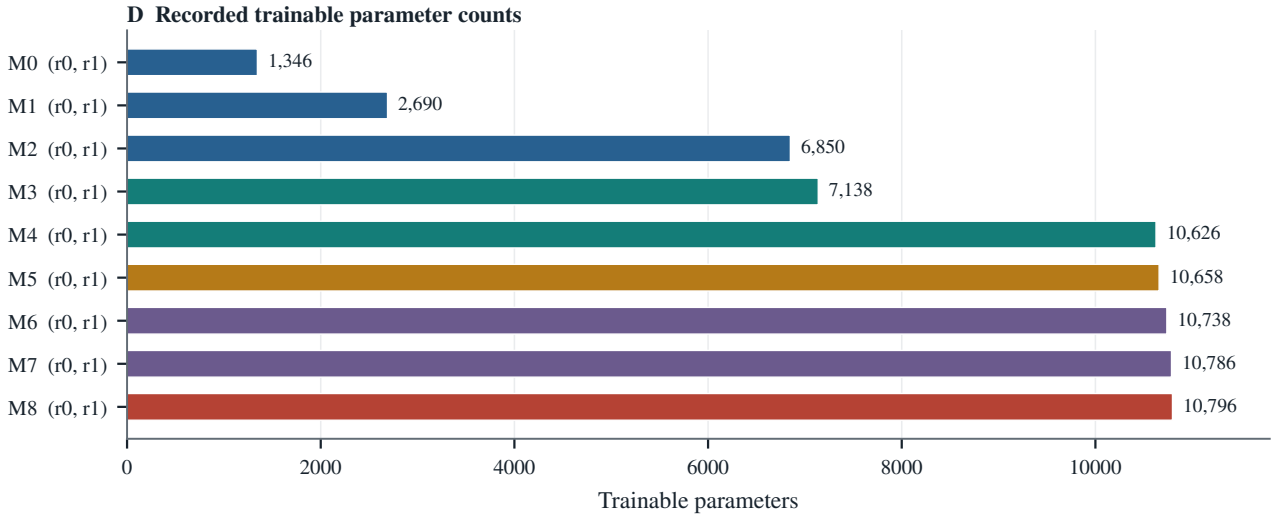



**Fig 3.** Original Gate7 architecture comparison. Panels summarize raw-feature feedforward widths (M0–M2), history encoding and pooling (M3–M4), horizon and schedule-basis additions (M5–M8), and recorded trainable parameter counts. Each family has two repeats with the same listed topology and count. M6 receives five basis values but projects only the first two; M7 projects all five; M8 adds a separate bias-free linear basis head. Counts are from the sanitized qualification record. The figure describes model structure, not predictive accuracy; fitted weights are not shown. Sources: S16 and the sanitized architecture table.

## 3.4 Numerical qualification

Qualification distinguishes recovered-source inference on a central processing unit (CPU) from comparison with saved historical outputs from a graphics processing unit (GPU) running the CUDA software stack. For each element, let $a_i$ be the replayed value and $b_i$ the preserved value. The unchanged historical acceptance rule is

$$|a_i - b_i| \le 10^{-5} + 10^{-4}\,|b_i|\,. \tag{1}$$

The original-source CPU comparison has a separate exact-array-equality requirement. The historical arrays contain 512 validation rows and two output columns (1,024 elements per route). The stored qualification used a

24-row synthetic fixture and the preserved 512-row validation fixture. A tolerance pass means every compared array element satisfied Eq. 1; it does not establish that the original GPU execution was replayed.

Fig. 4 shows the 18 model-repeat routes. Receipt records show exact output equality with the original CPU source for all 18. Comparisons to saved CUDA arrays pass for M0–M3 and fail for both repeats of M4–M8. The maximum absolute discrepancy is retained by route in the supplement. Because the outputs have different physical units, a maximum across the two columns is descriptive of array discrepancy only and must not be compared as a physical effect size. The records do not identify the cause of the CUDA failures.

**CPU source: 18/18 exact | Saved CUDA arrays: 8/18 pass, 10 fail**

| | Original-source CPU | Saved historical CUDA | Max \|difference\| (mixed output units) | Failing elements (of 1,024) |
|---|---|---|---|---|
| **M0-r0** | **Exact** | **Pass** | 1.431e-06 | 0 |
| M0-r1 | **Exact** | **Pass** | 1.431e-06 | 0 |
| **M1-r0** | **Exact** | **Pass** | 1.431e-06 | — |
| M1-r1 | **Exact** | **Pass** | 1.431e-06 | — |
| **M2-r0** | **Exact** | **Pass** | 1.907e-06 | — |
| M2-r1 | **Exact** | **Pass** | 1.907e-06 | — |
| **M3-r0** | **Exact** | **Pass** | 2.384e-06 | — |
| M3-r1 | **Exact** | **Pass** | 1.192e-06 | — |
| **M4-r0** | **Exact** | **Fail** | 4.759e-04 | 254 |
| M4-r1 | **Exact** | **Fail** | 3.264e-04 | 146 |
| **M5-r0** | **Exact** | **Fail** | 3.715e-04 | 443 |
| M5-r1 | **Exact** | **Fail** | 2.704e-04 | 206 |
| **M6-r0** | **Exact** | **Fail** | 1.993e-04 | 88 |
| M6-r1 | **Exact** | **Fail** | 2.793e-04 | 140 |
| **M7-r0** | **Exact** | **Fail** | 3.176e-04 | 163 |
| M7-r1 | **Exact** | **Fail** | 3.049e-04 | 198 |
| **M8-r0** | **Exact** | **Fail** | 2.213e-04 | 98 |
| M8-r1 | **Exact** | **Fail** | 3.042e-04 | 145 |

Saved-array rule: $|a - b| \leq 10^{-5} + 10^{-4}|b|$. A dash marks a failure count not tabulated in the receipt.

**Fig 4.** Numerical qualification for all 18 original model-repeat routes. Original-source CPU outputs are recorded as exactly equal for all routes. Saved historical CUDA-array comparisons pass for M0–M3 and fail for both repeats of M4–M8 under the unchanged elementwise tolerance. Maximum absolute differences and failing-element counts are shown where tabulated; a dash means a failure count was not tabulated. Each route compares 512 rows by two outputs. The outputs have different units, so maximum differences are not comparable across routes. These are receipt-backed comparisons, not a fresh GPU replay or an accuracy evaluation. Source: sanitized `model_identity_sanitized.csv`.

## 3.5 Native CMJ measurement and assessment construction

The native measurement contract defines force and impulse on one supplied vertical force trace $F_z(t)$, body-plus-system mass $m$, gravity $g$, concentric onset $t_{co}$, and takeoff $t_{to}$. Let $T = t_{to} - t_{co}$. Gross mean concentric

force per unit mass and gravity-adjusted net impulse per unit mass are

$$Y_F = \frac{1}{mT}\int_{t_{co}}^{t_{to}} F_z(t)\,\mathrm{d}t, \qquad [Y_F] = \mathrm{N\,kg^{-1}} = \mathrm{m\,s^{-2}}, \tag{2}$$

$$Y_J = \frac{1}{m}\int_{t_{co}}^{t_{to}} \left(F_z(t) - mg\right)\,\mathrm{d}t, \qquad [Y_J] = \mathrm{N\,s\,kg^{-1}} = \mathrm{m\,s^{-1}}. \tag{3}$$

The recorded implementation interpolates force linearly at event boundaries and applies the composite trapezoid rule over the closed concentric interval. Event detection, force calibration, mass authority, and trial validity are separate measurement requirements; the integrator does not infer those inputs.

Each native assessment is the arithmetic mean of exactly three distinct valid trials, not the best trial or median. For outcome $o$, define the baseline set $\mathcal{B}_i$ as the two latest distinct valid assessments in the inclusive interval from 24 to 240 hours before origin $i$. The baseline and target-relative innovation are

$$\bar{Y}_{i,0,o} = \frac{1}{2}\sum_{q\in\mathcal{B}_i} A_{q,o}, \qquad |\mathcal{B}_i| = 2, \tag{4}$$

$$\Delta Y_{i,h,o} = Y_{i,h,o} - \bar{Y}_{i,0,o}, \tag{5}$$

where $A_{q,o}$ is the three-trial assessment mean and $h$ is the forecast horizon. The native target windows are 66–78 hours for H72 and 156–180 hours for D7. These are native measurement and evaluation contracts, not an empirical evaluation performed for this article.

Fig. 5 separates the native baseline, H72 and D7 windows from the public synthetic H24, H48 and H72 queries. The native evaluation has four physical-unit cells; the synthetic experiment has six normalized-error cells. They are not combined.

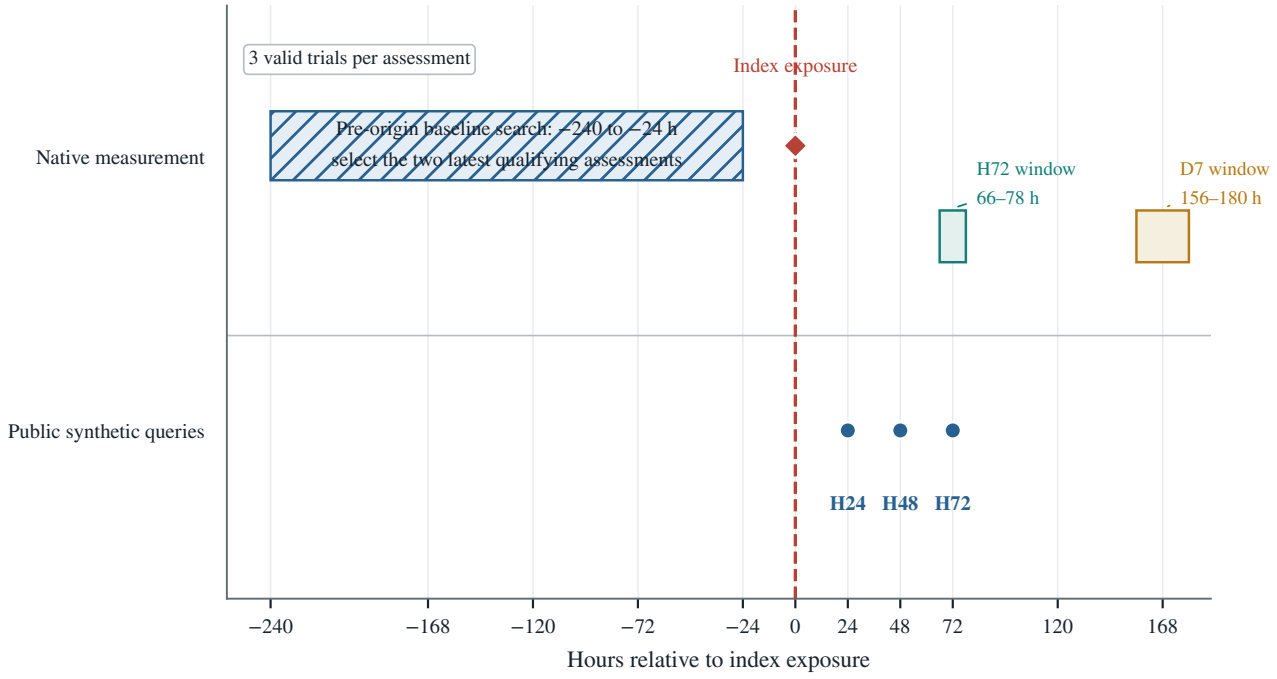



**Fig 5.** Assessment and recovery-horizon chronology. The upper track shows the native contract: a baseline search interval from 240 to 24 hours before origin, selection of the two latest qualifying assessments in that interval, an index exposure at origin, an H72 window at 66–78 hours, and a D7 window at 156–180 hours. Each assessment is constructed from exactly three valid trials. The lower track shows the separate public synthetic task's H24, H48, and H72 query horizons. The lower markers are nominal synthetic horizons, not native measurement windows. No athlete measurements are plotted. Sources: S02, S09, and S16.

Fig. 6 is an analytical measurement illustration rather than athlete data. It makes the gross force area and the signed area relative to body weight visually distinct. This distinction matters because Eq. 2 and Eq. 3 have

different units and answer different measurement questions.

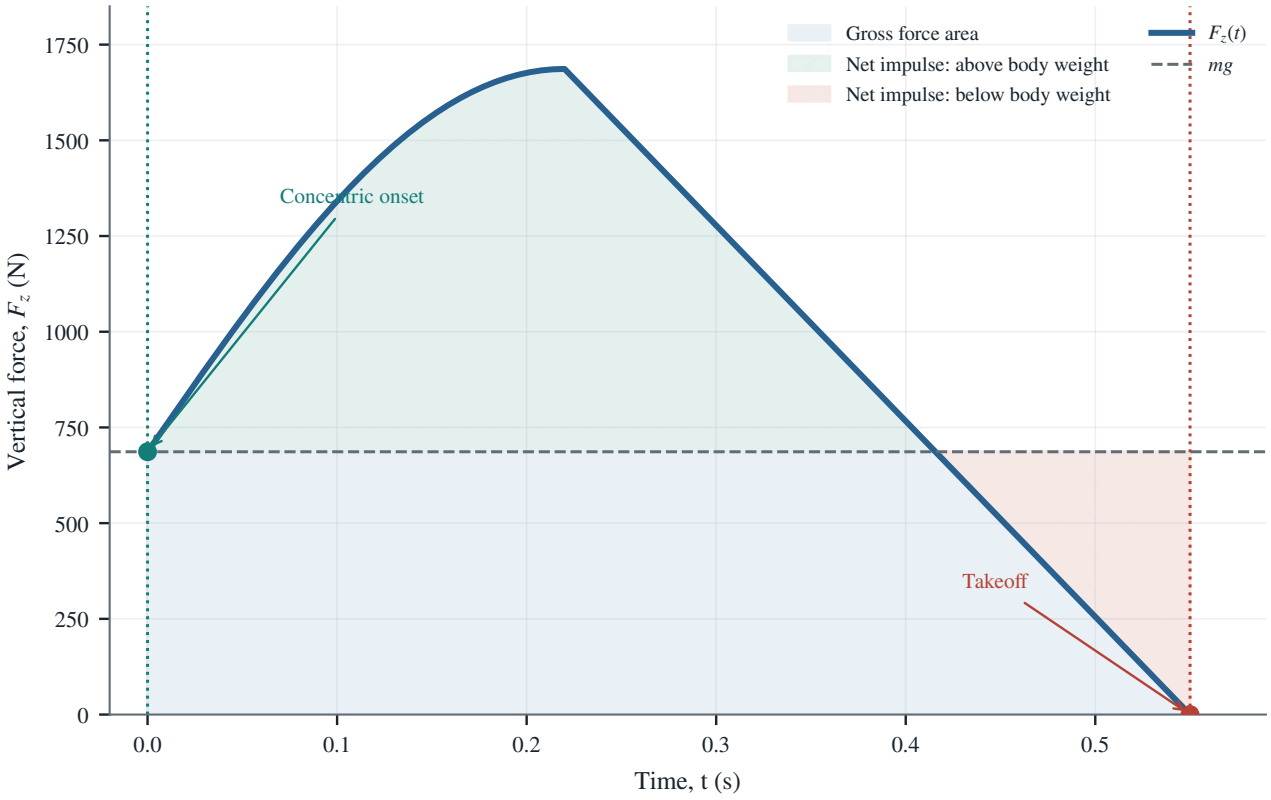



**Fig 6.** Analytical vertical force-time illustration, not observed athlete data. The displayed signal is generated with $m = 70\,\text{kg}$, $g = 9.806\,65\,\text{m/s}^2$, $A = 1000\,\text{N}$, peak time $t_p = 0.22\,\text{s}$, and $T = 0.55\,\text{s}$. For $0 \le t \le t_p$, $F_z(t) = mg + A\sin(\pi t/(2t_p))$; for $t_p < t \le T$, $F_z(t) = (mg + A)[1 - (t - t_p)/(T - t_p)]$. Concentric onset is $t = 0$, and takeoff is $t = T$. The area under $F_z$ defines gross mean force after division by $mT$; the signed area between $F_z$ and $mg$ defines net impulse after division by $m$. Units are N, kg, s, N/kg, and m/s as labeled.

### 3.6 Native evaluation and inferential rules

The native analysis contract reports four separate cells: force in $\text{N}\,\text{kg}^{-1}$ and net impulse in $\text{m}\,\text{s}^{-1}$, each at H72 and D7. Within a cell, query-weighted root-mean-square error (RMSE), mean absolute error (MAE), and signed bias are computed from prediction-minus-observation errors. Outcomes are not averaged across units. Repeats r0 and r1 are reported separately; the family summary is the arithmetic mean of the two repeat-level metrics, not an ensemble of their predictions.

For native uncertainty, the locked procedure resamples participant groups with replacement at least 10,000 times. A sampled participant contributes all of that participant's queries, origins, horizons, targets, candidates, repeats, and baselines. Paired comparisons share the same sampled participants. The resulting 95% percentile intervals are marginal, not simultaneous or predictive. The one-sided sign-flip test uses each independent participant's sum of zero-baseline squared error minus the mean squared error of the two model repeats. Its null requires independent clusters and a symmetric distribution of cluster loss differences. For at most 16 participants all $2^n$ sign allocations are enumerated; larger samples use a recorded sampled allocation scheme and plus-one Monte Carlo correction. Holm adjustment covers the four locked primary native cells.

No native athlete outcome analysis was performed here. The stored engineering rehearsal uses invented values only. With six strictly positive simulated participant improvements, the smallest exact one-sided probability is $1/64 = 0.015625$; across four primary cells its Holm-adjusted value is $4/64 = 0.0625$. This rehearsal correctly cannot meet a 0.05 family-wise threshold and is not evidence about athletes or any recovered checkpoint.

## 3.7 Public synthetic benchmark design reported with ADEMP

### 3.7.1 Aims

The existing public fixed-mode study provides a descriptive comparison of four prespecified reference models for baseline-relative force and net-impulse innovations. Its target is performance on fixed generated test roots from the registered synthetic world. It is not an experiment on the original Gate7 neural families or on athlete outcomes.

### 3.7.2 Data-generating mechanisms

The study uses the public `fixed_mode_discrepancy_world` generator. Training contains 96 camps, 24,000 episodes, and 72,000 horizon rows. Development contains 16 camps, 4,000 episodes, and 12,000 rows. Each of three caller-supplied evaluation roots uses a separate 16-camp, 4,000-episode, 12,000-row public-validation stream from the same generator. Each camp contributes 250 episodes; each episode contributes H24, H48, and H72 queries that remain together. Participant, episode, query, and camp identities are checked for split separation. Group keys, labels, future target-time fields, and oracle states are excluded from predictors. The roots are fixed generator outputs, not independent human populations.

### 3.7.3 Estimand and methods

For each fixed evaluation root, the study target is the descriptive mean NRMSE over its six outcome-horizon cells. The four reference models are zero innovation, a training-only outcome-by-horizon mean, cellwise ridge regression, and a structured comparator. The public predictor schema has 82 source fields; one-hot horizon encoding produces 84 numeric columns. Numeric preprocessing uses training-only means and population standard deviations, with zero scales set to one. The structured comparator uses public exposure primitives, observed context, observed prior innovations, and fixed 24-hour and 84-hour mathematical modes; it excludes hidden effects and oracle states.

Ridge and structured regularization were selected on development six-cell mean NRMSE from the frozen grid $\{0.01, 0.1, 1, 10, 100\}$, with lower alpha breaking ties. All full-data selections chose the lower grid boundary, $\alpha = 0.01$. This is a property of the existing study, not a reason to adjust its test results. The nested sample-size diagnostic uses 24, 48, and 96 camps from one recorded seeded permutation and holds the full-data-selected hyperparameter fixed. The force outcome's registered cell key is relative_peak_mean_force_innovation; the source maps it to label.relative_mean_concentric_force_innovation. These are preserved as a key/field mapping, not as a link to the native H72/D7 experiment.

### 3.7.4 Performance measures

For model $m$, outcome-horizon cell $c$, and $n_c$ rows, the registered normalized root-mean-square error (NRMSE) is calculated as follows:

$$\mathrm{RMSE}_{m,c} = \sqrt{\frac{1}{n_c}\sum_{j=1}^{n_c}(\hat{y}_{m,c,j} - y_{c,j})^2}, \tag{6}$$

$$\mathrm{NRMSE}_{m,c} = \frac{\mathrm{RMSE}_{m,c}}{\mathrm{SD}_{\mathrm{pop}}(y_c)}, \qquad \mathrm{SD}_{\mathrm{pop}}(y_c) = \sqrt{\frac{1}{n_c}\sum_{j=1}^{n_c}(y_{c,j} - \bar{y}_c)^2}, \tag{7}$$

$$S_m = \frac{1}{6}\sum_{c=1}^{6}\mathrm{NRMSE}_{m,c}\,. \tag{8}$$

The six cells are formed by three horizons and two outcomes. Each cell is normalized separately before equal-weight averaging, so the score is dimensionless and does not pool force and impulse in their raw units. Every

registered cell has at least two rows and nonzero population standard deviation. $1 - S_m$ is a descriptive research-progress transformation in the receipt; it is not a recovery score or a clinical threshold. The manuscript reports existing receipt values and does not repeat training, model selection, inference, or scoring.

### 3.8 Statistical summaries

The reported root-level variation is the sample standard deviation across the three evaluation roots. It describes those fixed generated roots; it is not a confidence interval for a real athlete population. The existing receipt also stores 5,000 paired whole-camp bootstrap replicates per root, using NumPy PCG64 with seed 49,505,000. Each draw resamples 16 camps, retaining all 250 episodes and three horizon queries for each selected camp. The bootstrap is paired between each model and zero innovation. Percentile endpoints are copied from the stored summary; no new bootstrap is computed.

The stored bootstrap intervals support within-root model-versus-zero comparisons for ridge and the structured comparator. They do not provide a ridge-versus-structured interval. Separate marginal intervals cannot be combined to manufacture that comparison.

## 4 Results

### 4.1 RQ1 — Historical reconstructability

The archive supports eight distinct formulation identities and nine Gate7 architecture families, but it does not support a complete historical replay. Five direct parent links are recorded and three identities retain unresolved direct ancestry (Fig. 1). The rich-history formulation remains separate from the preseason and episode chains. The threshold formulation is proposed, while fixed-mode discrepancy is an active candidate; neither status is inferred from the synthetic reference-model ranking. Public release-linked files support the formulation and architecture descriptions. Original fitted checkpoints, fitted preprocessing values, and route-level execution evidence remain restricted; the exact CPU and saved-CUDA qualification is reported from a privately recorded, sanitized result.

Nine neural model families and 18 repeats were represented in the architecture qualification record. Parameter counts range from 1,346 in M0 to 10,796 in M8 (Table 1). The sequence of model changes includes feedforward depth and width, explicit history encoding, horizon conditioning, basis projection, and an additive linear basis head. These recovered topology differences do not by themselves establish which architecture predicts native H72/D7 outcomes better.

### 4.2 RQ2 — Numerical reproducibility

**Exact original-source CPU equality is recorded for all 18/18 model-repeat routes. Under the unchanged tolerance, saved historical CUDA-array comparisons pass for 8/18 routes (M0–M3) and fail for 10/18 (both repeats of M4–M8; Fig. 4).** The two M8 routes have recorded maximum absolute discrepancies of $2.21 \times 10^{-4}$ and $3.04 \times 10^{-4}$, with 98 and 145 failing elements out of 1,024, respectively. Across the failed families, recorded failure counts range from 88 to 443 elements per route. An external reader can inspect the public sanitized summary and arithmetic checks, but cannot independently rerun the original checkpoint inference from this package.

These findings qualify source-level CPU inference and identify a negative historical-runtime comparison. They do not establish a successful original GPU replay or determine whether precision mode, kernel behavior, or another runtime factor caused the discrepancies. The saved arrays' two output columns have different physical units; their pooled maximum absolute error is not a meaningful physical comparison across routes. No saved-array failure is hidden by changing the threshold.

## 4.3 RQ3 — Scientific comparability

The recorded six-cell results appear in Fig. 7.

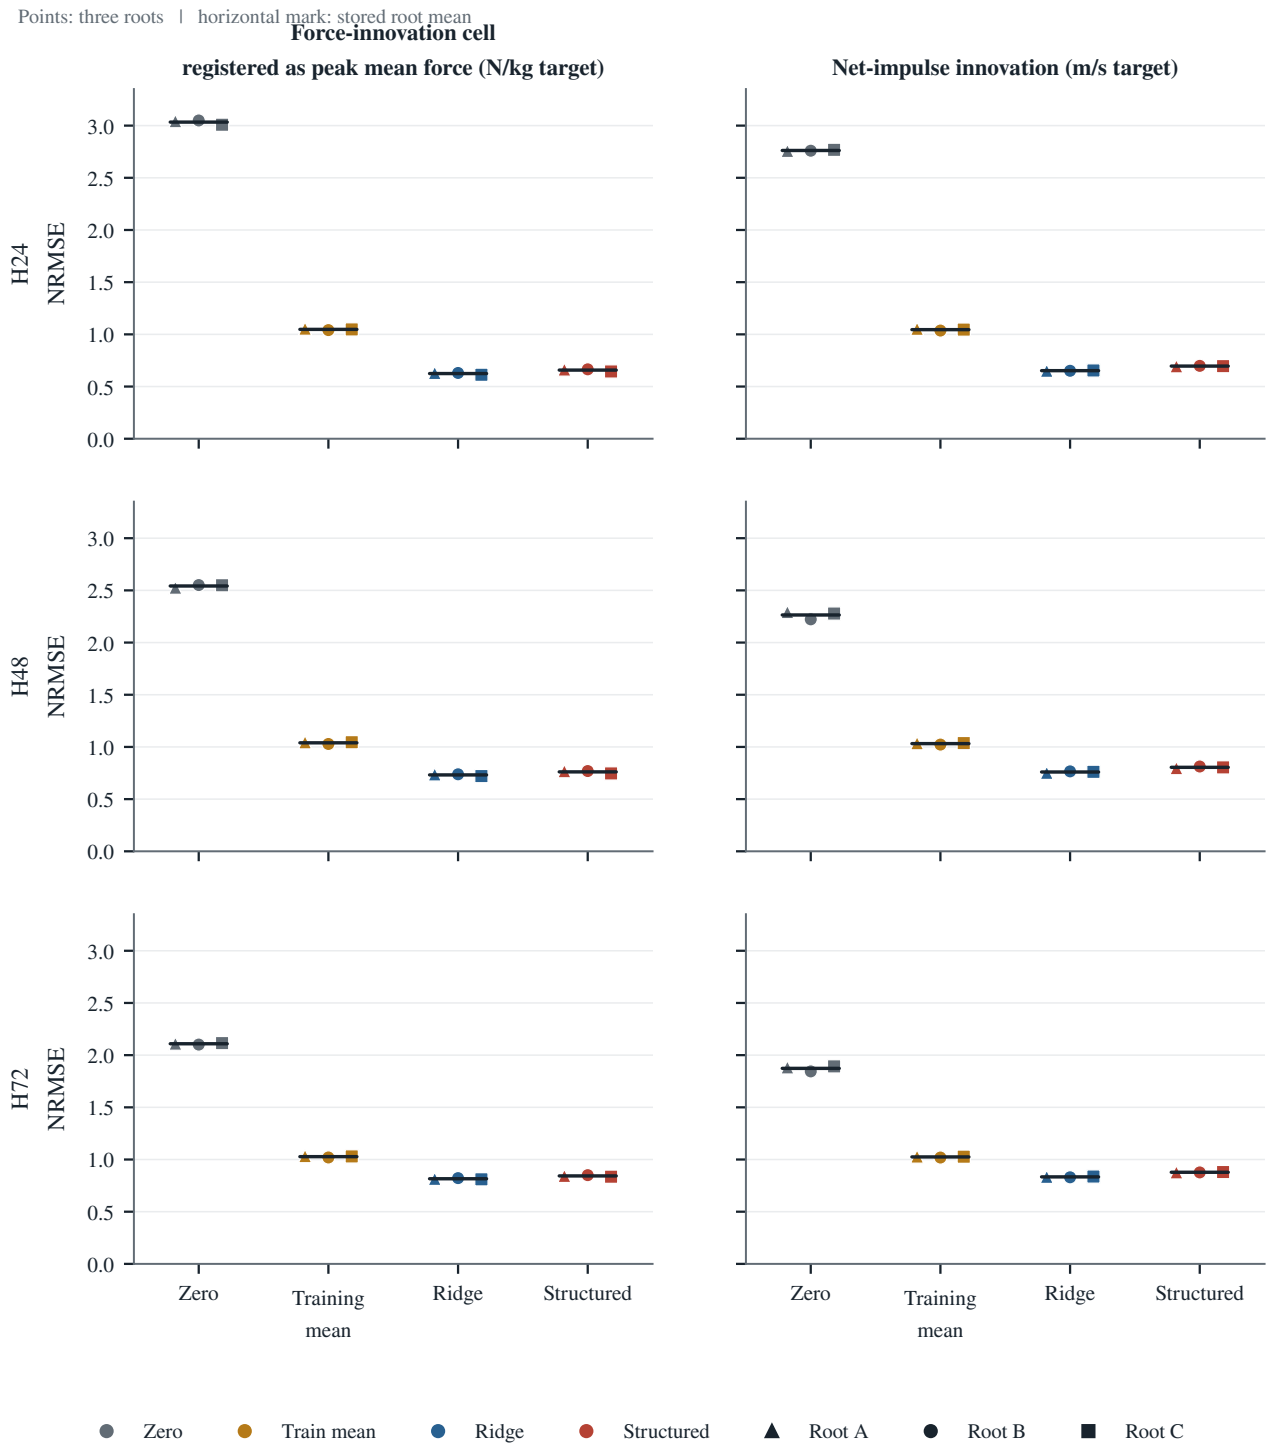



**Fig 7.** Existing public fixed-mode synthetic benchmark across six outcome-horizon cells. Each panel shows the three caller-supplied roots and stored root mean for zero innovation, training mean, ridge, and the structured comparator. Root symbols are jittered horizontally only to separate marks; they remain within their model group. Rows are H24, H48, and H72; columns are the registered force-innovation cell and net-impulse innovation. The force-cell key is `relative_peak_mean_force_innovation`, mapped to source field `label.relative_mean_concentric_force_innovation`. Force targets are in $\mathrm{N\,kg^{-1}}$ and impulse targets in $\mathrm{m\,s^{-1}}$; the vertical axis is cellwise NRMSE (dimensionless). Each evaluation root contains 16 camps and 4,000 rows per cell. The points and stored mean describe three fixed roots, not a confidence interval; all roots share one generator and are not human cohorts. Sources: S01, S23, and `six_cell_results.csv`.

The four reference models compare force and impulse at H24, H48, and H72. The three roots share one generator; they are not human cohorts. This is evidence about the registered synthetic task, not an accuracy evaluation of the original Gate7 neural families or validation of their native H72/D7 athlete predictions.

Table 2 reports the stored mean and root sample standard deviation for each outcome-horizon cell. These values preserve the recorded cell aggregates; no prediction or model score was recomputed for this article.

**Table 2.** Six-cell public synthetic benchmark NRMSE. Each entry is the stored mean across three same-generator evaluation roots ± the sample standard deviation across those roots, rounded to four decimal places. Full stored values are retained in `six_cell_results.csv`. NRMSE is dimensionless because each outcome-horizon RMSE is divided by that cell's population standard deviation before averaging. Force targets are in $\mathrm{N\,kg^{-1}}$ and impulse targets in $\mathrm{m\,s^{-1}}$; they are reported in separate rows and never pooled in physical units. The registered force-cell key and source target-field mapping are specified in Methods.

| Cell | Zero innovation | Training mean | Ridge | Structured |
|---|---|---|---|---|
| H24 force (N/kg) | 3.0335 ± 0.0220 | 1.0477 ± 0.0070 | 0.6244 ± 0.0101 | 0.6575 ± 0.0114 |
| H24 impulse (m/s) | 2.7618 ± 0.0054 | 1.0451 ± 0.0085 | 0.6522 ± 0.0017 | 0.6960 ± 0.0021 |
| H48 force (N/kg) | 2.5420 ± 0.0139 | 1.0395 ± 0.0095 | 0.7319 ± 0.0096 | 0.7610 ± 0.0128 |
| H48 impulse (m/s) | 2.2644 ± 0.0369 | 1.0318 ± 0.0080 | 0.7598 ± 0.0070 | 0.8046 ± 0.0077 |
| H72 force (N/kg) | 2.1090 ± 0.0072 | 1.0274 ± 0.0069 | 0.8157 ± 0.0057 | 0.8429 ± 0.0075 |
| H72 impulse (m/s) | 1.8732 ± 0.0255 | 1.0248 ± 0.0052 | 0.8336 ± 0.0037 | 0.8779 ± 0.0019 |

The stored six-cell mean scores were 0.736270 for ridge, 0.773316 for the structured comparator, 1.036038 for the training-mean baseline, and 2.430659 for zero innovation. Root sample standard deviations were 0.003349, 0.005490, 0.007308, and 0.008127, respectively (Table 3). Ridge had the lowest descriptive mean error in this generator. No inferential contrast between ridge and structured was recorded; this ranking is descriptive.

**Table 3.** Overall public synthetic benchmark score. Values are the stored mean six-cell NRMSE across three evaluation roots and the sample standard deviation (SD) of those three root scores. This is descriptive root variation, not a confidence interval.

| Reference model | Mean six-cell NRMSE | Root sample SD | Scope |
|---|---|---|---|
| Zero innovation | 2.430659 | 0.008127 | Predicts zero innovation |
| Training mean | 1.036038 | 0.007308 | Training-only outcome-by-horizon mean |
| Ridge | 0.736270 | 0.003349 | Full public feature schema |
| Structured | 0.773316 | 0.005490 | Fixed 24 h/84 h modes with observed covariates |

## 4.4 Recorded uncertainty, ablations, and sample efficiency

All six stored within-root model-versus-zero percentile intervals for ridge and structured have negative paired model-minus-zero endpoints. They support a reduction in NRMSE relative to the zero baseline within the corresponding synthetic root under the recorded camp-resampling scheme (Fig. 8). They do not support an uncertainty interval for ridge versus structured or for a new root drawn from a different generator.

## 4.5 Ablations and sample efficiency

The recorded ridge ablation scores were 0.819681 without prior history, 0.867735 without current exposure, and 0.736346 without participant context, compared with 0.736270 for full ridge. Omitting context changes the mean by approximately 0.000076. The separately specified structured model without history scores 0.820342. With 24, 48, and 96 training camps, nested ridge scores were 0.736889, 0.736602, and 0.736270; the structured-model scores were 0.773624, 0.773621, and 0.773316 (Fig. 9). These generator-conditional diagnostics do not identify causal feature importance or human sample efficiency.

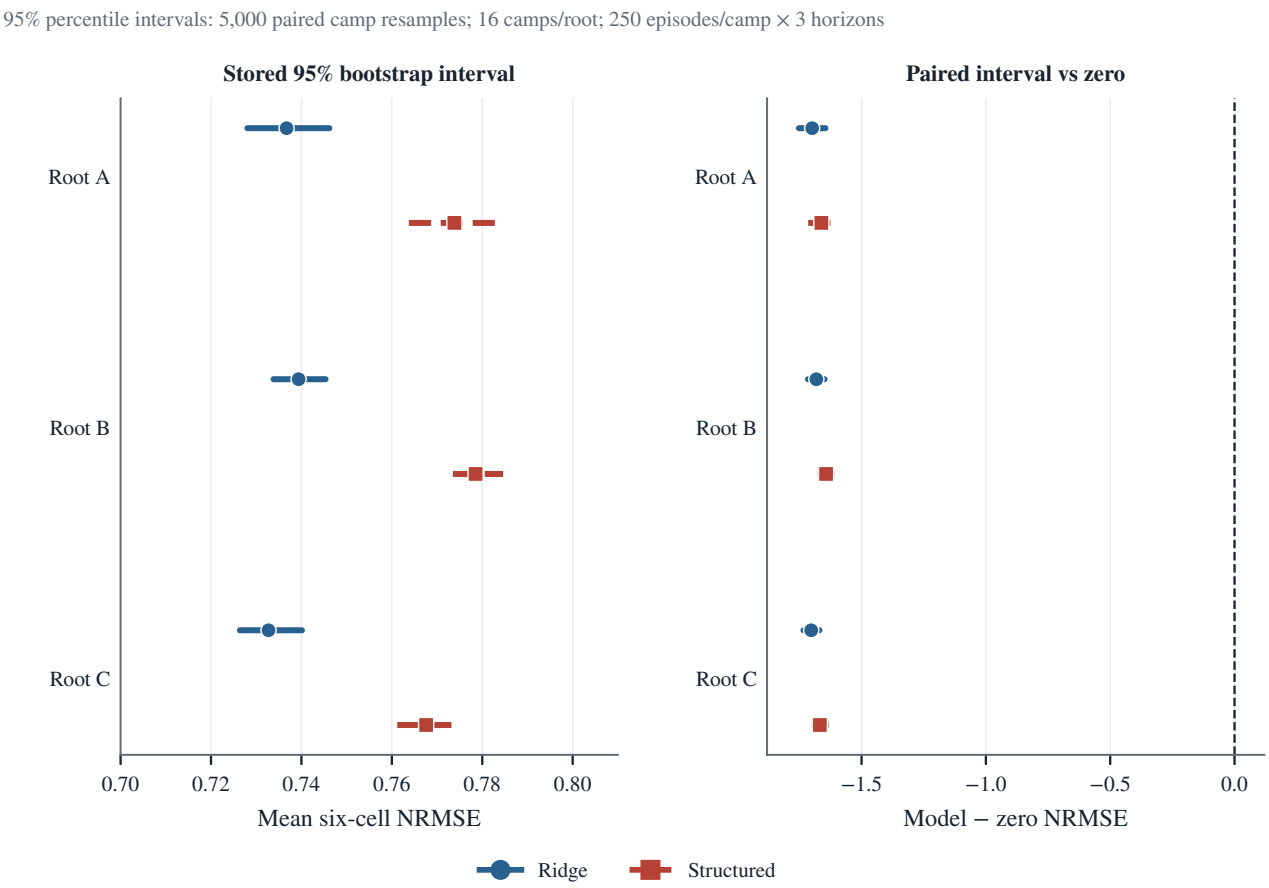



**Fig 8.** Recorded camp-bootstrap uncertainty for ridge and structured models within each of three synthetic evaluation roots. Panel A shows stored 95% percentile intervals for each model's mean six-cell normalized root-mean-square error (NRMSE). Panel B shows stored paired intervals for model-minus-zero-innovation NRMSE; values below zero favor the named model over zero innovation. Each root contributes 16 camps, with all 250 episodes and three horizon queries per selected camp retained together in 5,000 paired resamples using PCG64 seed 49,505,000. These intervals are conditional on a root and are not intervals across roots. No ridge-versus-structured confidence interval was recorded. Source: `recorded_uncertainty.csv`.

## 4.6 Historical reproduction limits

The public reproduction record remains partial for the historical program. In the rich-history reconstruction, the clean-room training materialization has 15,134 horizon rows versus 15,182 in the historical record. The validation materialization has 3,799 versus 3,795. These are documented differences in horizon membership; they are not a newly discovered response effect. Matching counts in other formulations would not prove historical split identity.

Fig. 10 quantifies these sample-membership differences as clean-room minus historical row counts. The M0–M8 qualification is not an empirical athlete performance result.

Dots are recorded root values; ticks above indicate stored root means. No causal effect is inferred.

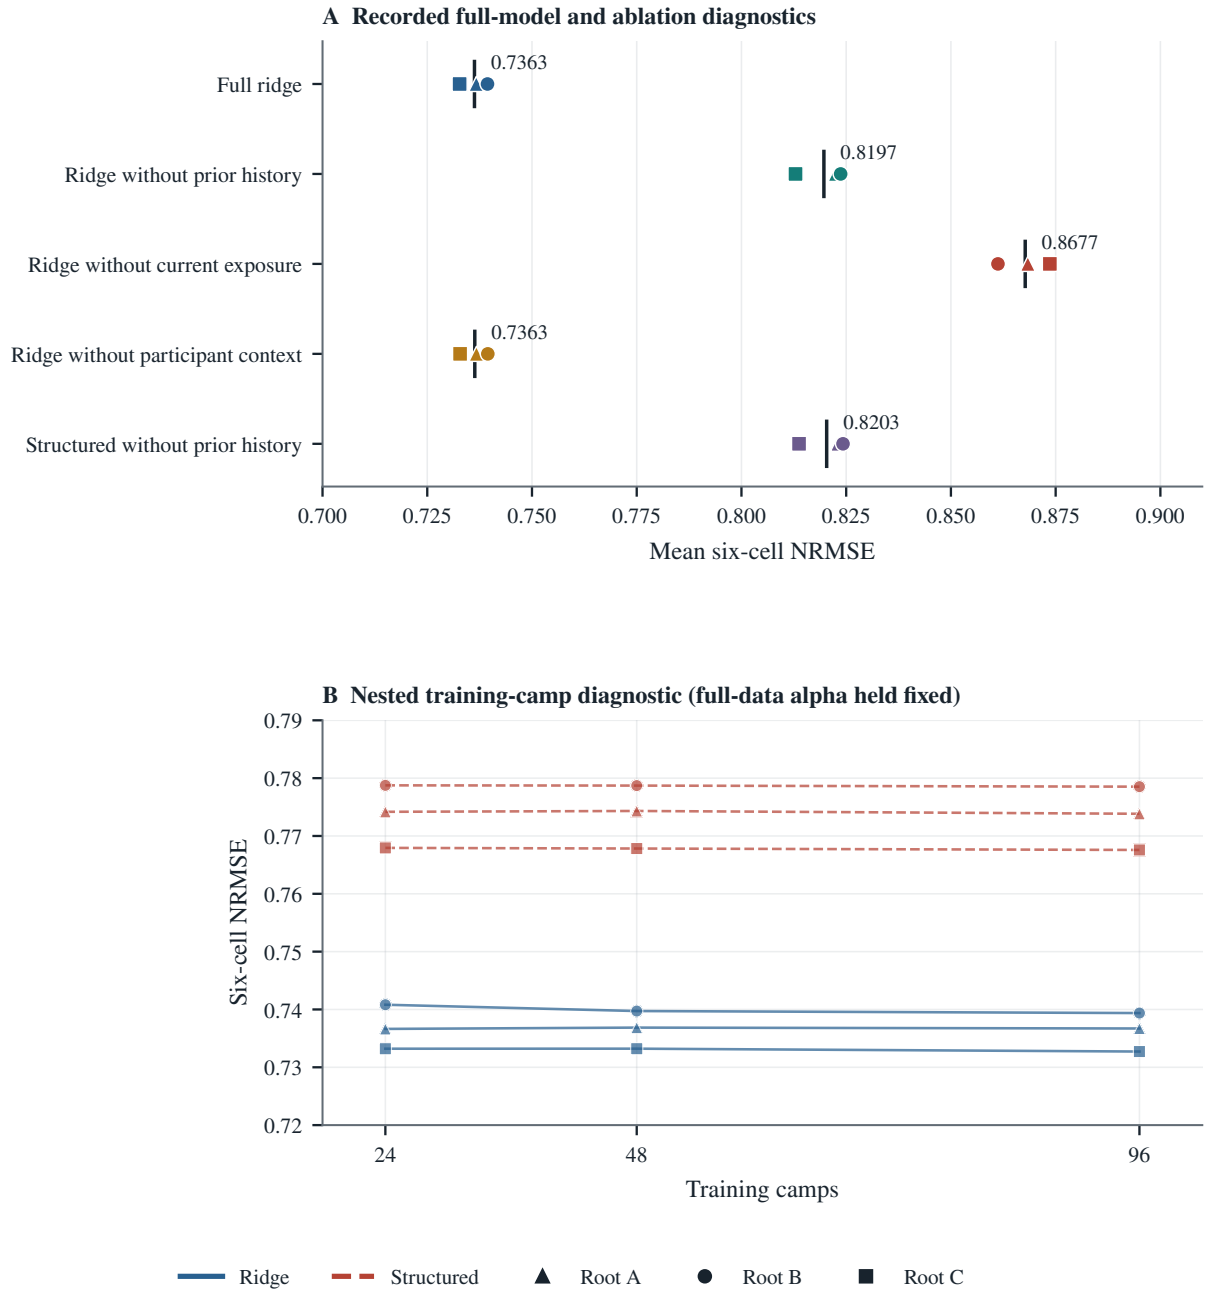



**Fig 9.** Recorded ablation and nested-camp comparisons. Panel A shows the three evaluation-root values and root mean for full ridge and the ridge variants without prior history, current exposure, or participant context. Structured-without-history is shown as a separate comparator diagnostic. Panel B shows root-specific scores for ridge and structured models trained on nested subsets of 24, 48, or 96 camps; the alpha selected on the full training/development data was held fixed. All values are dimensionless six-cell NRMSE within the same synthetic generator. No confidence intervals are shown; these comparisons do not isolate causal feature effects or estimate athlete-level sample efficiency. Source: S01.

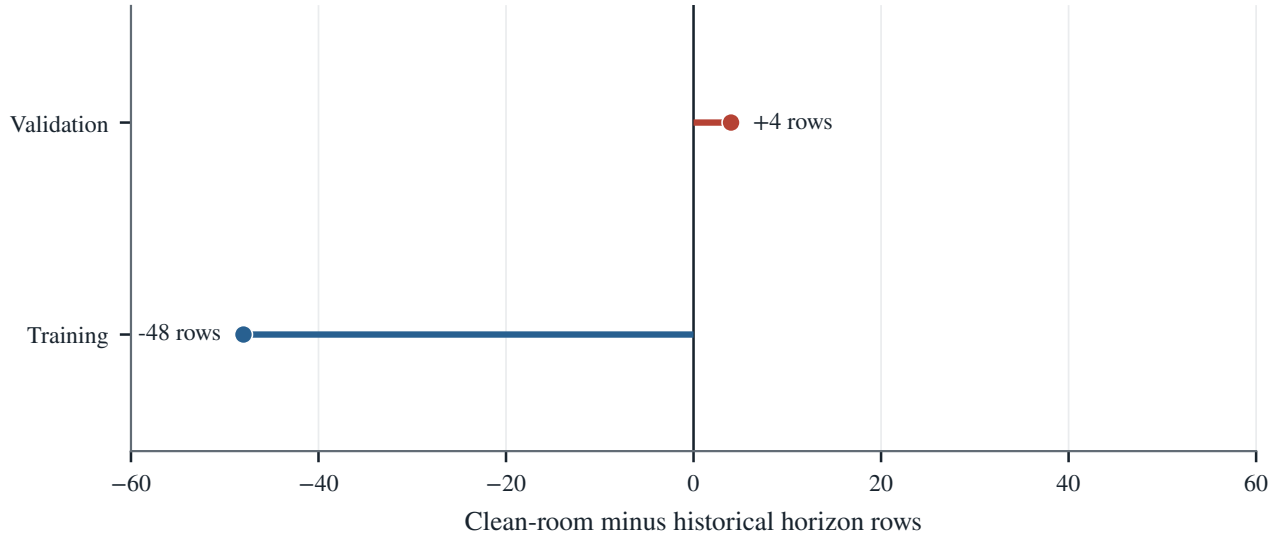



**Fig 10.** The figure compares public clean-room and historical rich-history materializations by training and validation split. The horizontal axis gives the clean-room minus historical horizon-row count. Training contains 15,134 clean-room rows and 15,182 historical rows, a difference of −48. Validation contains 3,799 clean-room rows and 3,795 historical rows, a difference of +4. These counts describe membership differences in the preserved splits. They are not response effects or uncertainty intervals. Sources: S03 and S04.

## 5 Discussion

This reconstruction illustrates why reproducibility should be reported as a set of qualified operations rather than one binary label. The recorded source-CPU results agree exactly across all 18 neural model routes, yet ten comparisons with saved historical CUDA arrays fail the original tolerance. A single "reproduced" label would obscure that distinction. The evidence supports recovered-source inference under the recorded CPU comparison and a negative historical-runtime comparison; it does not show a successful replay of the original graphics-processor execution.

The synthetic comparison is also bounded. Ridge has lower mean six-cell NRMSE than the structured reference in the three supplied roots, while the structured result remains substantially below the two simpler baselines. This is a useful observation about the registered generator, predictors, alpha selection, and aggregation rule. It is not a universal model ranking. Every root comes from the same simulation world, and all six outcomes are normalized separately before aggregation. The recorded bootstrap compares each model with zero innovation but does not test ridge against structured.

The ablation results reinforce this scope. Removing current exposure or history increases error in this generator, whereas removing participant context changes the full-ridge score very little. Because variants were fitted and selected under the existing study protocol, these contrasts describe model configurations under that protocol; they do not identify causal athlete mechanisms. Likewise, the small difference across nested camp sizes cannot be generalized to a real monitoring program, particularly because each synthetic camp contains many generated episodes and the model's regularization value was selected on the full training/development data then held fixed.

Measurement contracts place a separate boundary on interpretation. Correct trapezoidal integration requires correct force calibration, system mass, event boundaries, and trial validity. A stable arithmetic formula does not prove that an empirical event detector selected the intended phase or that a two-assessment baseline represents physiological recovery. The native H72/D7 metrics are in physical units and are not interchangeable with the public benchmark's H24/H48/H72 cellwise normalized errors.

The contribution is a case study of one historical program and an engineering account of how its evidence can be separated. Stable source identities, explicit route and measurement contracts, a frozen tolerance, public receipt arithmetic, and a public-safe summary make the supported results inspectable. This application draws on established reporting, tracking, provenance, and artifact-review practices; it does not introduce a new general framework, experimentally compare those systems, or demonstrate that the approach generalizes to other

archives [2, 4–8, 12]. The technical supplement (S1 Text) contains the formulation, route, cell, and bootstrap tables.

## 6 Limitations and threats to validity

First, the original model weights, configurations, and restricted records are not part of the public package. The private artifact associations and CPU-source equality are preserved as qualification evidence, but a reader with only the released package cannot independently reproduce those original inference outputs. This access boundary is a limitation of independent auditability, not permission to disclose unlicensed artifacts.

Second, saved-CUDA discrepancies are reported under a fixed tolerance, but the exact historical runtime cause is unresolved. Maximum absolute errors pool two output columns with different units, so they must not be interpreted as a common physical magnitude. No GPU replay or new checkpoint inference was performed for this article.

Third, the public benchmark has only three evaluation roots from one synthetic generator and 16 camps per root. The root sample standard deviation is descriptive. The camp bootstrap is conditional on each root and its resampling design. Neither estimates transportability to athlete populations, and the stored bootstrap does not compare ridge directly with the structured comparator.

Fourth, the alpha grid selection reached its lower boundary for all full-data model families. The recorded test results are retained without retuning, but performance may depend on regularization values outside the frozen grid. The nested sample-size analysis holds the full-data-selected alpha fixed and should not be read as a complete study of training-data efficiency. For any empirical prospective setting, the temporal authority of the future-plan snapshots used by the original schedule basis would also need to be established.

Fifth, no independent athlete cohort, prospective assessment protocol, clinical-use evaluation, or production-monitoring study is included. No human predictive validity, causal response mechanism, out-of-distribution performance, clinical utility, or individual recovery classification is established. The eight historical formulations have partial reproduction status, and the rich-history row-count discrepancies remain unresolved.

## 7 Reproducibility and availability

The public research software is available under Apache-2.0 at https://github.com/Litju/CMJRecoveryDynamicsBench/releases/tag/v1.1.0. Its immutable source identity is commit `401f87aad1e4ef4108011fa0c1d769a24f1ad329`. The public package includes the synthetic-study protocol and receipts, release-linked source snapshots, sanitized route summaries, calculation scripts, figure inputs, and checksum inventory. An external reader can verify source snapshot hashes, reproduce figures, and check the reported synthetic receipt arithmetic using those files. The public package does not contain the original fitted checkpoints, fitted preprocessing values, private inference arrays, or restricted observation and source-reconciliation records. It therefore cannot independently reproduce the recorded original-model qualification. No approved controlled-access route for those restricted artifacts is established here, and access is not offered upon request. The separate public synthetic results do not validate the restricted Gate7 route claims. The accompanying availability assessment maps each main claim to the public materials and identifies what cannot be independently reproduced.

## 8 Conclusions

This case study answers three bounded questions. Eight historical formulation identities and nine original neural model families can be described from the preserved archive, but ancestry, fitted state, rights, and rich-history membership remain partly unresolved. The privately recorded numerical qualification reports exact source-CPU equality for 18 routes and saved-CUDA tolerance failures for both repeats of M4–M8; it does not establish historical GPU replay and cannot be independently rerun from the public package. The public synthetic benchmark reports lower descriptive six-cell NRMSE for ridge than for the structured comparator across three roots from

one generator, but these are not Gate7 model accuracies or athlete validation. The contribution is the evidence-bounded reconstruction of this program, not a universal provenance method or a claim of predictive validity.

## Acknowledgments and author declarations

**Author contributions.** Author identities, affiliations, corresponding-author contact details, and CRediT roles require owner completion. No authorship is inferred from software metadata or agent participation.

**Funding.** Funding sources and funder roles require author confirmation. For a PLOS ONE submission, the funding disclosure belongs in the submission system and this placeholder must be removed.

**Competing interests.** All potential financial and nonfinancial competing interests require author confirmation. For a PLOS ONE submission, the declaration belongs in the submission system and this placeholder must be removed.

**Ethics and human participants.** This manuscript reports no newly collected athlete data and no human-participant experiment. The authors must confirm this statement before submission.

**Data availability.** The v1.1.0 source release, public synthetic-study protocol and receipts, source snapshots, and figure inputs are publicly available at the release URL and in the V3 package. Original fitted checkpoints, fitted preprocessing values, private inference arrays, and restricted observation and source-reconciliation records are not included. This package does not establish a controlled-access mechanism for those materials; they are not offered upon request. Public materials permit figure regeneration and verification of published receipt arithmetic, but not independent reproduction of the original checkpoint qualification. See the accompanying claim-level data and software availability assessment. Journal-specific eligibility remains unresolved.

**Generative AI and AI-assisted technologies.** OpenAI Codex in the GPT-6 agent environment assisted with official-guideline research, manuscript restructuring and drafting, plotting and document-generation code, and first-pass artifact review. Exact finer model-build metadata was not exposed. Benchmark and qualification values come from cited, pre-existing receipts and sanitized summaries; conventional Python code generates the figures, including the equation-based Fig. 6 illustration. No generative-image model or new empirical benchmark result was used. Human authors have not yet reviewed or approved this draft and must verify its content, sources, and all declarations before submission. No AI system is an author.

## References

[1] Goodman SN, Fanelli D, Ioannidis JPA. What does research reproducibility mean? Science Translational Medicine. 2016;8(341):341ps12. doi:10.1126/scitranslmed.aaf5027.

[2] Pineau J, Vincent-Lamarre P, Sinha K, Lariviere V, Beygelzimer A, d'Alche-Buc F, et al. Improving Reproducibility in Machine Learning Research (A Report from the NeurIPS 2019 Reproducibility Program). Journal of Machine Learning Research. 2021;22(164):1-20. Available from: https://www.jmlr.org/papers/v22/20-303.html.

[3] Sandve GK, Nekrutenko A, Taylor J, Hovig E. Ten Simple Rules for Reproducible Computational Research. PLoS Computational Biology. 2013;9:e1003285. doi:10.1371/journal.pcbi.1003285.

[4] MLflow Project. MLflow Tracking;. Latest documentation; accessed 6 November 2026. Available from: https://mlflow.org/docs/latest/tracking/.

[5] Data Version Control Project. Experiment Management;. User guide; accessed 6 November 2026. Available from: https://doc.dvc.org/user-guide/experiment-management.

[6] Lebo T, Sahoo S, McGuinness D. PROV-O: The PROV Ontology; 2013. W3C Recommendation, 30 April 2013. Available from: https://www.w3.org/TR/2013/REC-prov-o-20130430/.

[7] RO-Crate Community. RO-Crate Metadata Specification 1.3; 2026. Published 22 June 2026; version 1.3. doi:10.5281/zenodo.20720080.

[8] Barker M, Chue Hong NP, Katz DS, Lamprecht AL, Martinez-Ortiz C, Psomopoulos F, et al. Introducing the FAIR Principles for research software. Scientific Data. 2022;9:622. doi:10.1038/s41597-022-01710-x.

[9] Anicic Z, Janicijevic D, Knezevic OM, Garcia-Ramos A, Petrovic MR, Cabarkapa D, et al. Assessment of Countermovement Jump: What Should We Report? Life. 2023;13:190. doi:10.3390/life13010190.

[10] Merrigan JJ, Stone JD, Hornsby WG, Hagen JA. Identifying Reliable and Relatable Force–Time Metrics in Athletes—Considerations for the Isometric Mid-Thigh Pull and Countermovement Jump. Sports. 2020;9:4. doi:10.3390/sports9010004.

[11] Wilkinson MD, Dumontier M, Aalbersberg IJ, Appleton G, Axton M, Baak A, et al. The FAIR Guiding Principles for scientific data management and stewardship. Scientific Data. 2016;3:160018. doi:10.1038/sdata.2016.18.

[12] Association for Computing Machinery. Artifact Review and Badging; 2020. Version 1.1, 24 August 2020; accessed 6 November 2026. Available from: https://www.acm.org/publications/policies/artifact-review-and-badging-current.

[13] Goldberg D. What every computer scientist should know about floating-point arithmetic. ACM Computing Surveys. 1991;23:5-48. doi:10.1145/103162.103163.

[14] Ahrens W, Demmel J, Nguyen HD. Algorithms for Efficient Reproducible Floating Point Summation. ACM Transactions on Mathematical Software. 2020;46:1-49. doi:10.1145/3389360.

[15] Debray TPA, Collins GS, Riley RD, Snell KIE, Van Calster B, Reitsma JB, et al. Transparent reporting of multivariable prediction models developed or validated using clustered data: TRIPOD-Cluster checklist. BMJ. 2023;380:e071018. doi:10.1136/bmj-2022-071018.

[16] Morris TP, White IR, Crowther MJ. Using simulation studies to evaluate statistical methods. Statistics in Medicine. 2019;38:2074-102. doi:10.1002/sim.8086.

[17] Breck E, Cai S, Nielsen E, Salib M, Sculley D. The ML test score: A rubric for ML production readiness and technical debt reduction. In: 2017 IEEE International Conference on Big Data (Big Data); 2017. p. 1123-32. doi:10.1109/bigdata.2017.8258038.