

• 安装allure插件


- 1 Jenkins中安装Allure插件

2 Allure Jenkins Plugin

• 安装allure



• 新建freestyle项目

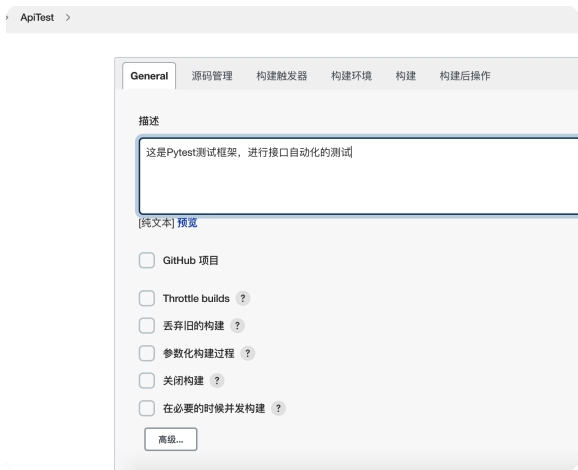

• 丢弃旧的构建



• 增加源码



构建环境

☒ Delete workspace before build starts

高级...

构建之前删除之前的 workspace

☐ Use secret text(s) or file(s)

?

☐ Add timestamps to the Console Output

☐ Inspect build log for published Gradle build scans

☐ Terminate a build if it's stuck

☐ With Ant

?

构建

构建

执行 shell

?

命令

查看 可用的环境变量列表

```
#!/bin/bash
cd ${WORKSPACE}
pip3 install -r requirements.txt --user
pytest
```

高级...

增加构建步骤

```
1 #!/bin/bash
2 cd ${WORKSPACE}
3 pip3 install -r requirements.txt --user
4 pytest
```

构建后操作

构建后操作

Allure Report

☐ Disabled

Results:

Paths to Allure results directories relative from workspace.  
E.g. target/allure-results.

Path

report

1 和 pytest.ini 的报告输出文件位置一致

新增

安装插件 Post Build task 进行生成报告后的shell执行

## Post build task

### Tasks

2

#### Log text

#### Operation

-- AND --

新增

#### Script ?

```
#!/bin/bash
cd ${WORKSPACE}/ding_talk
python3 send_ding.py
```

☐ Run script only if all previous steps were successful

☐ Escalate script execution status to job status

Add another task

```
1 #!/bin/bash
2 cd ${WORKSPACE}/message
3 python3 send_ding.py
```