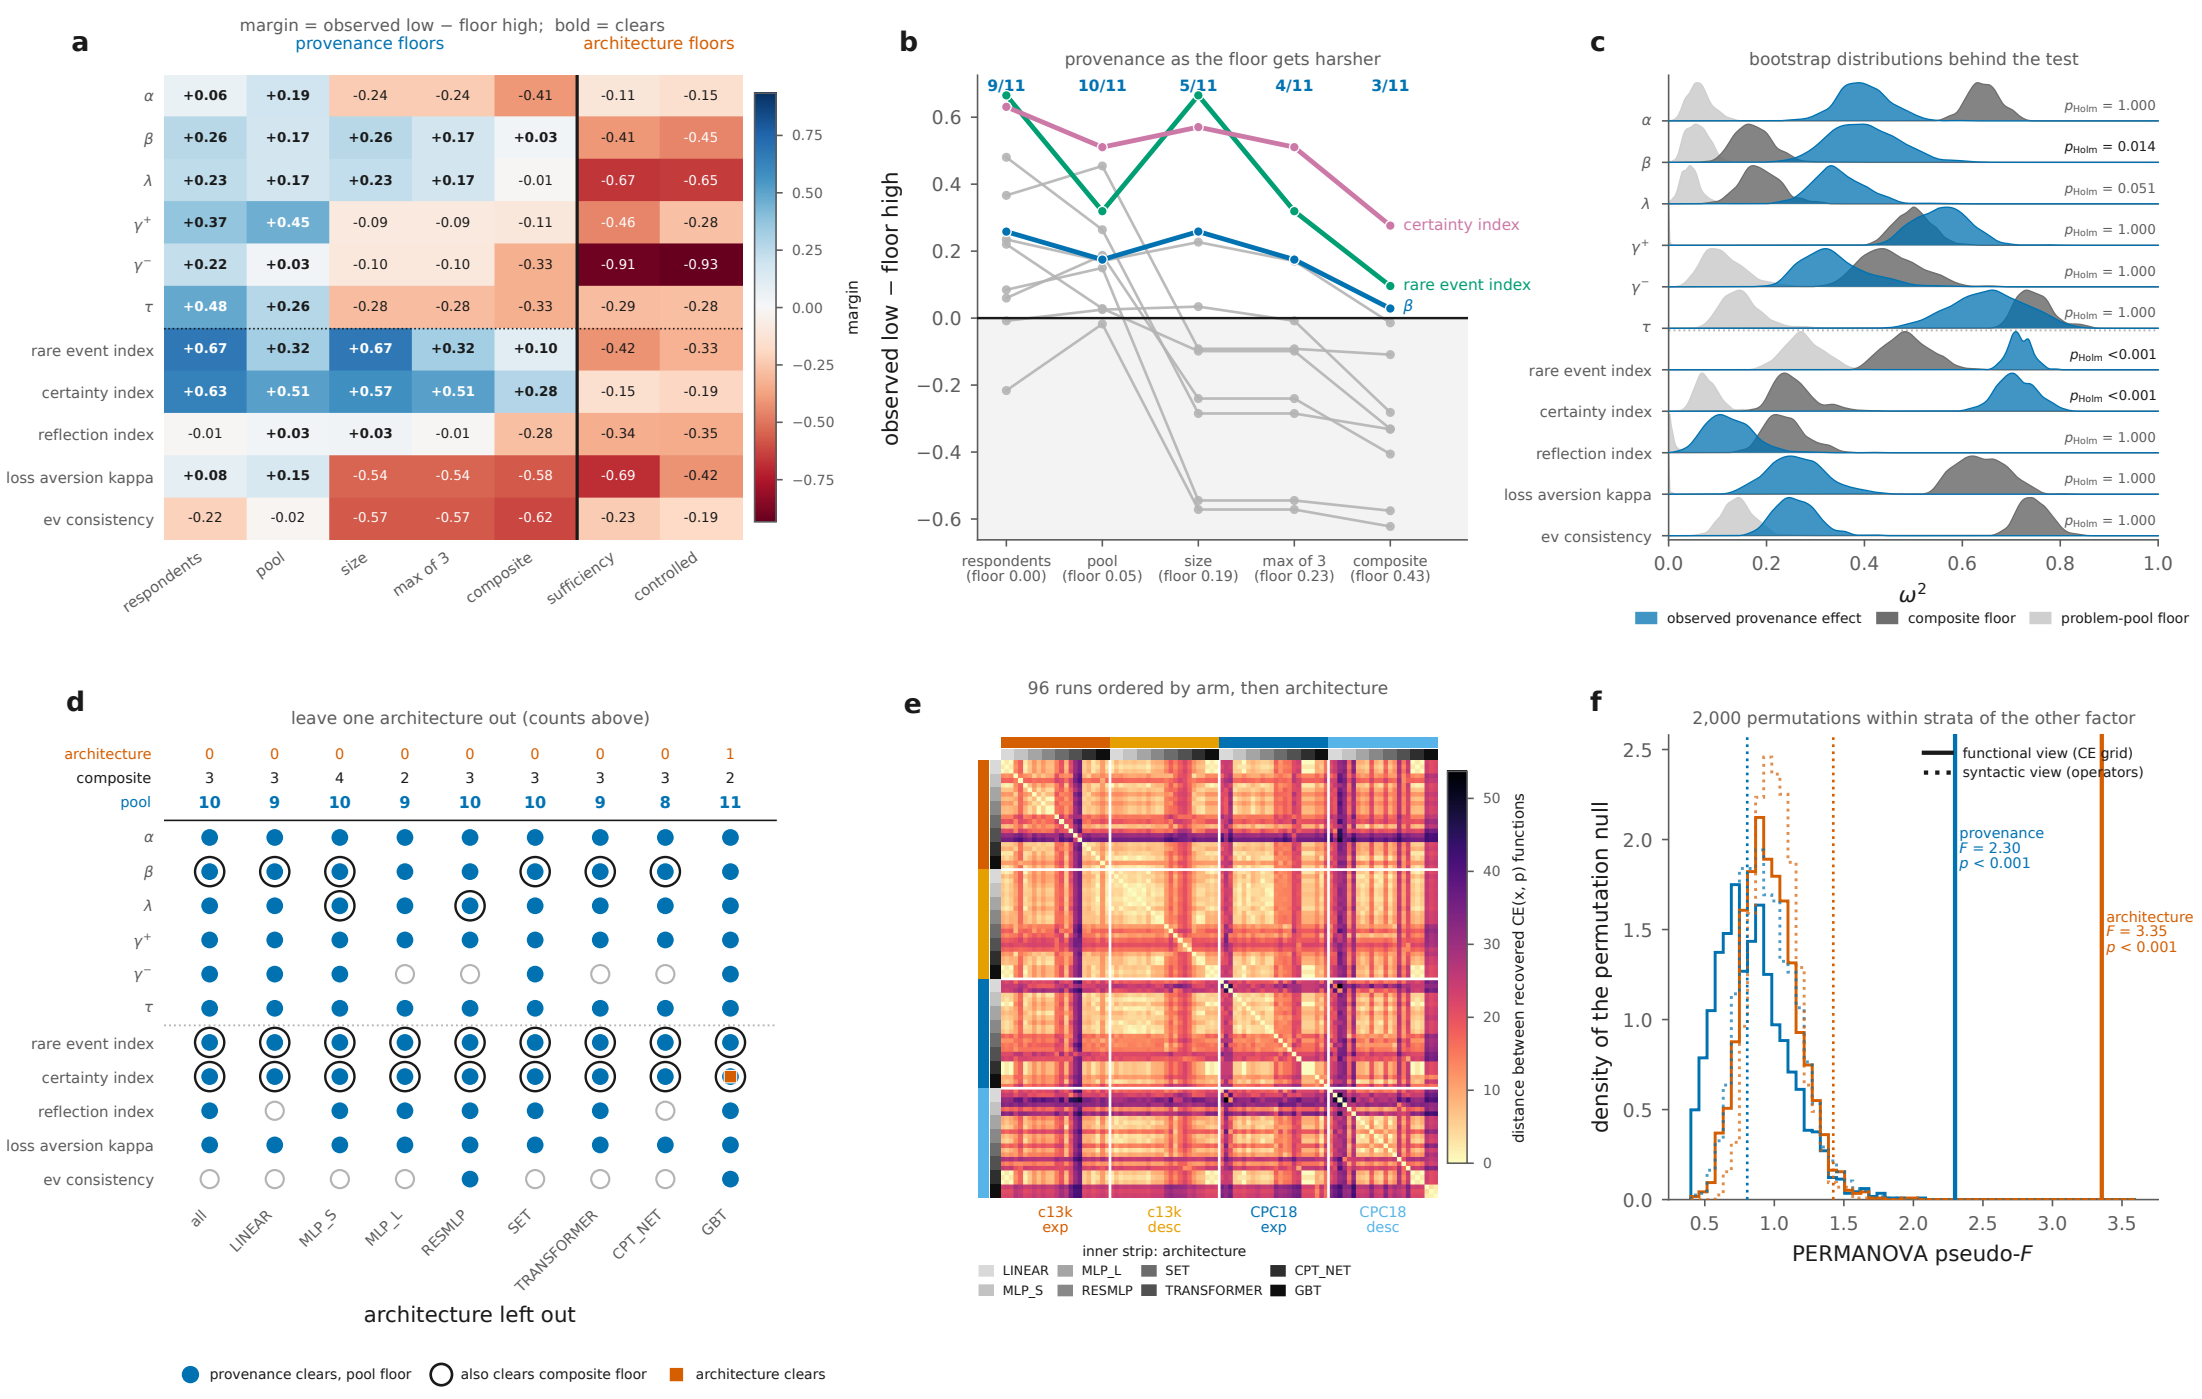

a
margin = observed low − floor high; bold = clears
provenance floors
architecture floors
α +0.06 +0.19 -0.24 -0.24 -0.41 -0.11 -0.15
β +0.26 +0.17 +0.26 +0.17 +0.03 -0.41 -0.45
λ +0.23 +0.17 +0.23 +0.17 -0.01 -0.67 -0.65
γ⁺ +0.37 +0.45 -0.09 -0.09 -0.11 -0.46 -0.28
γ⁻ +0.22 +0.03 -0.10 -0.10 -0.33 -0.91 -0.93
τ +0.48 +0.26 -0.28 -0.28 -0.33 -0.29 -0.28
rare event index +0.67 +0.32 +0.67 +0.32 +0.10 -0.42 -0.33
certainty index +0.63 +0.51 +0.57 +0.51 +0.28 -0.15 -0.19
reflection index -0.01 +0.03 +0.03 -0.01 -0.28 -0.34 -0.35
loss aversion kappa +0.08 +0.15 -0.54 -0.54 -0.58 -0.69 -0.42
ev consistency -0.22 -0.02 -0.57 -0.57 -0.62 -0.23 -0.19
respondents
pool
size
max of 3
composite
sufficiency
controlled
margin
0.75
0.50
0.25
0.00
−0.25
−0.50
−0.75
b
provenance as the floor gets harsher
9/11
10/11
5/11
4/11
3/11
observed low − floor high
certainty index
rare event index
β
respondents (floor 0.00)
pool (floor 0.05)
size (floor 0.19)
max of 3 (floor 0.23)
composite (floor 0.43)
c
bootstrap distributions behind the test
p_Holm = 1.000
p_Holm = 0.014
p_Holm = 0.051
p_Holm = 1.000
p_Holm = 1.000
p_Holm = 1.000
p_Holm <0.001
p_Holm <0.001
p_Holm = 1.000
p_Holm = 1.000
p_Holm = 1.000
ω²
observed provenance effect
composite floor
problem-pool floor
d
leave one architecture out (counts above)
architecture 0 0 0 0 0 0 0 0 1
composite 3 3 4 2 3 3 3 3 2
pool 10 9 10 9 10 10 9 8 11
all
LINEAR
MLP_S
MLP_L
RESMLP
SET
TRANSFORMER
CPT_NET
GBT
architecture left out
provenance clears, pool floor
also clears composite floor
architecture clears
e
96 runs ordered by arm, then architecture
distance between recovered CE(x, p) functions
c13k exp
c13k desc
CPC18 exp
CPC18 desc
inner strip: architecture
LINEAR
MLP_S
MLP_L
RESMLP
SET
TRANSFORMER
CPT_NET
GBT
f
2,000 permutations within strata of the other factor
functional view (CE grid)
syntactic view (operators)
provenance
F = 2.30
p < 0.001
architecture
F = 3.35
p < 0.001
density of the permutation null
PERMANOVA pseudo-F