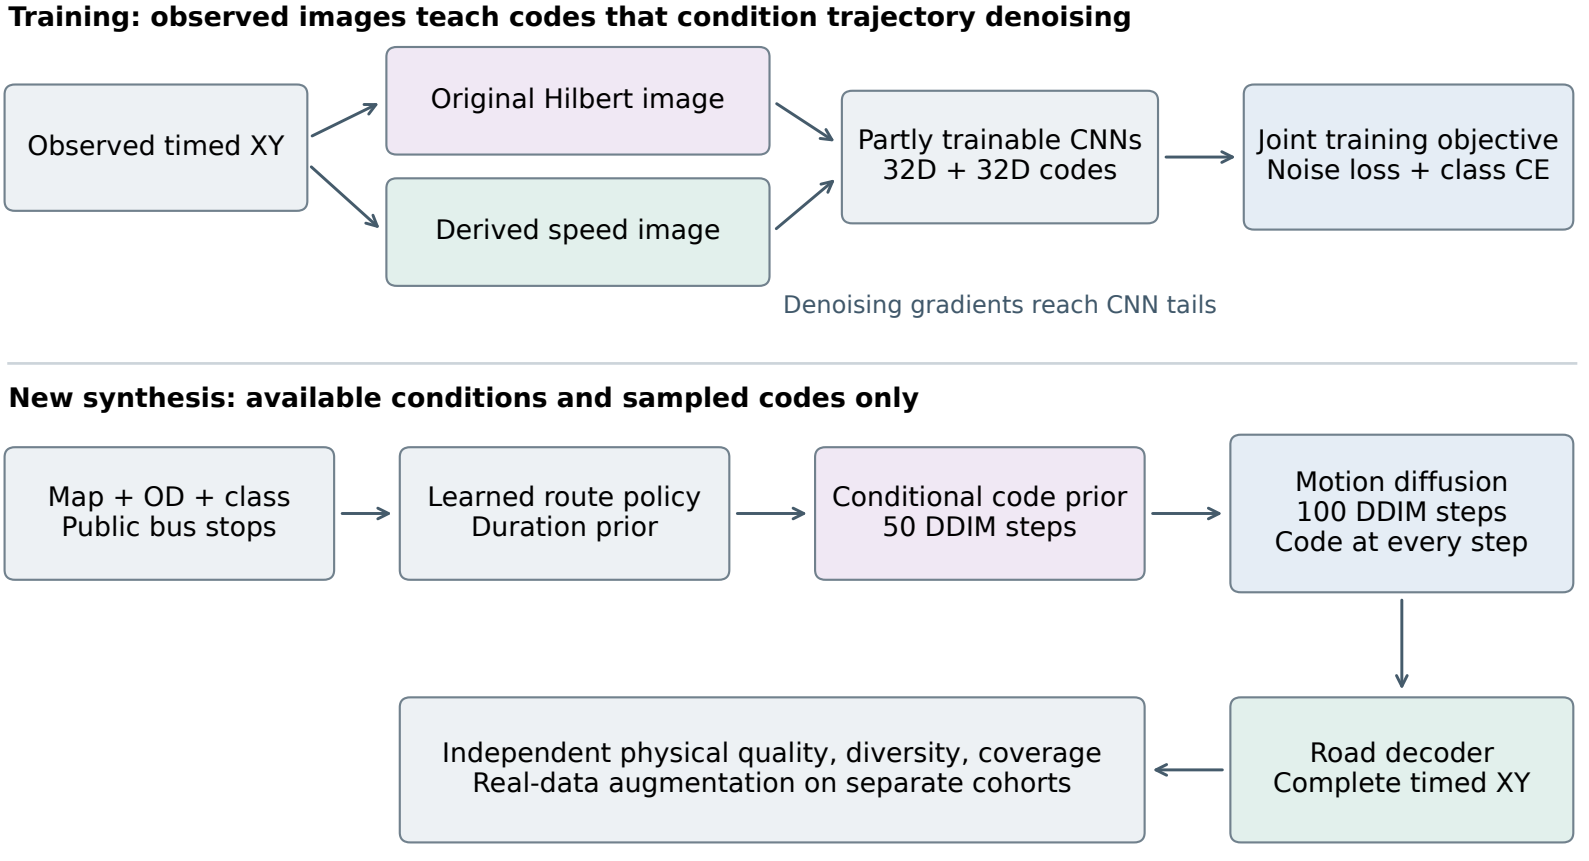

Out-of-sample inference: requires only map, OD, class, and sampled latent codes.