

DeepSeek API 接入 Claude Code VS Code 插件

Using DeepSeek API in Claude Code for VS Code

一句话：不要点登录页的三个按钮；开启 **Disable Login Prompt**，然后配置 `~/.claude/settings.json`。

Bottom line: do not click the three login buttons; enable Disable Login Prompt, then configure `~/.claude/settings.json`.

DeepSeek API 接入 Claude Code VS Code 插件

Quick flow for using DeepSeek API in the Claude Code VS Code extension



图 1 / Figure 1. 最短流程 / Shortest setup flow

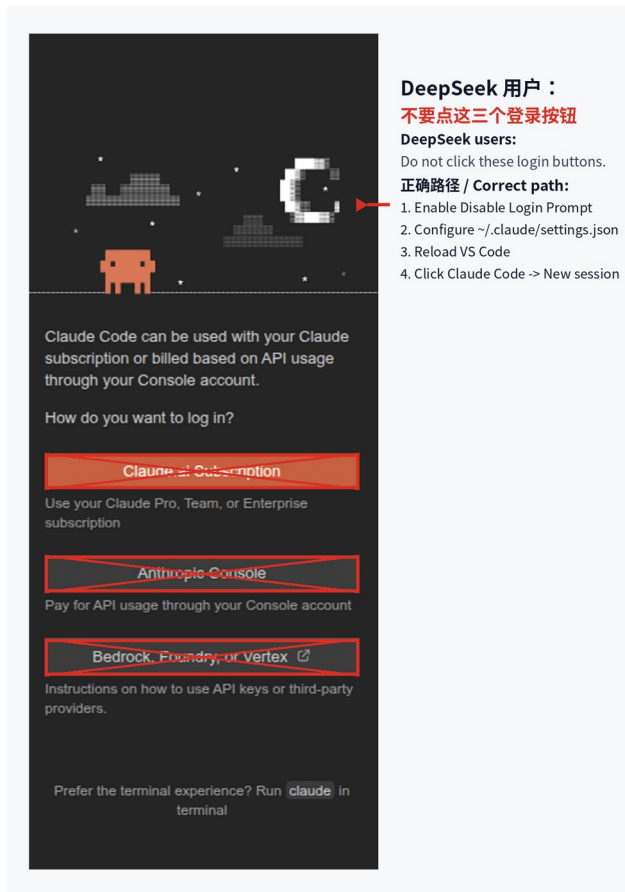


图 2 / Figure 2. 登录页处理方式 / How to handle the login screen

1. VS Code 插件设置

Extension setting

- **打开 VS Code 设置：Ctrl + , (Mac 是 Cmd + ,) 。**
Open VS Code Settings: Ctrl + , on Windows/Linux, Cmd + , on Mac.
- **搜索 Claude Code login，勾选 Disable Login Prompt。**
Search Claude Code login, then enable Disable Login Prompt.
- **也可以直接在 VS Code settings.json 加这一行：**
Or add this line to VS Code settings.json:

VS Code settings.json

```
"claudeCode.disableLoginPrompt": true
```

2. 创建 Claude Code 配置文件

Create Claude Code shared settings

- **Linux / Mac: ~/.claude/settings.json**
Linux / Mac: ~/.claude/settings.json
- **Windows: C:\Users\<用户名>\.claude\settings.json**
Windows: C:\Users\<username>\.claude\settings.json
- **如果没有 .claude 文件夹或 settings.json，就手动创建。**
Create the folder/file manually if it does not exist.

Linux / Mac quick command

```
mkdir -p ~/.claude  
nano ~/.claude/settings.json
```

3. 粘贴配置模板

Paste this configuration

把 <your DeepSeek API Key> 替换成你的真实 DeepSeek API Key。

Replace <your DeepSeek API Key> with your real DeepSeek API key.

```
~/.claude/settings.json
{
  "$schema": "https://json.schemastore.org/claude-code-settings.json",
  "env": {
    "ANTHROPIC_BASE_URL": "https://api.deepseek.com/anthropic",
    "ANTHROPIC_AUTH_TOKEN": "<your DeepSeek API Key>",
    "ANTHROPIC_MODEL": "deepseek-v4-pro[1m]",
    "ANTHROPIC_DEFAULT_OPUS_MODEL": "deepseek-v4-pro[1m]",
    "ANTHROPIC_DEFAULT_SONNET_MODEL": "deepseek-v4-pro[1m]",
    "ANTHROPIC_DEFAULT_HAIKU_MODEL": "deepseek-v4-flash[1m]",
    "CLAUDE_CODE_DISABLE_NONESSENTIAL_TRAFFIC": "1",
    "CLAUDE_CODE_EFFORT_LEVEL": "max"
  }
}
```

不要把这个文件提交到 Git；里面有你的 API Key。

Do not commit this file to Git if it contains your API key.

4. 重载并开始使用

Reload and start

- 按 **Ctrl + Shift + P**，运行 **Developer: Reload Window**。
Press Ctrl + Shift + P and run Developer: Reload Window.
- 点左侧 **Claude Code** 图标，再点 **New session**。
Click the Claude Code icon in the sidebar, then click New session.
- 如果插件仍卡登录页，用终端保底方案。
If the extension still shows the login page, use the terminal fallback.

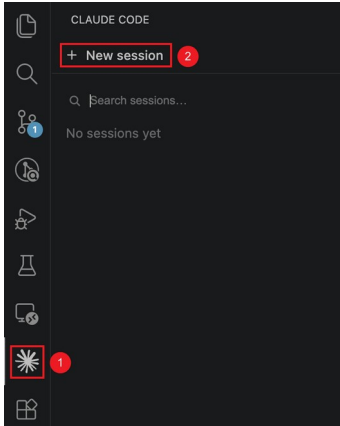


图 3 / Figure 3. Claude Code -> New session

终端保底方案

Terminal fallback

```
CLI fallback
npm install -g @anthropic-ai/claude-code
claude --version

cd /path/to/my-project
claude
```

快速排错

Quick troubleshooting

问题 / Problem	检查 / Check	处理 / Fix
仍是登录页	disableLoginPrompt 是否为 true	重载窗口，确认 VS Code settings.json
Key 报错	ANTHROPIC_AUTH_TOKEN	重新复制 DeepSeek API Key
New session 无响应	先跑 claude 终端版	确认 CLI 能正常请求

参考资料

Sources

- [1] DeepSeek API Docs - Integrate with Claude Code: https://api-docs.deepseek.com/quick_start/agent_integrations/claude_code/
- [2] DeepSeek GitHub - awesome-deepseek-agent / claude_code.md: https://github.com/deepseek-ai/awesome-deepseek-agent/blob/main/docs/claude_code.md
- [3] Claude Code Docs - Use Claude Code in VS Code: <https://code.claude.com/docs/en/vs-code>