


entt::service_locator::set

entt::service_locator::set

entt::service_locator::get

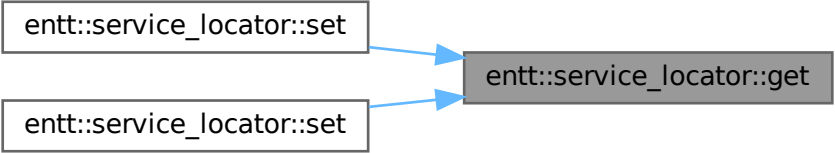

```
graph LR; A[entt::service_locator::set] --> C[entt::service_locator::get]; B[entt::service_locator::set] --> C;
```

The diagram illustrates a relationship between three function calls. On the left, there are two identical white rectangular boxes, each containing the text 'entt::service_locator::set'. On the right, there is a single gray rectangular box containing the text 'entt::service_locator::get'. Two blue arrows originate from the right side of the top 'set' box and the right side of the bottom 'set' box, both pointing towards the left side of the 'get' box. This suggests that both 'set' operations are prerequisites or inputs for the 'get' operation.