This is a Web Application that only Javascript $_{\circ}~$ The topic is "TodoList" $_{\circ}~$

Skill:

forepart: Bootstrap, JQuery

back: Node.js, Koa

template engine: nunjucks

npm install node app.js

screenshot:

```
→ code ls
app.js
controllers
package.json static
controller.js model
package.json static-files.js views


→ code npm install

> fsevents@l.1.2 install /Users/orechou/Desktop/node_750_16/code/node_modules/fsevents
> node install

[fsevents] Success: "/Users/orechou/Desktop/node_750_16/code/node_modules/fsevents/lib/binding/Release/node-v51-darwin-x64/fse.node" is installed via remote npm Mark Todolists-APPBI_0.0 No repository field.

added 247 packages in 9.153s
→ code node app.js
The Web Serve is Running..
Process controller file: lello_js..
Register URL mapping: /hello/:name, method: GET
Register URL mapping: /list/dad, method: 905T
Register URL mapping: /list/dad, method: GET
Register URL mapping: /list/dade, method: P05T
Process controller file: login.js..
Register URL mapping: /list/delete, method: P05T
Process controller file: login.js..
Register URL mapping: /login, method: GET
Register URL mapping: /logo, method: GET
```


the use of APP screenshot:

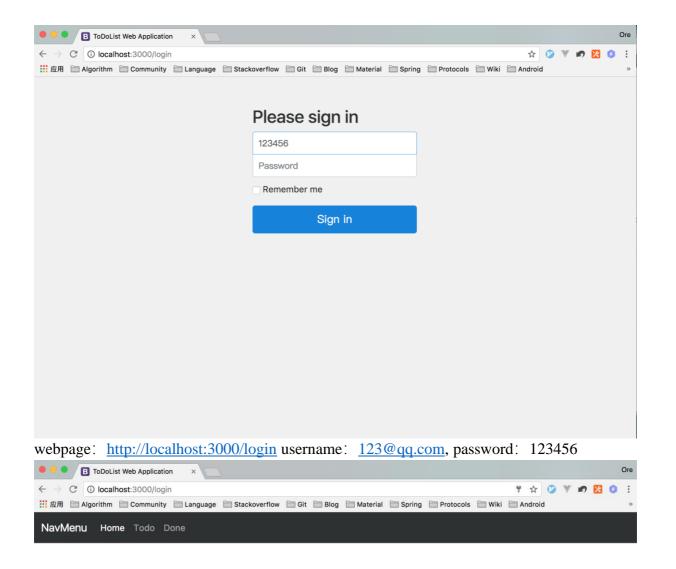


It is a ToDo list web application




Todo List

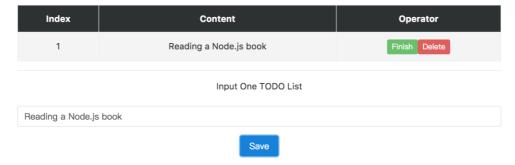

input a "todolist", click "Finish" to show "TODOlist" is done. "Delete" means to delete the "todolist".



Done List



the finished "todolist" will show on the "done list". (Tips: All data will be saved, restart the sever would delete the data)