

# A Cost-sensitive Algorithm with Local and Global Consistency

Weifeng Sun · Jianli Sun

Received: date / Accepted: date

**Abstract** Assuming that misclassification costs among different categories are equal, traditional graph based semi-supervised classification algorithms pursuit high classification accuracy. However, in many practical problems, misclassifying one category as another always leads to higher (or lower) cost than that in turn, such that, higher classification accuracy generally not means lower cost, which is more important in these problems. Cost-sensitive classification methods enable classifiers to pay more attention to data samples with higher cost, and then attempt to get lower cost by ensuring higher classification accuracy of the category with higher cost. In this paper, we bring cost sensitivity to local and global consistency (LGC) classifiers, and propose the CS-LGC (cost-sensitive LGC) methods, which can make better use of semi-supervised classification algorithms, and ensure high classification accuracy on the basis of reducing overall cost. At the same time, since the improved algorithm may bring some problems due to unbalanced data, we introduce the SMOTE algorithm for further optimization. Experimental results of bank loan and diagnosis problems verify the effectiveness of CS-LGC.

**Keywords** Graph based semi-supervised classification · Cost-sensitive · CS-LGC and CSS-LGC · SMOTE

---

Supported by the Natural Science Foundation of China under Grant No. 61471083, 61300017, the Fundamental Research Funds for Central Universities (DUT15QY28)

---

W. Sun  
School of Software, Dalian University of Technology  
DaLian, 116620 - China  
E-mail: wfsun@dlut.edu.cn

J. Sun  
School of Software, Dalian University of Technology  
DaLian, 116620 - China  
E-mail: sjl\_dlut@163.com

## 1 Introduction

Recently, machine learning classification algorithms have achieved sound development in multimedia identification, health care, finance, and many other applications. Among them, Graph-based Semi-Supervised Classification based on perfect graph theory, which is relatively straightforward and easy to understand, has become one of the hottest research focuses. This method can make better use of the information from labeled data and a great deal of data distribution information mined from unlabeled data, then solves the problem of the less labeled data and the huge labeling costs.

High classification accuracy is the target of GSSC algorithm, which assumes that the cost of misclassification among different categories is the same. However, in many practical problems, the costs of category classifications is different, especially in the fields of medical service, finance and network security and so on.

For example, in the bank loan problem, banks decide whether to approve the loan based on the loan applicants' personal information, which can be viewed as a binary classification problem. In the process of approving a bank loan, the cost of approving an applicant who is unable to repay the loan is much greater than that of approving an applicant who can repay the loan. Similarly, in the disease diagnosis, the cost of misdiagnose unhealthy patients as healthy is much greater than that of misdiagnose healthy patients as unhealthy. When the cost differences are inconsistent among different categories, a classifier paying more attention to the accuracy of higher cost classification problem is more practical than those treat all categories equally.

Cost-sensitive learning method [1–5] takes the inconsistencies of cost among categories into account to lower the overall cost for the target. This method defines the static cost matrix to make classifiers pay more concern to the sample data with higher cost, and improves classification accuracy of higher-cost category. In the semi-supervised classification problems, labels account for a small portion of the data and most data are unlabeled. Actually, the traditional semi-supervised classification treats all categories equally, which cannot guarantee a lower overall cost. Meanwhile, cost-sensitive learning may arise less fit due to limited data set of tags, which could lead to lower classifier accuracy and weaker generalization ability. Besides, in the semi-supervised learning, we often encounter the situation called uneven data problem, in which different types of samples have different numbers of labeled data.

In summary, researches on cost-sensitive semi-supervised classification algorithms for unbalanced datasets are of great significance to the development of finance, medical fields, network security and many other areas.

## 2 Related Work

The effectiveness of semi-supervised learning algorithm depends on the three assumptions: manifold hypothesis[6,7], mlustering hypothesis and smoothness hypothesis. GSSC based on manifold hypothesis builds a figure to describe the data, as well as the relationship between the data. In this figure, nodes represent the data samples while edges with weight represent the relationships between samples. At the same time, the larger the weight is, the higher the similarity of the samples

have. The process that GSSC classifiers assign labels to unlabeled data is the process of label propagation in the figure. Label Propagation Algorithm Budytyis et al. proposed in [8] can calculate the probability of transfer among tag data by the topology and the similarity between the samples in figure, and make a label transfer by combining node out-degree. A method of Gaussian fields and harmonic functions proposed by Zhu et al. in [9] that make discrete prediction function slack to become continuous prediction function considers the transfer probability samples fully and have a label transfer in  $k$ -connection diagram. Local and global consistency, LGC proposed by Zhou et al. in the [10] introduced clustering hypothesis and had a label transfer by using local and global consistency. LGC algorithm gives a rigorous mathematical logic derivation and proves the convergence. However, these related works never consider the problem of inconsistent classification cost.

Cost-sensitive learning method is an effective way to solve the problem of the inconsistency of costs. Cost-sensitive learning method introduces cost matrix to describe the inconsistency of costs among categories and get global minimum cost. The cost-sensitive classification methods can be divided into two categories: Rescale and Reweight, depending on the representations of cost. In the method of Rescale, differences in cost are described as differences among the numbers of samples, such as Cost-sensitive sampling[1], Rebalance[2] and Rescale new[3] etc. This method constructs different sample data sets according to the difference in costs which make classifiers' decision face prefer samples with more costly category. Reweight method describes differences in costs by differences in weight among samples of different types. In the method of Reweight, samples with costly category have a higher weight, which make a greater impact to classifier. MetaCost[4] is a typical representative of such Reweight methods. MetaCost based on Bayesian risk theory adds the cost of the sensitive nature for Non-cost-sensitive classification algorithm by using bagging[11].

AdaBoost algorithm was proposed in[12] which offers the possibility for multiple weak classifiers aggregating into a global strong classifier. AdaCost method[5] was proposed as a cost-sensitive classification algorithm based on AdaBoost. AdaCost is based on the Reweight at the same time, and introduces cost performance function for classifiers by heuristic strategy. AdaCost forces classifier to pay more attention to costly samples, hence it shows some advantages in cost-sensitive classification problems. However, cost performance function introduced in the theoretical analysis have not been verified and damages the most important characteristics of Boosting, which makes the algorithm not converge to the Bayesian decision. Qin etc. in [13] did try to combine semi-supervised classification algorithms with cost-sensitive learning methods, and improved classical EM algorithm by introducing misclassification cost in the process of probability assessment.

In this paper, we introduce cost-sensitive nature for LGC algorithm classic semi-supervised classification algorithm and propose a cost-sensitive LGC method (CS-LGC)

- (1) Advantages of many unlabeled data are fully taken
- (2) Propose CSS-LGC algorithm. We take the impact caused by unbalanced data into account for CS-LGC algorithm, and we propose optimized CS-LGC algorithm CSS-LGC algorithm.
- (3) Analyze the experimental threshold, and verify the rationality of the threshold.

- (4) Demonstrate the effectiveness of the algorithm by experiment on German Credit Data Set and Breast Cancer Data Set.

### 3 CSS-LGC Algorithm

#### 3.1 Problem Definition

Many problems can be described as binary classification problems (multiple class classification problems can be split into multiple binary classification problem), so this paper simply discusses binary classification problem. The two classes can be defined as positive class whose sample number is denoted as  $N_+$ , and negative class with the sample number denoted as  $N_-$ . We further assume  $C_{-+}$ , the cost that a sample in negative class is classified into positive class is much bigger than that in turn.  $X = \{x_1, x_2, \dots, x_l, x_{l+1}, \dots, x_{l+u}\}$  is a set of data samples, where  $l$  is the number of labeled data, and  $\{x_1, x_2, \dots, x_l\}$  forms the initial labeled data sets.  $u$  represents the number of unlabeled data, thus  $U = l + u$  denotes the total number of samples.  $x_i$  is a multidimensional vector of the  $i$ -th data with several features, which can be viewed as a point in higher dimensional space. Those data points and their relationships can be described by a fully connected graph  $G = (V, E)$ , where  $V \in R^{N \times P}$  represents the vertex set of  $G$ ,  $P$  is the feature value of each data sample. we have  $V = X$  here, and  $E$  is the edge set of  $G$ . Similarity among data points is important in classification, clustering and other machine learning fields. In LGC algorithm, similarity among data points is described by weight matrix  $W \in R^{N \times N}$ . Labeled data information is described by labeled information matrix  $Y \in L^{N \times 2}$ , where  $L = \{+1, -1\}$ . If data  $i$  belongs to category  $j$ , then  $Y_{ij} = 1$ , otherwise  $Y_{ij} = 0$ . The initial labeled information matrix only has a little labeled information.

Liu and Zhou mentioned that the cost of misclassification can be standardized in [14], which will not affect the best decision when calculation is simplified. In this paper, we let  $c_{+-} = 1$ , so  $c_{-+}$  is a real number larger than 1. In order to make semi-supervised classifier cost sensitive, We introduce sample cost information for the initial label matrix, denote cost difference using different initial labeled information volumes, and process the initial label matrix as Formula 1 shows:

$$YN_{,i} = T_0 \circ Y_{,i} \quad (1)$$

$N_{,i}$  indicates the  $i$ -th column of the processed initial label matrix.  $\circ$  indicates Adama product.  $T_0$  indicates the cost of sample data at the initial time. In addition

$$T_0(x_i) = \begin{cases} 1/N_+ & \text{if } x_i \text{ is positive class} \\ C_{-+}/N_- & \text{if } x_i \text{ is negative class} \end{cases} \quad (2)$$

CS-LGC method is designed to classify all data samples using the information of graph  $G$  with unknown  $Y$  and  $T_0$ . Our goal is to ensure unlabeled data to obtain class label as much as possible without changing the information of labeled data, and at the same time, minimize the global classification cost without damaging classification accuracy.

### 3.2 Algorithm Process

CS-LGC method is a boosting process that trains semi-supervised classifiers in each iteration and update labeled data set based on the performance of the classifiers. At the initial time, semi-supervised classifier  $h_0$  is trained using traditional LGC algorithm according to preprocessed initial label matrix, and we further calculate error rate by Formula 3.

$$\varepsilon_0 = \frac{\sum_{i=1}^N I(y_{i,h_0(x_i)} = 0)}{N} \quad (3)$$

Here  $I$  is a binary function, whose value is 1 if conditions are satisfied, or is 0 else.  $h_0(x_i)$  shows classification results for  $x_i$  at the initial time. Then according to the AdaBoost algorithm, cost information of misclassified samples increases while cost information of correctly classified samples decreases following Formula 4,

$$T_{t+1}(x_i) = \frac{T_t(x_i)}{Z_t} \times \begin{cases} e^{-\alpha_t} & \text{if } y_{i,h_t(x_i)} = 1 \\ e^{\alpha_t} & \text{if } y_{i,h_t(x_i)} = 0 \end{cases} \quad (4)$$

where  $T_{t+1}$  represents the updated cost matrix, and

$$Z_t = \sum_{i=1}^N T_t(x_i) \times \begin{cases} e^{-\alpha_t} & \text{if } y_{i,h_t(x_i)} = 1 \\ e^{\alpha_t} & \text{if } y_{i,h_t(x_i)} = 0 \end{cases} \quad (5)$$

where  $\alpha_t$  represents the weight of classifier  $h_t$  in the final global classification at time  $t$ , and can be calculated by

$$\alpha_t = \ln \left( \frac{1 - \varepsilon_t}{\varepsilon_t} \right) \quad (6)$$

The main objective of Cost-sensitive classifier is to minimize global classification. To avoid the impact of data set scale on the results, the calculation of global cost in our model use the mean cost method brought by Seiffert et al[15]. Since we have to standardize classification cost of our model, the corresponding mean cost needs to be updated according to Formula 7:

$$PEC = \frac{\#f_{pos} + \#f_{neg} \cdot C_{-+}}{\#t_{pos} + \#t_{neg} + \#f_{pos} + \#f_{neg}} \quad (7)$$

where  $PEC$  denotes the average cost of classifiers,  $\#t_{pos}$  and  $\#f_{pos}$  denote the number of positive class samples classified correctly and classified incorrectly respectively.  $\#t_{neg}$  and  $\#f_{neg}$  represent the corresponding information of negative class. The global cost we refer to here that is indeed the average cost. From Formula 7 we can see that the correct classified samples does not increase the global cost.

Next, we update the label matrix  $YN$  according to Rescale Method. Specifically, when the cost of  $x_i$  increases, means there is a wrong classification. Then a certain number of data that have the highest similarity with  $x_i$  are chosen from unlabeled data set and added into labeled data set. The class and cost information of the newly added data are the same with  $x_i$ . On the contrary, when sample data  $x_i$ 's cost decreases, and the decreasing range is larger than the threshold  $ts$ , then we will remove  $x_i$  and its label information from the labeled data set.

After then, we train the classifier of the next time according to updated label matrix and repeat the process until the global cost difference between two training time step is less than a certain threshold. Finally, a global classifier can be obtained by the way of weighted voting.

$$Y_{final}(x_i) = \text{sign} \left( \sum_{j=1}^M \alpha_j h_j(x_i) \right) \quad (8)$$

Here  $M$  denote the number of classifier when the iteration ends.

In summary, the process of CS-LGC method is shown in Algorithm 1:

---

**Algorithm 1** CS-LGC

---

**Input:** data set  $X$ , the initial label matrix  $Y$

- 1: add cost information for the initial label matrix according to Formula 1
- 2: **while**  $\Delta PEC \geq \text{threshold}$  **do**
- 3:   train LGC semi-supervised classifier
- 4:   update the cost matrix by Formal 4 according to the result
- 5:   update labeled data set applying Rescale Method
- 6:   update the initial label matrix according to Formula 1
- 7: **end while**

**Output:**  $Y_{final}(x_i) = \text{sign}(\sum_{j=1}^M \alpha_j h_j(x_i))$ ,  $PEC = \frac{\#f_{pos} + \#f_{neg} \cdot C_{-+}}{\#t_{pos} + \#t_{neg} + \#f_{pos} + \#f_{neg}}$

---

## 4 Improved CS-LGC Algorithm: CSS-LGC

### 4.1 Defect Analysis of CS-LGC Algorithm

Cost matrix will be updated every time after classifiers finishing training, which increases the corresponding cost information of incorrect classifications and that of correct classifications, forcing classifiers to pay more attention to the classification accuracy of high-cost samples.

### 4.2 CSS-LGC Algorithm Process

SMOTE algorithm generates virtual data through a synthetic way. For each minority category sample, the method looks for its  $k$  samples with the highest similarity. Then Upward sampling method is applied. If the amount of upward sampling samples is set as  $N$ , it randomly selects  $N$  samples from all  $k$  samples, which can be represented as  $x_i (i = 1, 2, \dots, N)$ , then conducts the linear interpolation between minority class  $x$  and  $x_i$ . Next, it constructs new minority samples  $p_1, p_2, \dots, p_N$  and

$$p_i = x + \text{rand}(0, 1) * (x_i - x), \quad i = 1, 2, \dots, N \quad (9)$$

The process of CSS-LGC algorithms is roughly same with CS-LGC, except the difference when CSS-LGC algorithm uses Rescale to update labeled data sets. In the CSS-LGC algorithm, after updating the cost matrix, Rescale is applied to update label matrix, then, it adds SMOTE method and optimizes the overall process of updating the label matrix. The specific implementation process is as follows:

**Algorithm 2 CCS-LGC****Input:** data set  $X$ , the initial label matrix  $Y$ 

- 1: add cost information for the initial label matrix according to Formula 9
- 2: **while**  $\Delta PEC \geq threshold$  **do**
- 3:   train LGC semi-supervised classifier
- 4:   update the cost matrix by Formula 4 according to the result
- 5:   update labeled data set applying Rescale Method
- 6:   update the initial label matrix according to Formula 1
- 7: **end while**

**Output:**  $Y_{final}(x_i) = \text{sign}(\sum_{j=1}^M \alpha_j h_j(x_i))$ ,  $PEC = \frac{\#f_{pos} + \#f_{neg} \cdot C_{-+}}{\#t_{pos} + \#t_{neg} + \#f_{pos} + \#f_{neg}}$ 

- 1) According to the change of cost matrix before and after the update, we determine the amount of required unlabeled data chosen in each category.
- 2) First of all, we get average similarity respectively for samples that have been marked as positive class from the remaining unlabeled data. Then we get the average similarity between the samples of each unlabeled and all samples that have been marked as positive class, denote them as  $p_1, p_2, \dots, p_u$ , where  $u$  represents the number of unlabeled samples. In the same way, we use all unlabeled data to get an average similarity for the samples that has been marked as negative class, which denoted as  $p'_1, p'_2, \dots, p'_u$ . Here  $p_1, p_2, \dots, p_u$  and  $p'_1, p'_2, \dots, p'_u$  are respectively calculated by Formula 10 and Formula 11,

$$p_j = \left( \sum_{i=1, Y_{i1}=+1}^l w_{(l+j)i} \right) / N_+, \quad j = 1, 2, \dots, u. \quad (10)$$

$$p'_j = \left( \sum_{i=1, Y_{i1}=-1}^l w_{(l+j)i} \right) / N_-, \quad j = 1, 2, \dots, u. \quad (11)$$

where  $N_+$  and  $N_-$ , respectively denote the number of the positive and negative samples in the data that have been marked,  $Y$  is the label matrix, and  $W$  is the weight matrix.

- 3) According to select unlabeled data, two conditions need meeting: first, the average similarity of unlabeled data must be closer to the class which will be marked as; Second, data with average similarity closer to this category unlabeled data should be chosen in accordance with descending order of average similarity and the number of unlabeled data to select calculated in the first step. At this time, it will have two cases:
  - a) The number of average similarity of unlabeled data closer to this class which will be marked as is enough, that is to say, we can find out enough samples from unlabeled data for this class.
  - b) There are few samples with average similarity closer to the class in the unlabeled data, namely, the number of unlabeled data with similarity to be marked in this class is littler than the other class, or only a small portion of data are more similar to this class.

If this is the first case, after completing marking the selected unlabeled data, we can simply exit the Rescale process, then update the initial label matrix in line with formula 1 and go on with the following study. Otherwise, as the second case occurs, we jump to the fourth step to process.

- 4) After making some artificial virtual data using SMOTE method, we jump to the second step, and continue conduct, until the number of artificially manufactured unlabeled data is more closer to the number that this class need to be marked, and when the number the number is abundant, jump to the process of the first case in step 3.

In the process of above, when synthesizing artificially data by using SMOTE algorithm for each minority class that need unlabeled data, instead of applying the method of upward sampling, our solution is to determine the number of unlabeled data to select according to the cost ratio of before to after updating. For instance, when the cost ratio is  $r(r > 1)$ , then the number of unlabeled data to select is  $r - 1$ . At this time, we need to choose  $r - 1$  samples from the  $k$  unlabeled samples with the highest similarity and do linear interpolation with minority class samples. The Fig 4.2 demonstrates the process of updating label matrix using the combination of Rescale method and SMOTE method in detail.

Through improving Rescale process of the CS-LGC algorithm, we solve the deflection of classification errors, which may accumulate in the unbalanced dataset and enhance the stability of classifiers' performance.

#### 4.3 Performance Analysis of CSS-LGC Algorithm

The increased time complexity by introducing cost sensitive feature to semi-supervised classification algorithm based on graph is mainly reflected in the process of boosting and updating cost matrix.

The aim of updating the cost matrix is to update the labeled data set, including adding new labeled data and deleting existing labeled data. The adding operation has a relatively higher time complexity, which reaches  $O(l \cdot n \lg n) < O(n^2)$ , where  $l$  is the number of labeled data. Besides, choosing the unlabeled data with high similarity, which can be seen as a sorting, has the time complexity of  $O(n \lg n)$ . The time complexity of boosting process is  $O(M \cdot n^3)$ , the time complexity of base-classifier LGC algorithm reaching  $O(n^3)$  included and  $M$  represents the number of base-classifiers. The time complexity of CS-LGC algorithm depends on the number of base-classifiers denoted as  $M$ . From the following experiments, we can know, in the problem of bank loan, disease diagnosis etc., the number of convergences in CS-LGC is not sufficient to make the classifier time complexity increased by one order of magnitude.

## 5 Experimental Results and Analysis

### 5.1 Data Introduction and Preprocessing

We choose bank loans and disease diagnosis, whose misclassification costs are inconsistent, to test our CS-LGC and CSS-LGC algorithm. Since the fact that CS-LGC is the improvement of LGC, we will verify whether CS-LGCs global cost will be reduced and whether its accuracy will be lowered compared with LGC. In addition, CS-LGC is a cost-sensitive classification method, so we will compare it with a traditional cost-sensitive algorithm, AdaCost algorithm, to see the performance difference between two algorithms.



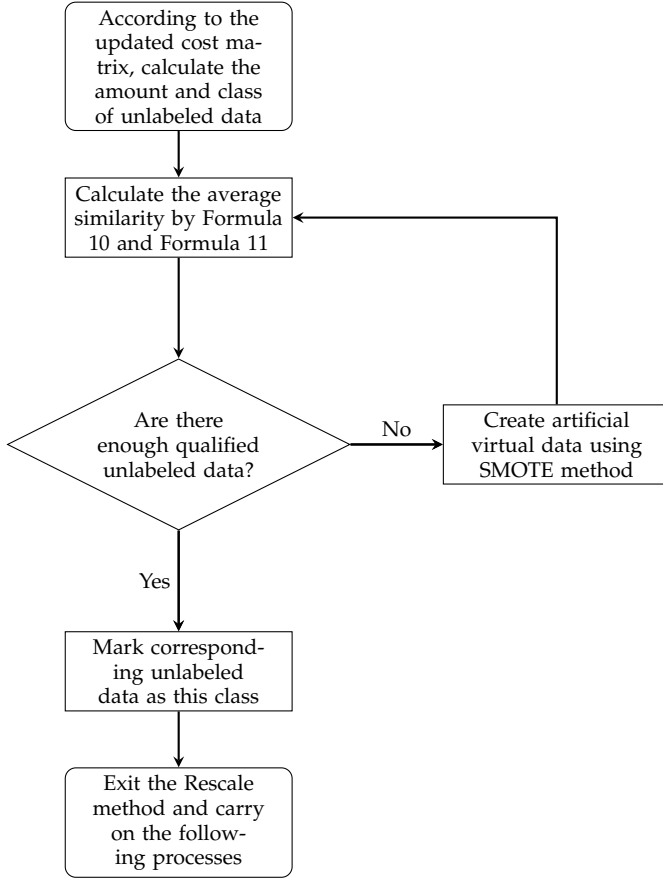


Fig. 1 The flowchart of updating label matrix using Rescale method in CSS-LGC algorithm

Cost-sensitive learning focuses more on sample data of high cost, so in this paper, we implement three experiments to verify the properties of CS-LGC and CSS-LGC: (1) the classification accuracy of high cost category changes with the labeled data; (2) the global classification accuracy changes with the labeled data; (3) the global cost changes with labeled data.

German Credit Data Set[16], which describes the information of bank loan applicants and whether the information of the relevant loan application is approved, was provided by Professor Hans Hofmann Et al. The data set collected 1000 loan applicants' information, including current deposit, borrowing time, fixed asset, working condition as well as whether they have guarantee and so on. There are 20 characteristic attributes in all. Finally, the applications of 700 person were approved while the other 300 applications weren't. We define the people who got the approvals as positive class, and those who did not as the negative class, then set  $C_{+-} = 1$ ,  $C_{-+} = 5$ , and initialize the cost of CS-LGC after standardizing process. Different features will represent in different value ranges, such as applicants' genders only have 0 and 1, two small value, while borrowing time could reach 48 (months) or even much larger. To eliminate this difference, feature values of characteristics for

the applicants should be linear normalized as Formula 12.

$$x_{ij}' = \frac{x_{ij} - x_{i\min}}{x_{i\max} - x_{i\min}} \quad (12)$$

$x_{ij}'$  denotes the results of the  $j$ -th attribute value of the  $i$ -th applicant after normalization,  $x_{i\max}$  and  $x_{i\min}$  respectively denote the maximum and minimum value in all attribute values of applicant  $i$ .

## 5.2 Threshold Discussion in CSS-LGC

These two thresholds need to be set in CS-LGC and CSS-LGC algorithm: The first one is  $ts$ , the decent degree threshold of sample data  $x_i$ 's cost. When the cost of  $x_i$  decreases more than  $ts$ , it will be deleted from the labeled data set. Another is  $threshold$ , the global cost difference threshold of classifier between two iterations, that is to say, When the global cost difference between two consecutive iterations is less than the  $threshold$  value, the classifier will stop iteration. Here, we only discuss about the  $threshold$  of CSS-LGC algorithm.

$threshold$  is set as 10% of the initial global cost. we verify the selection of the two thresholds of CSS-LGC using German Credit Data Set.

$ts$	Negative classification accuracy	Global classification accuracy	Global cost
0.05	0.546	0.7985	0.82205
0.1	0.6876	0.8035	0.60615
0.15	0.7946	0.8274	0.42896
0.2	0.8546	0.8293	0.33755
0.25	0.8937	0.8305	0.27675
0.3	0.9254	0.8327	0.22906
0.35	0.9348	0.8346	0.21394
0.4	0.9365	0.8348	0.21102
0.45	0.9367	0.8349	0.21052
0.5	0.946	0.835	0.1965
0.55	0.9463	0.8352	0.19591
0.6	0.9464	0.8352	0.19576
0.65	0.9465	0.8353	0.19554
0.7	0.9465	0.8353	0.19554
0.75	0.9465	0.8353	0.19554
0.8	0.9465	0.8353	0.19554
0.85	0.9465	0.8353	0.19554
0.9	0.9465	0.8353	0.19554
0.95	0.9465	0.8353	0.19554
1	0.9465	0.8353	0.19554

**Table 1** Impact and Analysis Table with  $ts$

### 5.2.1 $threshold$

In the above paper,  $threshold$  is 10. Two reasons support the setting: on the one hand, when it is 10, precision and the global cost are still within an acceptable range; On the other hand, although the corresponding results of threshold set as 6,7,8,9 are better than 10, they take much more time and converges slower.

<i>threshold</i>	Negative class classification accuracy	Global classification accuracy	Global cost
6	0.9546	0.85	0.1731
7	0.95186	0.845	0.18071
8	0.9486	0.8425	0.18735
9	0.947	0.839	0.1922
10	0.942	0.835	0.2025
11	0.935	0.83	0.2165
12	0.923	0.82752	0.23624
13	0.908	0.8247	0.26071
14	0.8967	0.8189	0.28172
15	0.8886	0.8135	0.29765

**Table 2** Impact and Analysis Table with *threshold*

### 5.3 Experimental Setting

The labeled data in this experiment are randomly selected from the data set. In order to observe the influence of the number of labeled data on classification results, We choose 10%, 20% ... 90% (increased by 10% at one time) data from the whole data set as the labeled. Then we design and run the experiments on Matlab R2010a. When updating the labeled data set following Rescale method, the cost of samples decrease by more than 50%, those samples will be removed from the labeled data set, that is to say, we set  $ts = 50\%$ . The termination criterion for the iteration of CS-LGC method is that the difference of global costs between the latest two iteration, which is the value of *threshold*, reaches 10% or less. The experimental settings of LGC method, Adacost algorithm and CS-LGC algorithm are the same as the CSS-LGC method. All the experimental data shown following are the average results of 50 times repeated experiments.

### 5.4 Experiment Results and Analysis

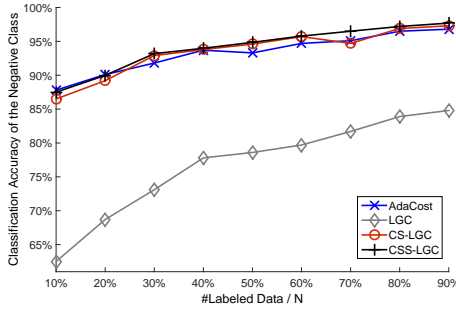
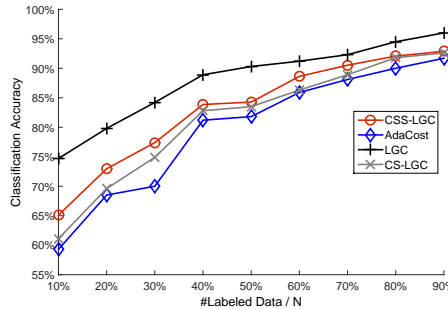
**Fig. 2** Changes in Classification Accuracy of Negative Class with Labeled Data Scale**Fig. 3** Changes in Classification Accuracy with Labeled Data Scale

Fig. 2 and Fig. 3 show the four algorithms - LGC, CS-LGC, AdaCost and CSS-LGC algorithm's high-cost class classification accuracy and global classification accuracy,

while Fig. 4 describes global cost variation curve, when the labeled data scale increases from only 10% to 90% of the total data volume respectively.

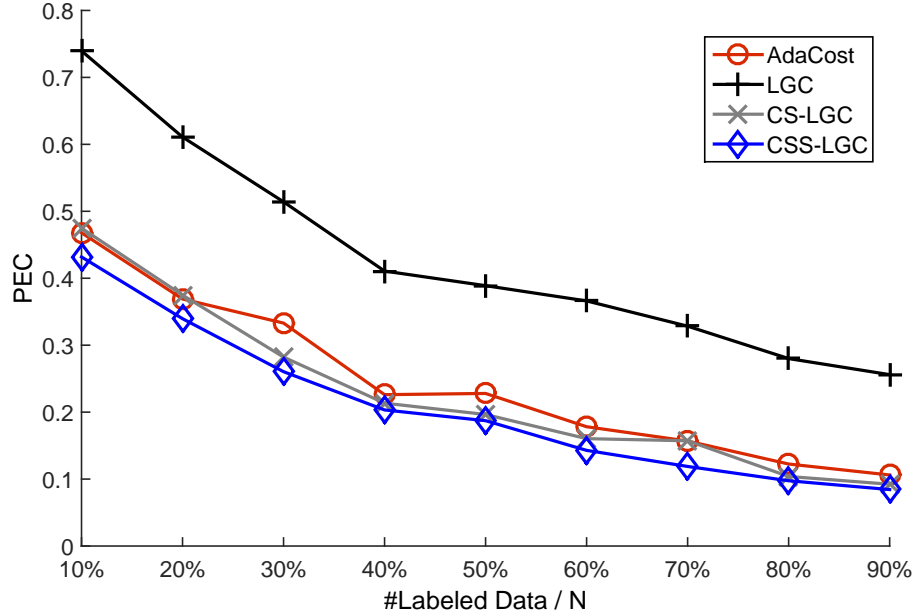


Fig. 4 Changes in PEC with Labeled Data Scale

From Fig. 2, Fig. 3 and Fig. 4, we can see, in the initial stage of data set training, there is little difference between CSS-LGC and CS-LGC algorithm. That is because in the beginning, the little amount of minority class samples do not work in the data set. At this time, there are enough unlabeled data for minority class can be chosen. But with the proceeding of the training, the number of unlabeled data is declining. Then the weakness of minority class data will be evident for the selection of unlabeled data using CS-LGC algorithm, which does not take the number of minority class samples into account. That will cause error accumulation, and undermine performance of CS-LGC algorithm. However, when the unlabeled data of minority class is trained by CSS-LGC algorithm, SMOTE algorithm introduced in works. And with the method of synthesizing, some virtual unlabeled data of weak minority are created. Then unlabeled data of minority class are continuously generated until conditions are met by comparison, which can be accepted by CS-LGC algorithm.

## 6 Conclusions

In this paper, we proposed CS-LGC algorithm that introduced cost sensitivity into classic semi-supervised classification algorithm based on AdaBoost method, and obtained better performance global classifier in the way of weighted voting for weak classifiers.

We take into account the defects that may be caused by imbalanced data set, improved CS-LGC algorithm and proposed CSS-LGC algorithm. In semi-supervised learning, CSS-LGC algorithm makes full use of a large number of unlabeled data. Considering heterogeneous distribution of misclassification cost in real life, cost sensitivity is introduced into LGC algorithm. In the process of label matrix update, CSS-LGC algorithm improves its comprehensive performance and generalization using SMOTE method that can eliminate the effect of imbalanced data sets. Therefore, CSS-LGC algorithm is practical and instructive in solving real-life problems.

However, CSS-LGC algorithm's performance will be compromised because similarity computation will appear more times and take more time to find out required unlabeled data in the Rescale process. Thus in our future work, we plan to simplify the calculation of average similarity, optimize SMOTE method and improve overall performance of CSS-LGC further.

## References

1. Y. Gao and J. Wang, "Active learning method of bayesian networks classifier based on cost-sensitive sampling," in *Computer Science and Automation Engineering (CSAE), 2011 IEEE International Conference on*, vol. 3, pp. 233–236, IEEE, 2011.
2. C. Elkan, "The foundations of cost-sensitive learning," in *International joint conference on artificial intelligence*, vol. 17, pp. 973–978, Citeseer, 2001.
3. Z.-H. Zhou and X.-Y. Liu, "On multi-class cost-sensitive learning," *Computational Intelligence*, vol. 26, no. 3, pp. 232–257, 2010.
4. P. Domingos, "Metacost: A general method for making classifiers cost-sensitive," in *Proceedings of the fifth ACM SIGKDD international conference on Knowledge discovery and data mining*, pp. 155–164, ACM, 1999.
5. W. Fan, S. J. Stolfo, J. Zhang, and P. K. Chan, "Adacost: misclassification cost-sensitive boosting," in *ICML*, pp. 97–105, 1999.
6. R. Urner, S. Shalev-Shwartz, and S. Ben-David, "Access to unlabeled data can speed up prediction time," in *Proceedings of the 28th International Conference on Machine Learning (ICML-11)*, pp. 641–648, 2011.
7. Z.-H. Zhou and M. Li, "Semi-supervised learning by disagreement," *Knowledge and Information Systems*, vol. 24, no. 3, pp. 415–439, 2010.
8. I. Budvytis, V. Badrinarayanan, and R. Cipolla, "Label propagation in complex video sequences using semi-supervised learning," in *BMVC*, vol. 2257, pp. 2258–2259, Citeseer, 2010.
9. X. Zhu, Z. Ghahramani, J. Lafferty, et al., "Semi-supervised learning using gaussian fields and harmonic functions," in *ICML*, vol. 3, pp. 912–919, 2003.
10. D. Zhou, O. Bousquet, T. N. Lal, J. Weston, and B. Schölkopf, "Learning with local and global consistency," *Advances in neural information processing systems*, vol. 16, no. 16, pp. 321–328, 2004.
11. T. M. Khoshgoftaar, J. Van Hulse, and A. Napolitano, "Comparing boosting and bagging techniques with noisy and imbalanced data," *Systems, Man and Cybernetics, Part A: Systems and Humans, IEEE Transactions on*, vol. 41, no. 3, pp. 552–568, 2011.
12. X. Jin, X. Hou, and C.-L. Liu, "Multi-class adaboost with hypothesis margin," in *Pattern Recognition (ICPR), 2010 20th International Conference on*, pp. 65–68, IEEE, 2010.
13. Z. Qin, S. Zhang, L. Liu, and T. Wang, "Cost-sensitive semi-supervised classification using cs-em," in *Computer and Information Technology, 2008. CIT 2008. 8th IEEE International Conference on*, pp. 131–136, IEEE, 2008.
14. X.-Y. Liu and Z.-H. Zhou, "The influence of class imbalance on cost-sensitive learning: An empirical study," in *Data Mining, 2006. ICDM'06. Sixth International Conference on*, pp. 970–974, IEEE, 2006.
15. C. Seiffert, T. M. Khoshgoftaar, J. V. Hulse, and A. Napolitano, "A comparative study of data sampling and cost sensitive learning," in *Data Mining Workshops, 2008. ICDMW'08. IEEE International Conference on*, pp. 46–52, IEEE, 2008.
16. H. Hofmann, "German credit data," 2000.
17. O. L. Mangasarian and W. H. Wolberg, "Cancer diagnosis via linear programming," *SIAM News*, vol. 23, pp. 1–18, sep 1990.