ESync: An Efficient Synchronous Parallel Algorithm for Distributed ML in Heterogeneous Clusters

Anonymous Author(s)

Affiliation Address email

Abstract

In recent years, researchers have paid more attention to distributed machine learning to train large-scale models with mass data in parallel, which is much more efficient than training on a single machine. Classical synchronous / asynchronous parallel algorithms (such as SSGD and ASGD) achieve excellent performance in aggregating model updates from devices in large-scale isomorphic clusters, however, these algorithms are not suitable in heterogeneous clusters, which consist of devices with different computing capabilities. This paper proposes *ESync*, an efficient synchronous parallel algorithm which allows devices in heterogeneous clusters to take full use of their computing capabilities while waiting for the straggling devices, meanwhile achieves the accuracy of SSGD and the training speed of ASGD with lowest traffic load. We evaluate *ESync* on a heterogeneous cluster with Intel E5-2650v4 CPUs and GTX 1080TI GPUs, and find that *ESync* achieves 27× training speedup to SSGD without loss of accuracy on AlexNet and achieves the state-of-the-art performance in both i.i.d. and non-i.i.d. data distributions.

1 Introduction

2

3

6

8

9

10

11

12

13

14

30

31

32

33

34

Massive data and large-scale machine learning models contributed a lot for the rapid development of 16 Artificial Intelligence. In recent years, researchers have paid more attention to distributed machine 17 learning to train large-scale models with mass data in parallel, which is much more efficient than 18 training on a single machine. For example, Jia, Xianyan, et al.[1] trained ResNet-50 on ImageNet 19 dataset with 2048 Tesla P40 GPUs and achieved 75.8% top-1 test accuracy in only 6.6 minutes. The 20 training process of a standard distributed machine learning algorithm in synchronous mode can be 21 divided into three steps: (1) Each device calculates model updates with local data independently; (2) Aggregate all the model updates and broadcast to all devices; (3) Update model parameters with aggregated model updates. Synchronous SGD (SSGD)[2] requires all the devices to aggregate model 24 updates at the same pace, and devices with strong computing capabilities are blocked to wait for the 25 straggling devices, which leads to waste of computational resources. Therefore, SSGD is preferred in 26 isomorphic, stable and reliable clusters, in which devices have similar computing capabilities. 27

With the rapid development of GPU, TPU, FPGA, ASIC and other powerful computational resources, replacing all the old computing devices has become impractical and costly for enterprises and research institutes. Therefore, clusters are usually equipped with computing devices of different types and manufacturers, which leads to difference in computing capabilities among devices. Besides, Federated Learning[3] supports cooperative training of millions of edge devices, such as mobile phones, smart watches, cameras and sensors, and the diversity of edge devices makes the heterogeneity of clusters much more significant.

The heterogeneity of clusters severely limits the training efficiency of SSGD to the weakest device, which causes the "Short Board" problem and results in inefficient training, low data throughput and

great waste of computational resources. A natural idea to balance the computing time of each device in heterogeneous clusters is processing more samples while waiting for other devices, i.e. set larger batch size for devices with stronger computing capabilities. However, large batch size causes loss of accuracy[4]. In our preliminary experiments, we find that simply increase batch size according to the computing capability can not accelerate convergence, and probably lead to a decline in accuracy.

Asynchronous parallel algorithms (e.g. ASGD[5]) show strong adaptability to the heterogeneity of clusters (the performance reduction or failure of one device will not block other devices), but they 43 also introduce "Delayed Gradient" problem, which uses outdated model updates to update the latest 44 model, resulting in a decline in accuracy and an increase in the number of training iterations. Some 45 researchers have analyzed the negative effect of delayed gradient to the convergence [6] [7] [8] and tried 46 to improve ASGD from different perspectives to suppress the effect of delayed gradient on model 47 accuracy, such as penalizing delayed gradient by well-designed learning rate[9][10], compensate 48 delayed gradient[11], and control the difference of iterations[12]. However, these approaches will be 49 difficult to meet the training and convergence requirements in clusters with strong heterogeneity, and ultimately lead to inefficient training and loss of accuracy.

52

53

54

55

57

58

59

60

61

63

64

65

66

67

73

74

75

76

77

78

79

80

81

82

To solve the "Short Board" problem and improve the training efficiency without loss of accuracy in heterogeneous clusters, we tackle the challenge of "Short Board" problem based on synchronous parallel algorithms directly to avoid the introduction of delayed gradient, instead of continuing to alleviate the negative effect caused by delayed gradient. This paper introduces ESync, an efficient synchronous parallel algorithm which allows devices in heterogeneous clusters to take full use of their computing capabilities while waiting for the straggling devices. The key idea of ESync is to produce higher quality model updates that have a long-term vision while waiting for other devices. In each communication round, each device holds the same global model, saves an additional replica of the global model, and trains the replica for n_i iterations (on device i) via SGD (or other optimization algorithms) with local data. When all devices are ready, they calculate model updates based on difference between the global model and the latest replica, and send model updates to other devices to perform aggregation. Finally, the aggregated model updates are averaged and used to update the global model. The challenge of ESync is to assign the number of local iterations n_i to device iautomatically according to the changing computing capabilities. To this end, ESync introduces State Server to coordinate the devices by ensuring that when the slowest device completes a local iteration, other devices have completed local iterations as many times as possible.

We evaluate ESync on a heterogeneous cluster with Intel E5-2650v4 CPUs and GTX 1080TI GPUs. Results show that ESync realizes a good balance of computing time among devices, achieves $7\times$ training speedup to SSGD on ResNet (up to $27\times$ on AlexNet) without loss of accuracy, processes $33\times$ more samples per second than SSGD, transmits $4\times$ less data per second than ASGD, and achieves the state-of-the-art performance in both i.i.d. and non-i.i.d. data distributions.

Contributions. To the best of the authors' knowledge, we propose the first efficient synchronous parallel algorithm to solve the "Short Board" problem in heterogeneous ML clusters. To sum up, the main contributions of this paper are as follows: (1) We introduce *ESync*, an efficient synchronous parallel algorithm that solves the "Short Board" problem, and greatly increases training speed without loss of accuracy; (2) We introduce State Server to assign the number of local iterations for each device automatically and dynamically, which provides fine-grained control over devices in dynamic clusters; (3) We provide a solution to take full use of the computing capabilities of the devices in heterogeneous clusters with lowest traffic load; (4) We provide a solution that allows aggregation operations to be performed in a synchronous manner in heterogeneous clusters, and supports many efficient collective communication algorithms (e.g. Ring Allreduce[13], Butterfly[14]).

The organization of this paper is as follows. In Section 2, we discuss the "Short Board" and "Delayed Gradient" problems and related work to improve them, and reveal the limitations of these work in heterogeneous clusters. In Section 3, we describe the *ESync* algorithm and analyze its convergence. In Section 4, we discuss the design of State Server and propose a scheme for harsh communication environment. In Section 5, we evaluate *ESync* and compare its training speed, accuracy, data throughput, traffic load, computing time ratio with SSGD, ASGD and DC-ASGD. Finally, we conclude this paper and delineate several promising directions for future research in Section 6.

2 Related Work

91

92

93

94

95

97

98

99

100

101

102

103

104

105

106

107

108

111

112

113

114

115

116

Short Board. In Synchronous SGD (SSGD)[2], devices calculate model updates independently with local data, and push these model updates to other devices to perform aggregation. By using a barrier, devices with strong computing capabilities need to wait until other devices reach the barrier, which makes computational resources idle for a long time and causes the "Short Board" problem. To improve the training efficiency, Dean, Jeffrey, et al.[5] propose Asynchronous SGD (ASGD), which allows devices to perform computation and aggregation in different pace, with no need to wait for model updates from other devices. ASGD solves the "Short Board" problem and accelerates the training speed significantly. However, ASGD also introduces delayed gradient, which reduces the accuracy and convergence of the model, and the effect will be more serious when the difference in computing capabilities among devices is large in non-i.i.d. data distribution.

Delayed Gradient. ASGD updates model $w_{t+\tau}$ with outdated model updates $g(w_t)$, resulting in mismatches between model and model updates, and causes undesirable damage to the accuracy and convergence. Ho, Qirong, et al.[12] propose Stale Synchronous Parallel (SSP) to make a tradeoff between accuracy and training speed by allowing the fastest device to be ahead of the slowest device by up to a bounded number of iterations τ . However, SSP still apply the outdated model updates to update the latest model and staleness still exist during the training process, eventually, SSP will degenerate into Bulk Synchronous Parallel (BSP)[15] with staleness in heterogeneous clusters when all other devices reach the threshold $t+\tau$ and blocked to wait for the slowest device, which makes the problems of "Short Board" and "Delayed Gradient" worse. McMahan[9] proposes AdaptiveRevision and Sra, Suvrit, et al. [10] propose Adadelay to penalize the delayed gradient by well-designed learning rate, but these approaches suppress the contributions of data on the straggling devices, which leads to unexpected loss of accuracy when the difference of steps is large. Zheng, Shuxin, et al.[11] propose DC-ASGD, which leverages the first-order term of Taylor expansion of the gradient function and approximates the Hessian matrix of the loss function to compensate delayed gradient, but its convergence requirements will be difficult to satisfy in clusters with strong heterogeneity, for the value of the high-order term $O((w_{t+\tau}-w_t)^2)I$ may be large and can not be ignored.

Although the derivative ASGD algorithms (e.g. DC-ASGD) alleviate the decline of accuracy and convergence caused by delayed gradient, they still require a long time to converge to the accuracy of sequential SGD in heterogeneous clusters. Instead, *ESync* tackles the challenge of "Short Board" problem from an innovative perspective, i.e. optimizes based on synchronous parallel algorithms directly to avoid the introduction of delayed gradient, and utilizes the blocking time of aggregation operations to generate more valuable model updates.

123 3 The ESync Algorithm

Consider training a classification task on a heterogeneous cluster with p devices, and dataset are distributed on these devices $D = \{D_1, D_2, ..., D_p\}$. For each dataset D_i on device i, we define the local loss l_i as:

$$l_i = \frac{1}{|D_i|} \sum_{(x_j, y_j) \in D_i} L(F(x_j, w), y_j)$$
(1)

where $|\cdot|$ denotes the size of the dataset, (x_j, y_j) denotes the data and label of the j-th sample in dataset D_i , $(F(\cdot), w)$ denotes the forward function and parameters of the model, and $L(\cdot)$ denotes the loss function. The global loss function on the distributed dataset can be defined as:

$$l = \frac{\sum_{i=1}^{p} |D_i| \cdot l_i}{|D|} \tag{2}$$

Our goal is to minimize the global loss l, i.e. to find the optimal shared parameters w^* :

$$w^* = \arg\min_{w} l_i \qquad i = 1, 2, ..., p$$
 (3)

Gradient-descent techniques such as SGD is often used to solve such optimization problems. In this paper, we take mini-batch SGD as an example for simplicity, and it can be easily replaced by other optimization algorithms.




Figure 1: Overview of Sync (left) and ESync (right) within a communication round.




Figure 2: Training process of ESync.

3.1 Algorithm Modeling

134

157

Distributed machine learning tasks can be considered as a treasure hunt game with multiple explorers. In standard synchronous parallel algorithms (e.g. SSGD), each explorer shares one discovery in every step, and the explorers are forced to wait until all of them have a discovery. Instead, *ESync* allows experienced explorers to explore as many steps as possible, and share their discoveries when the freshmen are ready. An illustration of Sync and *ESync* within a communication round is shown in Figure 1, and the training process of *ESync* is shown in Figure 2.

We define the global model at the t-th communication round as w_t , and the replica of w_t at device i after k local iterations as $w_{t,k}^i$. w_0 is random initialized and shared by all devices. For t>0, each device keeps the same global model w_t at the beginning, and saves a replica $w_{t,0}^i$ at device i:

$$w_{t,0}^i \leftarrow w_t \tag{4}$$

Step1: State Query. We introduce State Server to support state query, which decides whether devices should perform aggregation or continue training locally at the beginning of each local iteration. The State Server assigns the number of local iterations n_i for device i implicitly, where n_i is the number of times signal *NOT-READY* is received during a communication round.

Step2: Training Locally. For each local iteration $k(1 \le k < n_i)$, we sample a small batch data $D_e = \{(x_{i_1}, y_{i_1}), (x_{i_2}, y_{i_2}), ..., (x_{i_b}, y_{i_b})\}$ from dataset D_i in random, calculate gradients and apply SGD to update the model replica $w_{t,k}^i$:

$$w_{t,k+1}^{i} \leftarrow w_{t,k}^{i} - \eta \nabla_{w} \frac{1}{b} \sum_{(x_{j}, y_{j}) \in D_{e}} L(F(x_{j}, w), y_{j})$$
 (5)

where η denotes the local learning rate, and b denotes the batch size. We can easily replace SGD with other optimization algorithms (e.g. Momentum, RMSProp, Adam) by modifying Formula (5).

Step3: Aggregation. When device i completes local iterations for n_i times, calculates the model updates based on difference between the latest replica w_{t,n_i}^i and the global model w_t :

$$\Delta w_t^i = w_{t,n_i}^i - w_t \tag{6}$$

then model updates Δw_t^i are sent to other devices to perform aggregation, and the aggregated model updates Δw_t are retrieved to each device to update the global model w_t :

$$\Delta w_t = \frac{1}{p} \sum_{i \in \{1, 2, \dots, p\}} \Delta w_t^i \tag{7}$$

$$w_{t+1} = w_t + \epsilon \Delta w_t \tag{8}$$

where ϵ denotes the global learning rate and can be simply set to 1.

Algorithm 1 ESync $(D_i, T, p, \eta, b, r, \epsilon = 1)$

Input: Dataset $D_i = \{(x_1, y_1), (x_2, y_2), ..., (x_d, y_d)\}$; Maximum number of global iterations T; Number of devices p; Local learning rate η ; Batch size b; Device id r; Global learning rate ϵ (optional, the default value is 1). 1: RANDOM-INITIALIZE-MODEL-PARAMETERS (w_0, r) ; 2: INITIALIZE-STATE-SERVER (p, ε) ; 3: $c \leftarrow RUN\text{-}BATCH\text{-}DATA\text{-}TEST(b)$; 4: $t_e \leftarrow GET\text{-}CURRENT\text{-}TIME()$; 5: $t \leftarrow 0$; $k \leftarrow 0$; 6: $w_{0,0}^r \leftarrow w_0$; 7: while $t \leq T$: $ready \leftarrow QUERY-STATE(r, k, c, t_e);$ 9: if not ready: $t_s \leftarrow GET\text{-}CURRENT\text{-}TIME();$ 10: $data \leftarrow GET\text{-}NEXT\text{-}RANDOM\text{-}MINIBATCH(b);$ 11: $gradients \leftarrow COMPUTE\text{-}AVERAGE\text{-}GRADIENTS(w_{t,k}^r, data);$ 12: $\begin{aligned} w^r_{t,k+1} \leftarrow w^r_{t,k} - \eta \cdot gradients; \\ t_e \leftarrow \textit{GET-CURRENT-TIME}(); \end{aligned}$ 13: 14: $c \leftarrow t_e - t_s;$ 15: $k \leftarrow k + 1$; 16: else: 17: $\Delta w_t^r \leftarrow w_{t,k}^r - w_t;$ 18: $aggregated_updates \leftarrow GLOBAL\text{-}SUM\text{-}UPDATES(r, \Delta w_t^r);$ 19: 20: $w_{t+1} \leftarrow w_t + \epsilon \cdot aggregated_updates/p;$ $t \leftarrow t + 1;$ 21: $\begin{array}{l} w_{t,0}^r \leftarrow w_t; \\ k \leftarrow 0; \end{array}$ 22: 23: $t_e \leftarrow \textit{GET-CURRENT-TIME}();$ 24: 25: RESET-STATE- $SERVER(r, t, t_e);$ **Output:** Trained model parameters w_t .

The pseudo-code of *ESync* is shown in Algorithm 1. We can implement the aggregation operation *GLOBAL-SUM-UPDATES* at line 19 based on Parameter Server or MPI Allreduce, and apply compression technologies to reduce the amount of data that needs to be transmitted.

3.2 Convergence Analysis

160

161

162

In this section, we analyze the convergence of *ESync* and compare with the standard synchronous mini-batch SGD[16]. Assume the number of local iterations of p devices are $\{n_1, n_2, ..., n_p\}(n_i \ge 1, n_i \in \mathbb{Z})$. To simplify the analysis, we consider *ESync* as a synchronized algorithm that performs $\bar{n} = \frac{1}{p} \sum_{i=1}^{p} n_i$ local iterations on each device and $b\bar{n}p$ divides m without loss of generality.

Proposition 1. Let L(w,z) be a loss function with L-smooth convexity, and assume that the variance of the stochastic gradient $\nabla_w L(w,z)$ is bounded by σ^2 for all $w \in W$ and $z \in Z$. If the update rule has the serial expected optimality gap bound $\tilde{\psi}(\sigma^2,m) = \frac{1}{m}\psi(\sigma^2,m)$ when processed m samples, the expected optimality gap bound of Algorithm 1 is

$$\tilde{\psi}(\frac{\sigma^2 \bar{n}}{bp}, \frac{m}{b\bar{n}p}) \tag{9}$$

specially, given $\psi(\sigma^2,m)=2D^2L+2D\sigma\sqrt{m}$, and Formula (9) is equal to

$$\frac{2b\bar{n}pD^2L}{m} + \frac{2D\sigma\bar{n}}{\sqrt{m}} \tag{10}$$

Proof of Proposition 1 is given in Appendix A. We can see that the bound of ESync is asymptotically equivalent to the bound of standard synchronous mini-batch SGD $O(\frac{1}{m} + \frac{1}{\sqrt{m}})$, which ensures that ESync can converge to the same accuracy as SSGD. Besides, ESync alleviates the "Large Batch Training" problem (larger batch size often leads to lower test accuracy)[4] by expanding the variance of the stochastic gradients by n_i times on each device.

4 State Server

We introduce State Server, which can be deployed on any devices, to assign the number of local iterations n_i for each device automatically and dynamically. The main idea is that, when the slowest device completes a local iteration, other devices have completed local iterations as many times as possible. The State Server is the key to solve the "Short Board" problem, and a good design for State Server can significantly reduce the blocking time of the aggregation operations.

4.1 State Query

183

200

Considering that computing capability may change, the State Server does not inform device i of its number of local iterations n_i directly. Instead, devices query the State Server whether they should perform aggregation or continue training locally in each iteration. This approach provides fine-grained control over devices in dynamic clusters, such as multi-tenant clusters and edge devices in Edge AI.

A simple but inefficient way is to perform aggregation when all devices complete at least one local iteration. Suppose there are two straggling devices A and B with the same computing capabilities. Although A and B complete computations at the same time, there will be a device that first reports to the State Server, and the device reports first (A) will continue training locally but the latter (B) starts to perform aggregation and then be blocked. Therefore, the "Short Board" problem is not solved because other devices still need to wait until A finishes its new iteration.

A better way is to perform aggregation when the querying device can not finish new iteration before the slowest device is ready. The pseudo-code of *QUERY-STATE* on State Server is shown in Algorithm 2. Assume the computing capabilities (time to process b samples) of p devices are $\{c_1, c_2, ..., c_p\}(c_1 \ge c_2 \ge ... \ge c_p > 0)$, and ε is a small constant to avoid boundary error. We can guarantee that the blocking time of the aggregation operation is less than c_p (0.03 seconds in our experiments), which is negligible compared to the slowest device (3.5 seconds in our experiments).

Algorithm 2 State-Server

```
1: procedure OUERY-STATE(r, k, c, t_e):
         /\!/ Record Format: (rank, local\_iterations, capability, last\_finish\_time, ready, round).
 3:
         Update record current (rank r) to (r, k, c, t_e, -1, -1), where -1 means unchanged;
 4:
         slowest \leftarrow FIND\text{-}SLOWEST\text{-}DEVICE();
 5:
         if k == 0 or slowest has not complete the PULL operation yet:
 6:
               return false;
         current \ time \leftarrow GET\text{-}CURRENT\text{-}TIME();
 7:
 8:
         rest\ time \leftarrow slowest.get\ capability() - current\ time + slowest.get\ last\ finish\ time();
 9:
         if current == slowest or slowest is ready or current.get capability() +\varepsilon > rest time:
10:
               current.set ready(true);
11:
               return true;
         return false;
12:
```

4.2 Non-Blocking Mode with Delayed ACK

Considering that the clusters may be in a network with high communication delay, and the blocked 201 state query operation forces the devices to wait until the State Server responds signal READY or 202 NOT-READY, which causes great waste of computational resources. Besides, the available network 203 resources may be heterogeneous and dynamic, and the difference of communication delay introduces 204 noise to the State Server. 205 We redefine capability c_i as the time to process b samples and the RTT of state query operation on 206 device i to address both the difference of computing and communication capabilities, and allow 207 devices to continue training locally while waiting for the response from the State Server to avoid 208 waste of computational resources. We assume that implicit NOT-READY ACKs are received by 209 default after sending state query requests, and devices continue training locally until an explicit 210 READY ACK is received. When READY ACK of the k-th iteration is received, each device aborts the 211

 $k + \delta - 1$, where $\delta - 1$ is the number of local iterations that can be completed in RTT time.

current $(k + \delta)$ -th iteration immediately and starts to perform aggregation based on iterations 1 to

Experiments

The experimental platform is built on MXNet[17], a flexible and efficient library for deep learning, and supports distributed deep learning by Parameter Server. We implement the aggregation operation on Parameter Server and an open source communication library PS-LITE. In this implementation, devices push model updates to the centralized KVStore to perform aggregation, and then pull aggregated model updates to local memory to update the model. We can also select MPI Allreduce algorithms to perform aggregation according to the number of devices, physical topology and size of the model. Besides, quantization and sparsification techniques can be used to accelerate communication, such as 1-bit SGD[18] and DGC[19]. We evaluate *ESync* on a heterogeneous cluster with Intel E5-2650v4 CPUs and GTX 1080TI GPUs, and compare its training speed, test accuracy, data throughput, traffic load, computing time ratio with SSGD, ASGD and DC-ASGD.

We set learning rate to 0.0005 and batch size to 64, and apply mini-batch SGD for all experiments. We plot the curves of test accuracy over time, count the number of samples processed and the amount of data transmitted per second, and count the total time of computing and communication. Furthermore, we define the speedup as the time ratio to achieve test accuracy 0.8 that is close to the convergent accuracy, and the computing time ratio as proportion of total computing time to total training time.

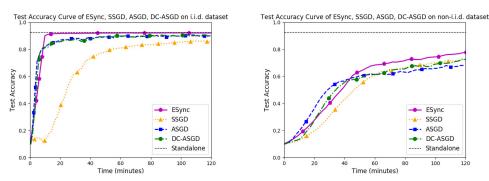


Figure 3: Test accuracy curve on i.i.d and non-i.i.d. Fashion-MNIST dataset.

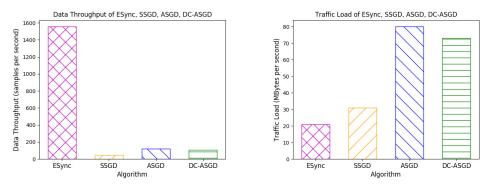


Figure 4: Data throughput and traffic load per second.

Test accuracy and training speed. We distribute the classic Fashion-MNIST[20] dataset to each device in i.i.d. and non-i.i.d. data distributions and train ResNet[21] respectively. Results show that ESync increases training speed greatly without loss of accuracy and achieves the state-of-the-art performance in both settings. As shown in Figure 3, while training on i.i.d. dataset, ESync achieves similar training speed as ASGD and DC-ASGD and $7\times$ speedup to SSGD, meanwhile achieves the test accuracy of sequential SGD in the shortest time. Furthermore, while training on non-i.i.d. dataset, ESync trains faster than SSGD without loss of accuracy while the accuracy of ASGD is impaired.

Data throughput and traffic load. *ESync* enables heterogeneous clusters to process data more efficiently, meanwhile minimizes traffic load in network. As shown in Figure 4, *ESync* trains $33 \times$ more samples than SSGD and $13 \times$ more samples than ASGD per second, however, only 1/4 of the data need to be transmitted per second compared to ASGD. The reason is that *ESync* performs multiple iterations locally, which increases data throughput and reduces the number of communication.

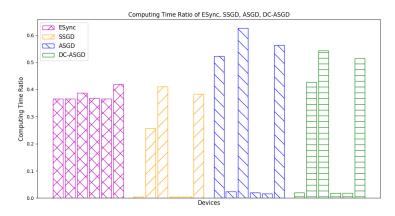


Figure 5: Computing time ratio on each device.

Computing time. ESync improves the utilization rate of computing power on devices with strong computing capabilities significantly. As shown in Figure 5, SSGD takes too much time waiting for straggling devices, ASGD takes little time on computing but always in communication, and DC-ASGD takes much time in compensating delayed gradient on the parameter servers (which results in throughput, traffic load and computing time reduction compared with ASGD). Instead, ESync realizes a good balance of computing time among devices, and enables devices with strong computing capabilities to make full use of their computational resources while waiting for the straggling devices.

We compare the speedup of *ESync* to SSGD and the test accuracy with sequential SGD on several classic models, as shown in Table 1. Results show that *ESync* can accelerate the training process greatly and achieve the same (sometimes higher) accuracy as sequential SGD.

Table 1: Speedup and accuracy of ESync on different models.

Model	Speedup	Test Accuracy	
		ESync	Standalone
AlexNet	27×	0.929	0.928
Inception-v3	$7 \times$	0.937	0.932
ResNet-18-v1	$7 \times$	0.926	0.926
ResNet-50-v1	$4 \times$	0.914	0.910
ResNet-50-v2	$6 \times$	0.918	0.920
MobileNet-v1	$2\times$	0.903	0.902

6 Conclusion

This paper proposes *ESync*, an efficient synchronous parallel algorithm which allows devices in heterogeneous clusters to take full use of their computing capabilities while waiting for the straggling devices, meanwhile achieves the accuracy of SSGD and the training speed of ASGD with lowest traffic load. We introduce State Server to assign the number of local iterations for each device automatically and dynamically, aim to solve the "Short Board" problem in heterogeneous and dynamic clusters. Specially, *ESync* allows aggregation operations to be performed in a synchronous manner in heterogeneous clusters, and provides users with flexibility in selecting different collective algorithms and communication topologies according to the characteristics of tasks and network (e.g. star topology of Parameter Server, ring topology of MPI Ring Allreduce, hierarchical hybrid topologies, and even user-defined topologies).

In future work, we are going to design a mechanism based on *ESync* that supports user-defined communication mode (includes communication topologies and collective algorithms), and propose an algorithm for automatic communication mode design based on the characteristics of clusters (e.g. number of devices, computing resources, communication resources), and realize seamless switching of communication modes while detecting dramatic changes in the clusters to better adapt to heterogeneous and dynamic clusters, such as multi-tenant clusters and edge devices in Edge AI.

References

- [1] Jia, Xianyan, et al. "Highly scalable deep learning training system with mixed-precision: Training imagenet 270 in four minutes." arXiv preprint arXiv:1807.11205, 2018.
- [2] Chen, Jianmin, et al. "Revisiting distributed synchronous SGD." arXiv preprint arXiv:1604.00981 (2016). 272
- [3] Konecny, Jakub, et al. "Federated learning: Strategies for improving communication efficiency." arXiv 273 preprint arXiv:1610.05492 (2016). 274
- [4] Keskar, Nitish Shirish, et al. "On large-batch training for deep learning: Generalization gap and sharp 275 minima." arXiv preprint arXiv:1609.04836 (2016). 276
- [5] Dean, Jeffrey, et al. "Large scale distributed deep networks." Advances in neural information processing 277 systems. 2012. 278
- [6] Lian, Xiangru, et al. "Asynchronous parallel stochastic gradient for nonconvex optimization." Advances in 279 Neural Information Processing Systems. 2015. 280
- [7] Avron, Haim, Alex Druinsky, and Anshul Gupta. "Revisiting asynchronous linear solvers: Provable 281 convergence rate through randomization." Journal of the ACM (JACM) 62.6 (2015): 51.
- [8] Agarwal, Alekh, and John C. Duchi. "Distributed delayed stochastic optimization." Advances in Neural 283 Information Processing Systems. 2011. 284
- [9] McMahan, Brendan, and Matthew Streeter. "Delay-tolerant algorithms for asynchronous distributed online 285 learning." Advances in Neural Information Processing Systems. 2014. 286
- [10] Sra, Suvrit, et al. "Adadelay: Delay adaptive distributed stochastic convex optimization." arXiv preprint 287 arXiv:1508.05003 (2015). 288
- [11] Zheng, Shuxin, et al. "Asynchronous stochastic gradient descent with delay compensation." Proceedings of 289 the 34th International Conference on Machine Learning-Volume 70. JMLR. org, 2017. 290
- [12] Ho, Qirong, et al. "More effective distributed ml via a stale synchronous parallel parameter server." 291 292 Advances in neural information processing systems. 2013.
- [13] Gibiansky, Andrew. "Bringing HPC techniques to deep learning". http://research. baidu.com/bringing-hpc-293

techniques-deep-learning/, 2017.2.21.

294

296

- [14] Rabenseifner, Rolf. "Optimization of collective reduction operations." International Conference on Compu-295 tational Science, Krakow, Poland, 2004.6.6-6.9.
- [15] Gerbessiotis, Alexandros V., and Leslie G. Valiant. "Direct bulk-synchronous parallel algorithms." Journal 297 of parallel and distributed computing 22.2 (1994): 251-267. 298
- [16] Dekel, Ofer, et al. "Optimal distributed online prediction using mini-batches." Journal of Machine Learning 299 Research 13.Jan (2012): 165-202. 300
- [17] Chen, Tianqi, et al. "Mxnet: A flexible and efficient machine learning library for heterogeneous distributed 301 systems." arXiv preprint arXiv:1512.01274 (2015). 302
- [18] Seide, Frank, et al. "1-bit stochastic gradient descent and its application to data-parallel distributed training 303 of speech dnns." Fifteenth Annual Conference of the International Speech Communication Association. 2014. 304
- [19] Lin, Yujun, et al. "Deep gradient compression: Reducing the communication bandwidth for distributed 305 training." arXiv preprint arXiv:1712.01887 (2017). 306
- [20] Xiao, Han, Kashif Rasul, and Roland Vollgraf. "Fashion-mnist: a novel image dataset for benchmarking 307 machine learning algorithms." arXiv preprint arXiv:1708.07747 (2017). 308
- [21] He, Kaiming, et al. "Deep residual learning for image recognition." Proceedings of the IEEE conference on 309 computer vision and pattern recognition. 2016. 310
- [22] Krizhevsky, Alex, Ilya Sutskever, and Geoffrey E. Hinton. "Imagenet classification with deep convolutional 311 neural networks." Advances in neural information processing systems. 2012. 312
- [23] Szegedy, Christian, et al. "Rethinking the inception architecture for computer vision." Proceedings of the 313 IEEE conference on computer vision and pattern recognition. 2016.
- [24] Howard, Andrew G., et al. "Mobilenets: Efficient convolutional neural networks for mobile vision 315 applications." arXiv preprint arXiv:1704.04861 (2017). 316
- [25] Xiao, Lin. "Dual averaging methods for regularized stochastic learning and online optimization." Journal of 317 Machine Learning Research 11.Oct (2010): 2543-2596. 318