

# Servicios



Descripción de los métodos disponibles del api rest

## GET Obtener los personajes

Se obtienen todos los personajes desde la base de datos relacional

### Example

#### Request

```
New Request X
```

```
cURL
```

```
curl --location --request GET 'http://localhost:3000/character' \
--data-raw '{
  "id":20,
  "nombre":"Personaje 19",
  "estatus":"Vivo",
  "especie":"Humano",
  "genero":"Femenino",
  "imagen":"img1.jpg",
  "createdAt":"2022-09-04T20:58:37.000Z",
  "updatedAt":"2022-09-04T20:58:37.000Z"
}'
```

#### Response

#### Body

```
New Request X
```

```
json
```

```
[
  {
    "id": 1,
    "nombre": "Personaje 0",
    "estatus": "Vivo",
    "especie": "Humano",
    "genero": "Femenino",
    "imagen": "img1.jpg",
    "createdAt": "2022-09-04T20:58:36.000Z",
    "updatedAt": "2022-09-04T20:58:36.000Z"
  },
  {
    "id": 2,
    "nombre": "Personaje 1",
    "estatus": "Vivo",
    "especie": "Humano",
    "genero": "Femenino",
    "imagen": "img1.jpg",
    "createdAt": "2022-09-04T20:58:36.000Z",
    "updatedAt": "2022-09-04T20:58:36.000Z"
  }
]
```

## Headers

X-Powered-By	Express
Access-Control-Allow-Origin	*
Content-Type	application/json; charset=utf-8
Content-Length	5622
ETag	W/"15f6-8WCJE1pjhFZGX9Ta5ygKTFQJxfl"
Date	Mon, 05 Sep 2022 08:19:57 GMT
Connection	keep-alive
Keep-Alive	timeout=5

## GET Informacion de los episodios

Se obtienen la informacion de los episodios desde la base de datos no relacional en firebase

## Example

### Request

New Request ×

cURL


```
curl --location --request GET 'https://episodios-9efd0-default-rtdb.firebaseio.com/collection.json' \
--data-raw '{
  "Fecha_estreno": "17-03-2017",
  "Nombre": "Horizontal solution-oriented open system",
  "episodio": "S01E01", "id": 1
}'
```

## Response

### Headers

Server	nginx
Date	Mon, 05 Sep 2022 08:22:56 GMT
Content-Type	application/json; charset=utf-8
Content-Length	105779
Connection	keep-alive
Access-Control-Allow-Origin	*
Cache-Control	no-cache
Strict-Transport-Security	max-age=31556926; includeSubDomains; preload

## Body

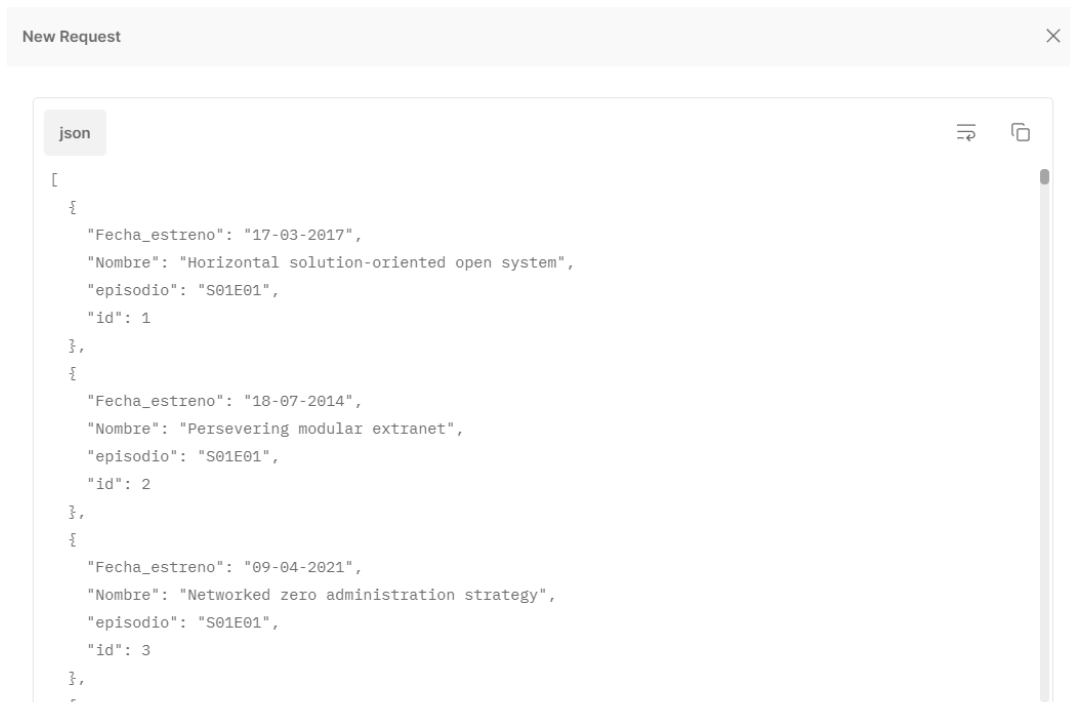

## GET Obtener personajes por ID

Se obtienen los personajes por su ID para mostrar sus datos uno por uno

## Example

### Request



Response

Body Headers

json

```
{
  "id": 5,
  "nombre": "Personaje 4",
  "estatus": "Vivo",
  "especie": "Humano",
  "genero": "Femenino",
  "imagen": "img1.jpg",
  "createdAt": "2022-09-04T20:58:36.000Z",
  "updatedAt": "2022-09-04T20:58:36.000Z"
}
```

View more

Body Headers

X-Powered-By	Express
Access-Control-Allow-Origin	*
Content-Type	application/json; charset=utf-8
Content-Length	185
ETag	W/"b9-O6Laybpg4SYUrdAkh1JIFvxUjLM"
Date	Mon, 05 Sep 2022 08:33:54 GMT
Connection	keep-alive
Keep-Alive	timeout=5