

ICE ICE BABY

Übersicht +

Behälter

id = darreichung

Radio

Wafel

0,-

© Becher

Mango

1,-

Datensatz in daten.js

Vanille



(fieldset)

input type="radio"/>

Schokostreusel

0,-

Schoko



fieldset id="milk"

input type="radio"/>

Stepper

1,-

Orange



fieldset id="frucht"

input type="radio"/>

Stepper

1,-

Apfel



fieldset id="frucht"

input type="radio"/>

Stepper

1,-

Streusel



checkbox

checkbox

checkbox

Raspeln



fieldset id="toppings"

checkbox

checkbox

Name



input fields

checkbox

checkbox

Prüfen

Button

Feldsets + Buttons mit in
im HTML, aber in Code
wird HTML mit values
berechnet nicht mehr
mit value nicht mehr

 Mitarbeiter

Datensätze verändern
manipulieren.


 Kundin

Eis zusammenstellen

Eis bestellen

09

change

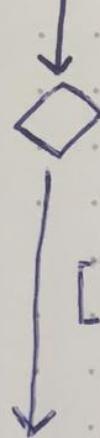

[Wert angeklickt]

[kein Wert]

Wert an
Funktion über-
geben

Übergabe: kein Wert
wird übergeben


Zu
Bestellübersicht
hinzufügen

reloaded Eisdealer - Konzept (3)

namespace {

Variablen

Event Listener:

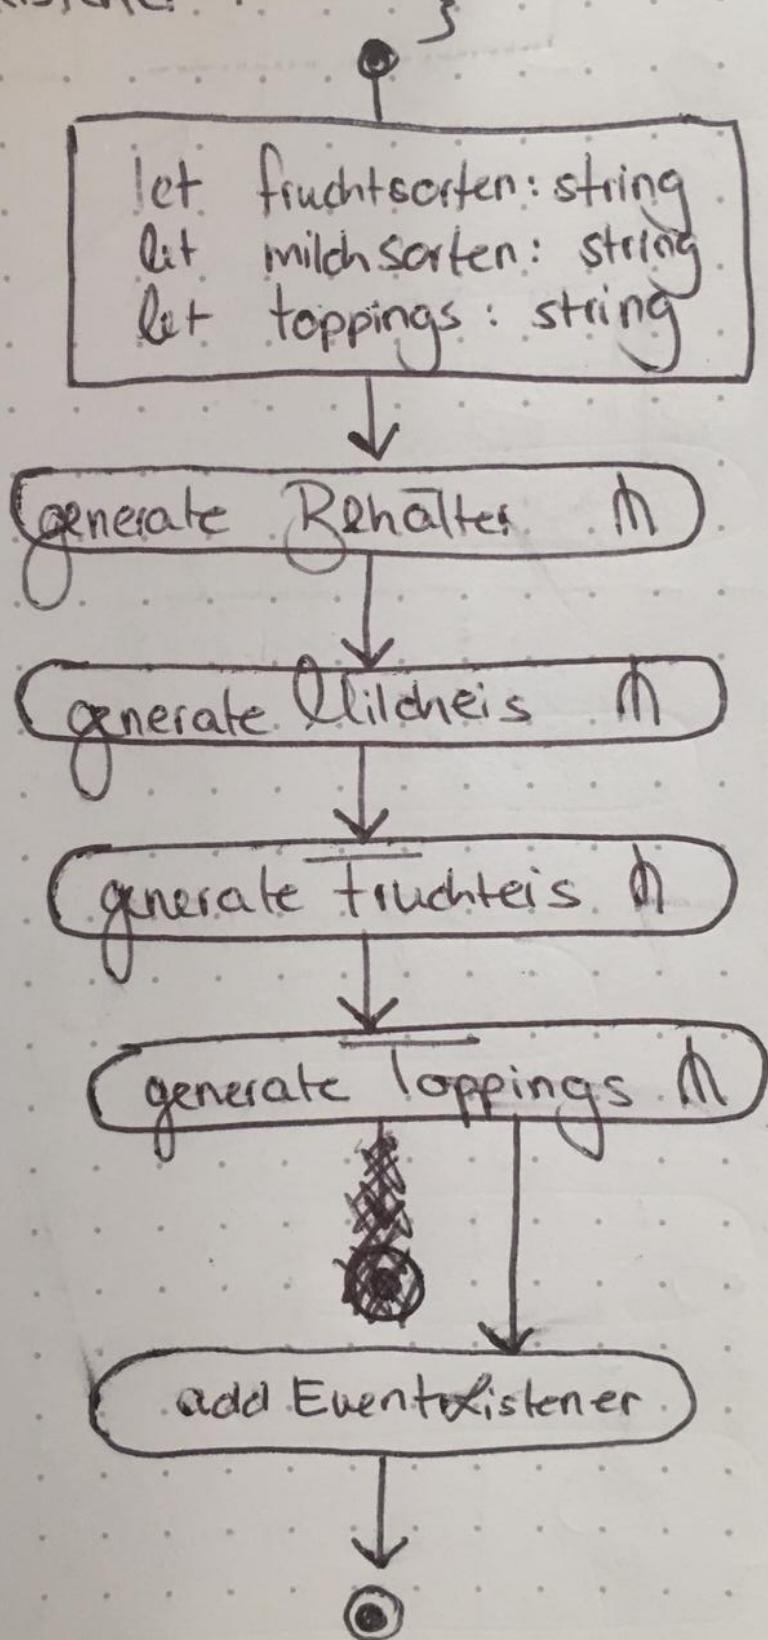

generate Mildeis

(ausgehend von mildeis Array)

