Vadim Kolotenko
Haaga-Helia ammattikorkeakoulu
Linux-palvelimet - ICI003AS2A-3021

Raportti 6
9.10.2026

Intro

Unfortunately I was not invited to write in linuxkurssi/git-testing, so the tip went to my own fork and from there into a pull request.

Git

I installed the git, version 2.47.3. I set the name to Vadim Kolotenko and the email to 84918898+LoLoFoSt@users.noreply.github.com, which is the noreply address from my GitHub account.

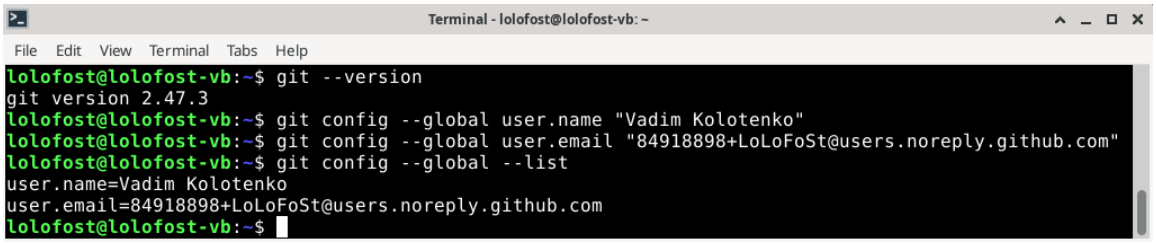


Image 1. Git name and email on lolofost-vb.

I created a new key called github_key. The SSH config uses github_key for github.com and sets IdentitiesOnly, so SSH does not offer the other key.

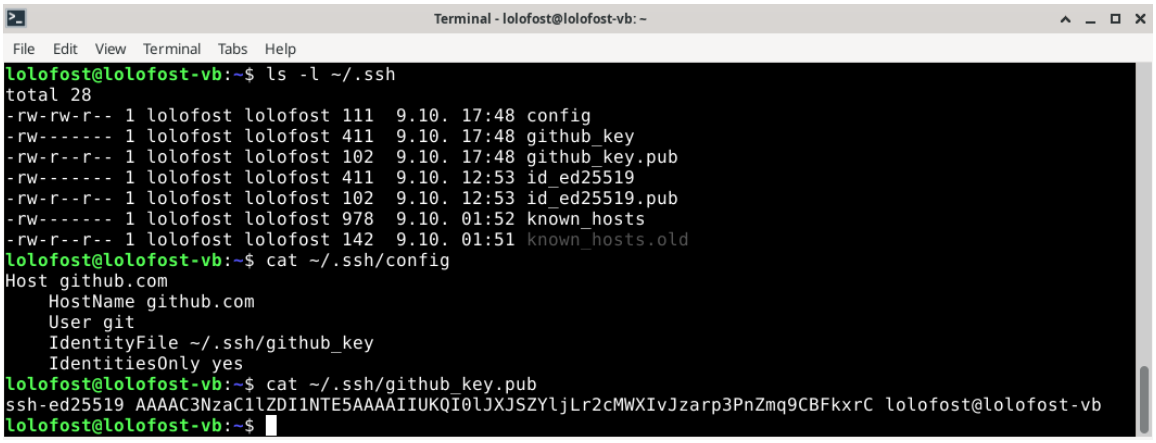


Image 2. The GitHub key and the SSH config.

The first connection asked whether I trusted GitHub. I answered yes. GitHub replied Hi LoLoFoSt! and said that it does not provide shell access.

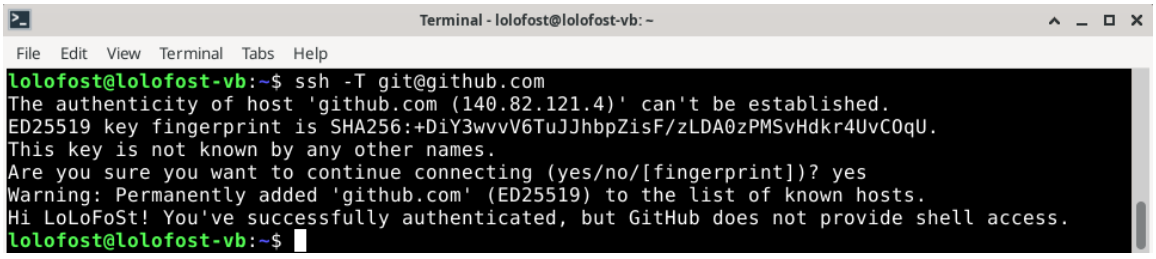


Image 3. GitHub accepted the key.

The repository

I forked linuxkurssi/git-testing to LoLoFoSt/git-testing and cloned that fork. The course repository is the upstream remote. The branch linux-tip was created from upstream/main. The directory already held tip files from other students.

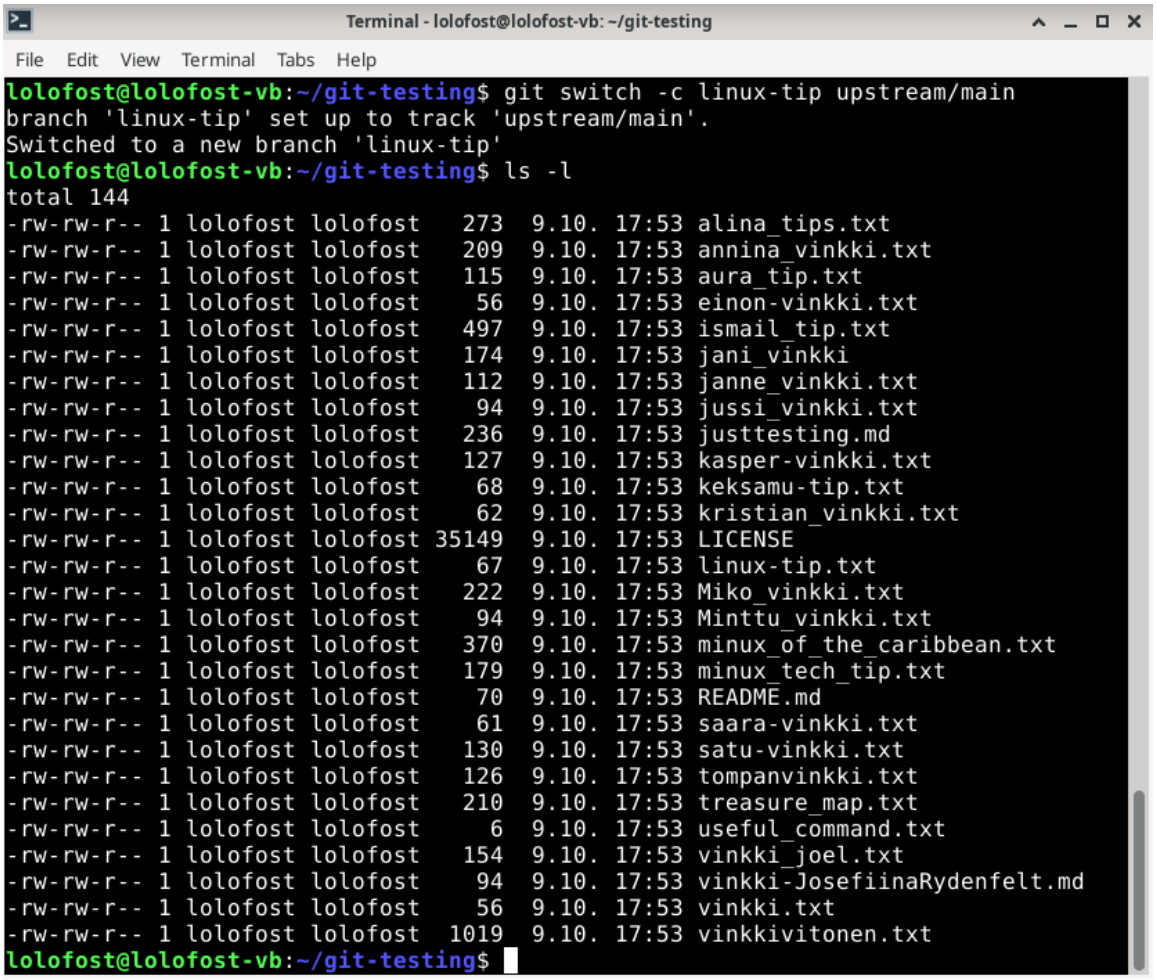


Image 4. Branch linux-tip and the files already in the repository.

I added vadim-tip.txt. The line in it is: df -h shows free disk space on each filesystem. Before the push, the branch was one commit ahead of upstream/main. The push went to origin, which is the fork, and linux-tip now tracks origin/linux-tip.

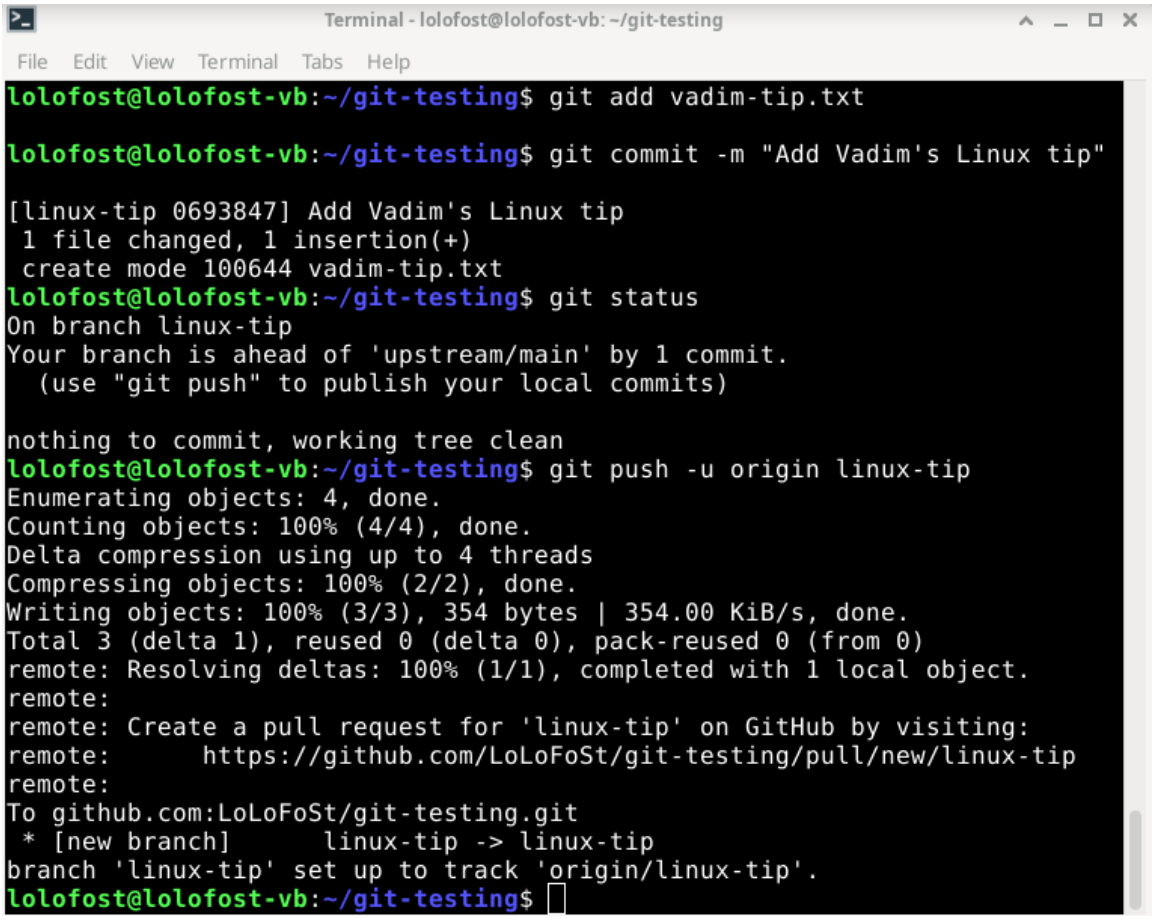


Image 5. The commit and the push to the fork.

Pull request 1 is open on linuxkurssi/git-testing. It asks to merge that one commit from LoLoFoSt:linux-tip into linuxkurssi:main.

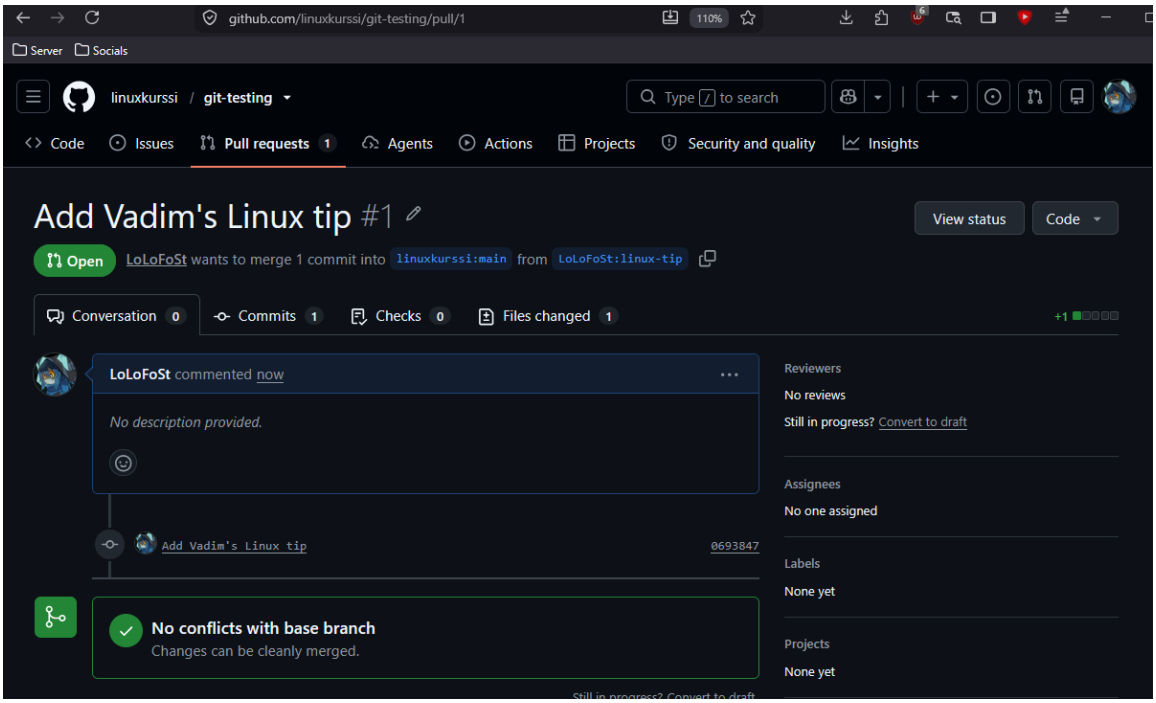


Image 6. Pull request 1.

Docker

I installed Docker on the same virtual machine and ran the hello-world image. It was not on the machine yet, so Docker pulled it. The container printed Hello from Docker! and said the installation appears to be working.

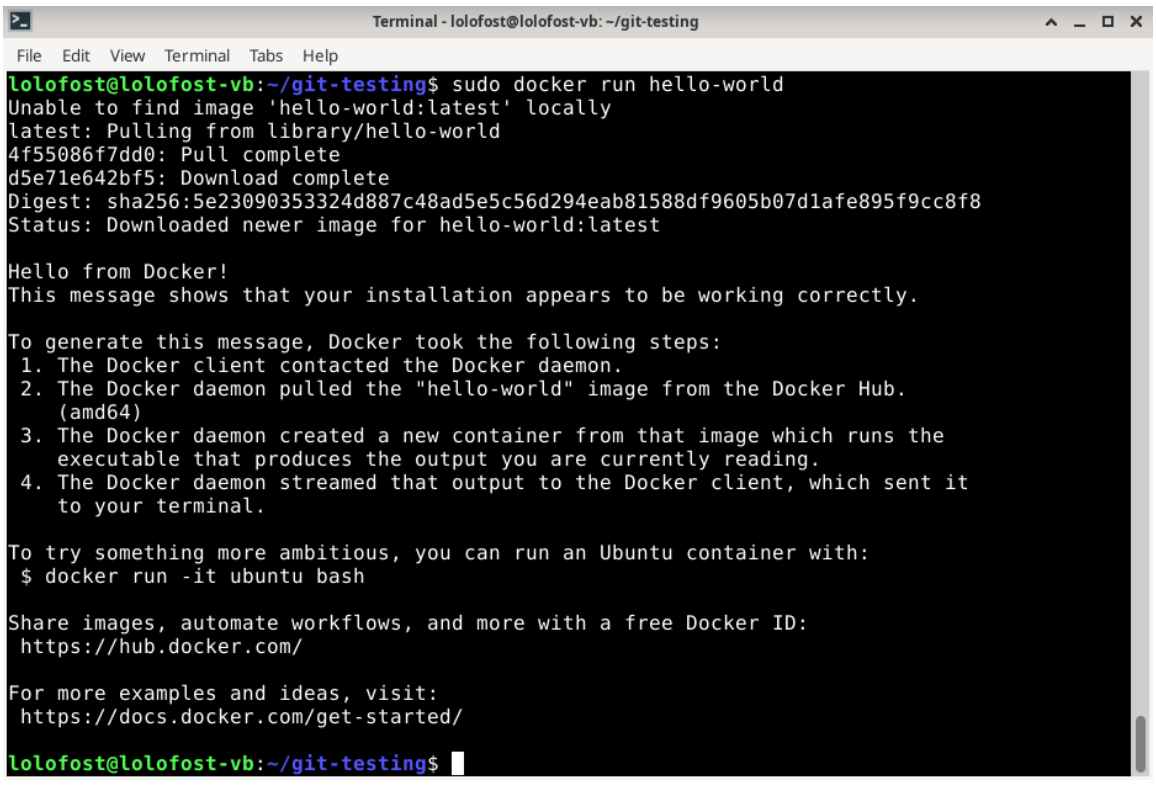


Image 7. The hello-world container.

I started nginx:alpine under the name course-nginx and published port 8080. curl -I http://127.0.0.1:8080 returned HTTP 200, and the server header was nginx/1.31.6. docker ps showed the container up, with 0.0.0.0:8080 forwarded to port 80. I stopped the container after the check.

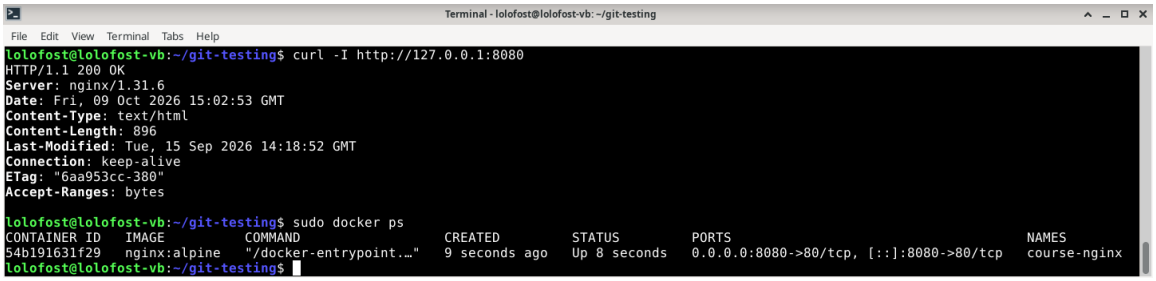


Image 8. The nginx container on port 8080.

One more tool

I installed ripgrep from the Debian repositories. rg --version printed ripgrep 14.1.1.

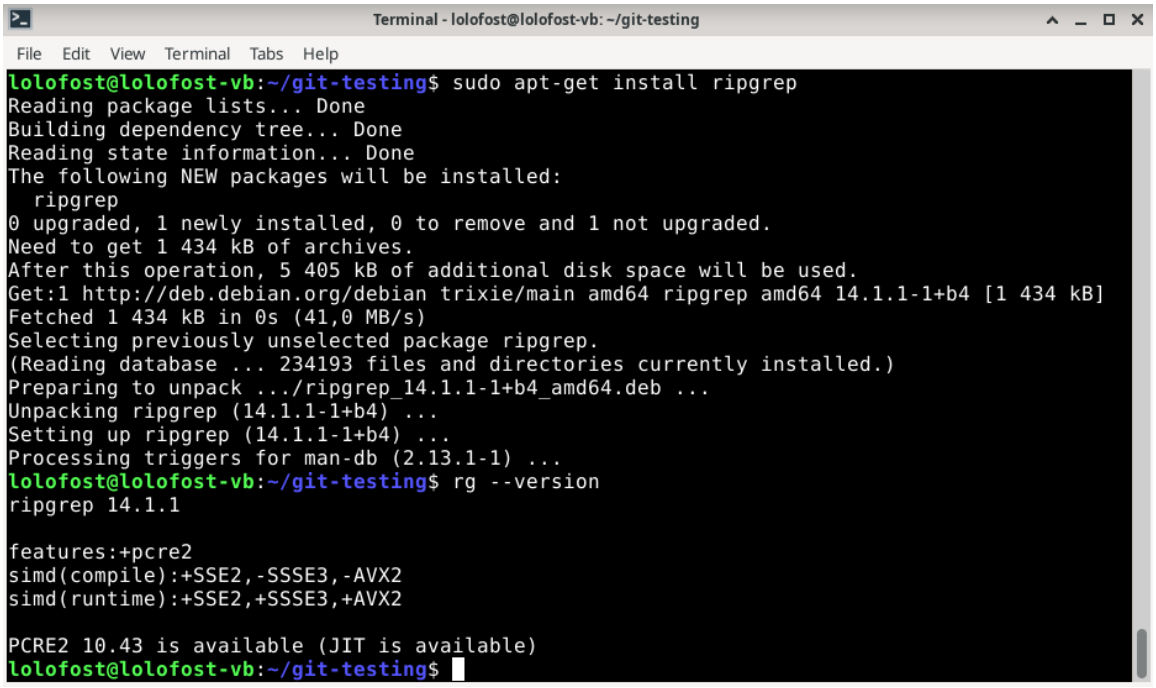


Image 9. ripgrep 14.1.1.

The workstation

This workstation could act as a controller for my home server, where all of my services are. I have my own messenger server there, a music collection that the other devices can play, and some transfer applications that leave the house through a VPN (torrents, p2p). From the workstation I want SSH, Git, and Docker, and a way to search files without opening each one. df -h is the command that shows the free space on each

filesystem so I could potentially run it before downloading new music. ripgrep helps tp see all the configs easier rather than having to read them one by one.

Notes

A direct push to the course repository was not possible, so I had to create a PR.