Vadim Kolotenko
Haaga-Helia ammattikorkeakoulu
Linux-palvelimet - ICI003AS2A-3021

Raportti 7
9.10.2026

Backup

I copied .bashrc to .bashrc.bak before changing anything. Both files were 3526 bytes, and the copy kept the original timestamp. HISTSIZE was 1000 and HISTFILESIZE was 2000. The shell remembered 196 commands, and ~/.bash_history held 191 lines.

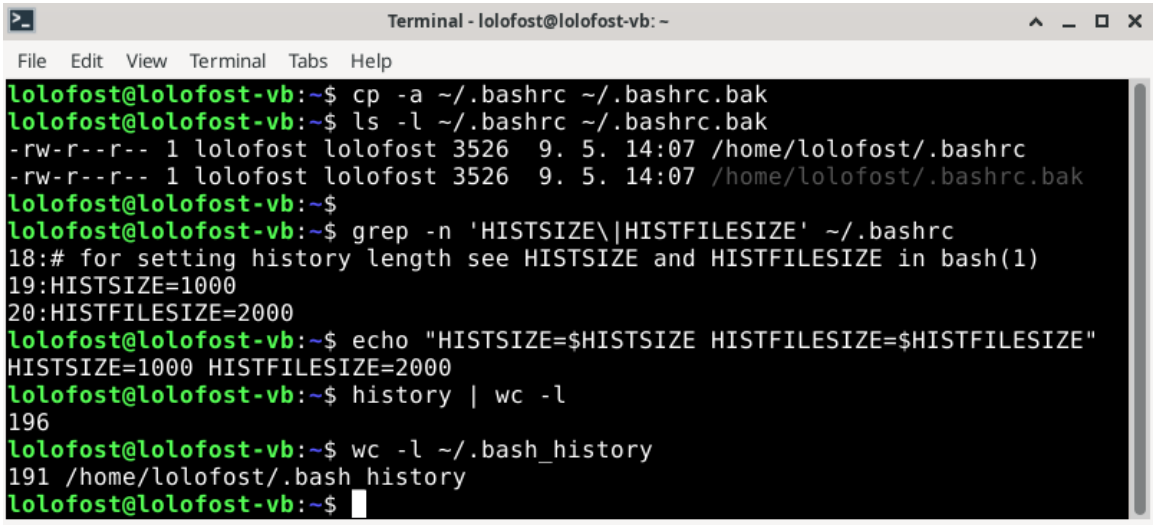


Image 1. The backup and the old history settings.

The startup file

I changed the existing history lines to HISTSIZE=3000 and HISTFILESIZE=6000. At the end of the file I added a banner and two aliases. A new terminal printed Hello, Linuxuser before the prompt. .bashrc runs when a terminal opens, so I did not reload the file in the old window.

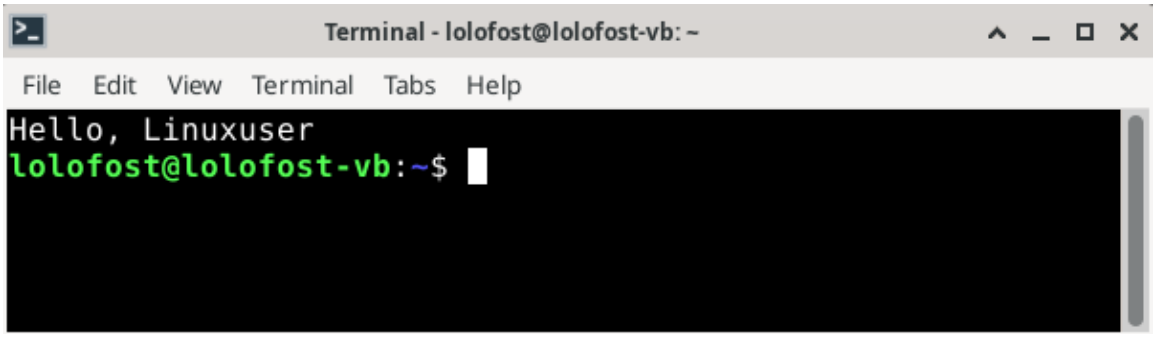


Image 2. The banner in a new terminal.

ll stands for ls -lah. That is the listing I use when I want sizes and hidden files. srv stands for ssh pitzuna@192.168.0.100, which is the home server. type showed both aliases, and ll listed the home directory. The edited .bashrc was newer than .bashrc.bak.

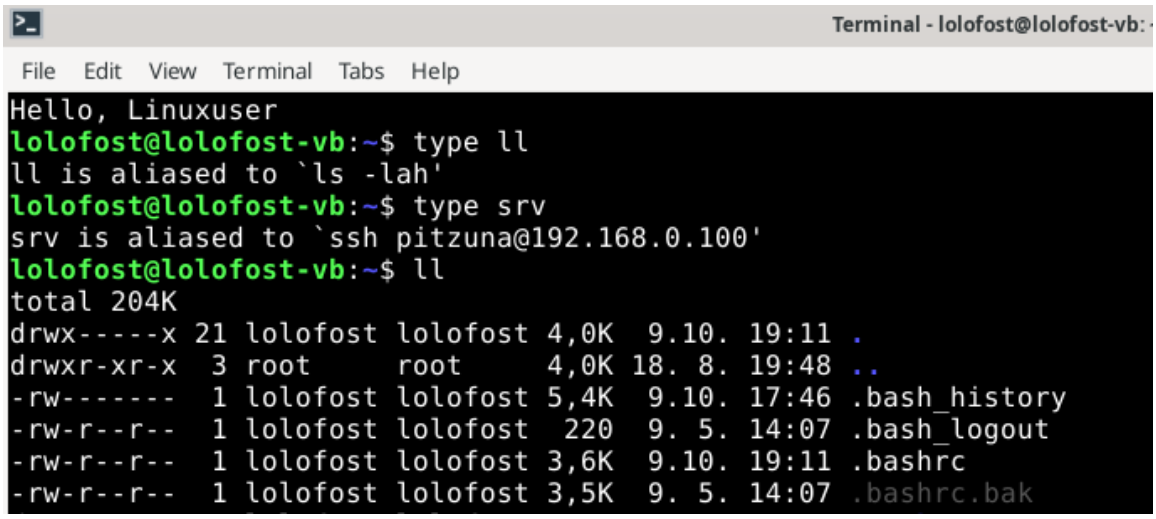


Image 3. The two aliases.

In that new shell HISTSIZE was 3000 and HISTFILESIZE was 6000. history still had only 198 lines. shell now keeps up to 3000 commands, and ~/.bash_history may keep up to 6000 lines when the shell exits.

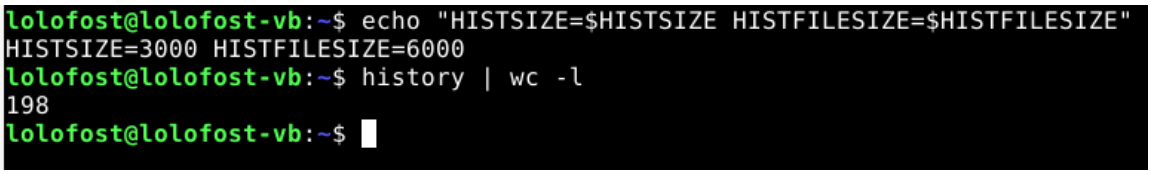


Image 4. The new history limits.

The script

project.sh creates a directory called project, writes the username and the date into project/info.txt, and lists that directory. Before chmod the file was -rw-r--r--. After chmod ugo+x it was -rwxr-xr-x. The script is 97 bytes.

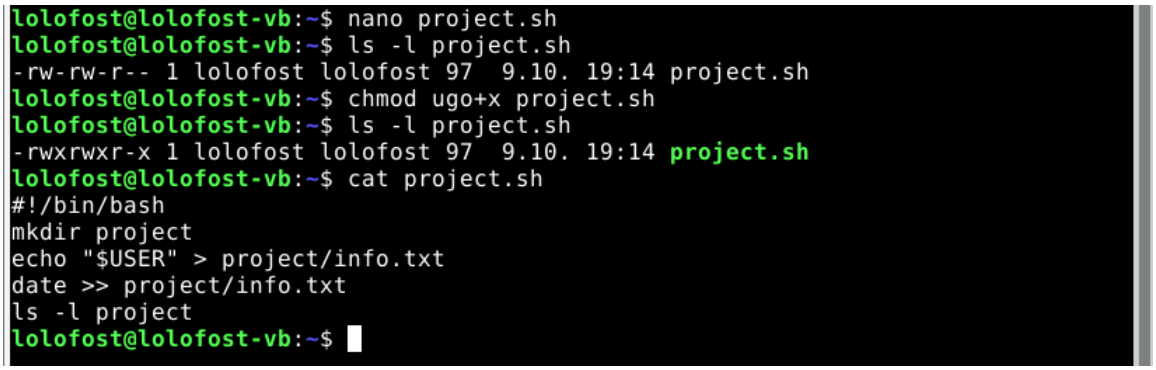


Image 5. The script and the permission change.

I ran it as ./project.sh. The script created info.txt. The file contains lolofost and the line pe 9.10.2026 19.15.11 +0300.

```
lolofost@lolofost-vb:~$ ./project.sh
total 4
-rw-rw-r-- 1 lolofost lolofost 37  9.10. 19:15 info.txt
lolofost@lolofost-vb:~$ cat project/info.txt
lolofost
pe 9.10.2026 19.15.11 +0300
lolofost@lolofost-vb:~$
```

Image 6. The script output and the file.

The end of .bashrc shows the banner and the two aliases. The history settings stay on their original lines, higher up in the file, so they are in the first and fourth pictures.

```
lolofost@lolofost-vb:~$ tail -n 20 ~/.bashrc
# ~/.bash_aliases, instead of adding them here directly.
# See /usr/share/doc/bash-doc/examples in the bash-doc package.

if [ -f ~/.bash_aliases ]; then
    . ~/.bash_aliases
fi

# enable programmable completion features (you don't need to enable
# this, if it's already enabled in /etc/bash.bashrc and /etc/profile
# sources /etc/bash.bashrc).
if ! shopt -oq posix; then
  if [ -f /usr/share/bash-completion/bash_completion ]; then
    . /usr/share/bash-completion/bash_completion
  elif [ -f /etc/bash_completion ]; then
    . /etc/bash_completion
  fi
fi
echo 'Hello, Linuxuser'
alias ll='ls -lah'
alias srv='ssh pitzuna@192.168.0.100'
lolofost@lolofost-vb:~$
```

Image 7. The end of .bashrc.

Notes

The backup meant I could put the original .bashrc back if the banner or the aliases were wrong. The history limits are higher. ll and srv are the two commands I type often on this machine: a full listing, and a connection to the home server.