


Korisnici i prava pristupa

U defaultnom slucaju, manipulacija nad bazama i podacima vrši se koriscenjem jednog korisnickog naloga (root). On biva automatski kreiran prilikom instalacije MySQL-a i on se smatra super administratorom.

U realnim uslovima, kreiracemo konkretne korisnike za razlicite tipove korisnika ili aplikacija koji ce komunicirati sa bazom podataka. Razlicite vrste korisnika ce imati i razlicita prava pristupa objektima na serveru baze podataka.

Kreiranje korisnika

Da bismo kreirali novog korisnika putem phpMyAdmin-a, potrebno je prvo izvršiti konektovanje na server koriscenjem root naloga. Nakon ovoga, dovoljno je odabrati opciju User Account iz glavnog prozora.

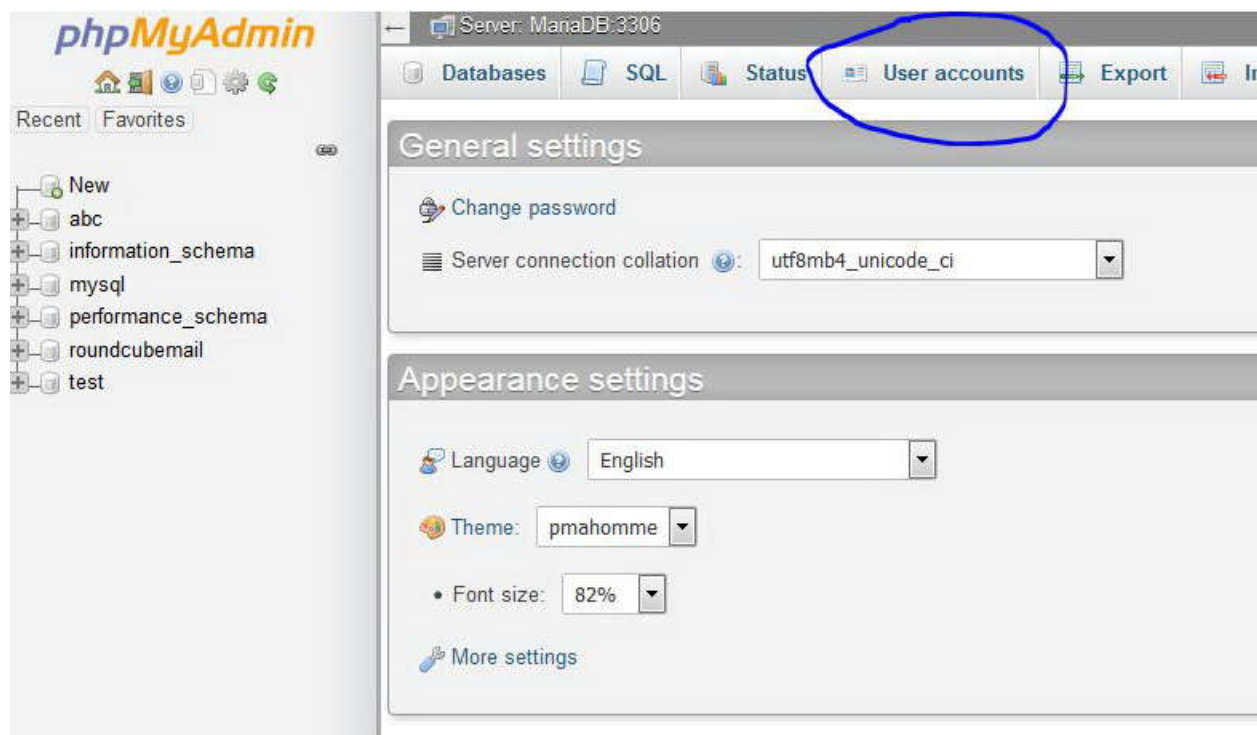

Nakon toga treba odabrati opciju Add user account, a zatim u polja uneti odgovarajuće podatke za ime korisnika, njegovu sifru.

- New
- abc
- information_schema
- mysql
- performance_schema
- roundcubemail
- test

User accounts overview

A user account allowing any user from localhost to connect is present. This will prevent other users from connecting if the host part of the

User name	Host name	Password	Global privileges	Grant	Action
☐ Any	%	No	USAGE	No	Edit privileges Export
☐ Any	localhost	No	USAGE	No	Edit privileges Export
☐ Any	pedja-pc	No	USAGE	No	Edit privileges Export
☐ root	127.0.0.1	No	ALL PRIVILEGES	Yes	Edit privileges Export
☐ root	:::1	No	ALL PRIVILEGES	Yes	Edit privileges Export
☐ root	localhost	No	ALL PRIVILEGES	Yes	Edit privileges Export
☐ root	pedja-pc	No	ALL PRIVILEGES	Yes	Edit privileges Export
☐ roundcubeuser	localhost	Yes	USAGE	No	Edit privileges Export

☐ Check all With selected: Export

New

Add user account

Remove selected user accounts

(Revoke all active privileges from the users and delete them afterwards.)

☐ Drop the databases that have the same names as the users.

Add user account

Login Information

User name:

Use text field:

Host name:

Any host %

Password:

Use text field: Strength:

Re-type:

Authentication Plugin

Native MySQL authentication

Generate password:

Database for user account

☐ Create database with same name and grant all privileges.

☐ Grant all privileges on wildcard name (username_%).

Polje Host name predstavlja adresu sa koje ce korisnik moci da pristupi serveru. Karakter % oznacava da korisnik moze pristupiti serveru sa bilo koje adrese.

Prava pristupa

Pre nego sto kreiramo korisnika pritiskom na taster GO u donjem desnom uglu, moguće je odabrati privilegije koje ce imati taj korisnik za manipulaciju u radu sa bazom podataka i tabelama u okviru nje.

Global privileges ☐ Check all

Note: MySQL privilege names are expressed in English.

☐ Data

☐ SELECT
 ☐ INSERT
 ☐ UPDATE
 ☐ DELETE
 ☐ FILE

☐ Structure

☐ CREATE
 ☐ ALTER
 ☒ INDEX
 ☐ DROP
 ☐ CREATE TEMPORARY TABLES
 ☐ SHOW VIEW
 ☐ CREATE ROUTINE
 ☐ ALTER ROUTINE
 ☐ EXECUTE
 ☐ CREATE VIEW
 ☐ EVENT
 ☐ TRIGGER

☐ Administration

☐ GRANT
 ☐ SUPER
 ☐ PROCESS
 ☐ RELOAD
 ☐ SHUTDOWN
 ☐ SHOW DATABASES
 ☐ LOCK TABLES
 ☐ REFERENCES
 ☐ REPLICATION CLIENT
 ☐ REPLICATION SLAVE
 ☐ CREATE USER

☐ Resource limits

Note: Setting these options to 0 (zero) removes the limit.

MAX QUERIES PER HOUR

MAX UPDATES PER HOUR

MAX CONNECTIONS PER HOUR

MAX USER_CONNECTIONS

☐ SSL

☒ REQUIRE NONE
 ☐ REQUIRE SSL
 ☐ REQUIRE X509
 ☐ SPECIFIED

REQUIRE CIPHER

REQUIRE ISSUER

REQUIRE SUBJECT

Spisak svih privilegija sa nazivom i sa sadrzajem na koji privilegija ima efekat prikazan je u tabeli ispod.

Privilege	Column	Context
CREATE	Create_priv	databases, tables, or indexes
DROP	Drop_priv	databases, tables, or views
GRANT OPTION	Grant_priv	databases, tables, or stored routines
LOCK TABLES	Lock_tables_priv	databases
REFERENCES	References_priv	databases or tables
EVENT	Event_priv	databases
ALTER	Alter_priv	tables
DELETE	Delete_priv	tables
INDEX	Index_priv	tables
INSERT	Insert_priv	tables or columns
SELECT	Select_priv	tables or columns
UPDATE	Update_priv	tables or columns
CREATE TEMPORARY TABLES	Create_tmp_table_priv	tables
TRIGGER	Trigger_priv	tables
CREATE VIEW	Create_view_priv	views
SHOW VIEW	Show_view_priv	views
ALTER ROUTINE	Alter_routine_priv	stored routines
CREATE ROUTINE	Create_routine_priv	stored routines
EXECUTE	Execute_priv	stored routines
FILE	File_priv	file access on server host
CREATE TABLESPACE	Create_tablespace_priv	server administration
CREATE USER	Create_user_priv	server administration
PROCESS	Process_priv	server administration
PROXY	see proxies_priv table	server administration
RELOAD	Reload_priv	server administration
REPLICATION CLIENT	Repl_client_priv	server administration
REPLICATION SLAVE	Repl_slave_priv	server administration
SHOW DATABASES	Show_db_priv	server administration
SHUTDOWN	Shutdown_priv	server administration
SUPER	Super_priv	server administration
ALL [PRIVILEGES]		server administration
USAGE		server administration

Znacenje privilegija ne mora da se uci!

Sve privilegije mogu da se cekiraju na opciji Check all.

U okviru opcije Account Limits, mozemo postaviti granicne vrednosti koje se ticu komunikacije korisnika sa serverom. Koriscenjem ovih opcija mozemo ograniciti broj operacija ili logovanja koje korisnik moze izvorsiti po satu.

Pritiskom na taster GO, pojavljuju se jos jednom sve dodeljene privilegije, koje i u ovom trenutku mozemo editovati.

U glavnom prozoru imamo opciju Database, u okviru koje biramo bazu podataka na koju se odnosi korisnik i privilegije za tog korisnika. Nakon sto izaberemo bazu na koju se podesavanja odnose, idemo na GO.

Global Database Change password Login Information

Edit privileges: User account 'yyyyy'@'%'

Database-specific privileges

Database	Privileges	Grant	Table-specific privileges	Action
None				

Add privileges on the following database(s):

abc
mysql
roundcubemail
test