

# Test Run Report




## Test Run Overview

Started 06 Sep 2022, 16:51:07  
Ended 06 Sep 2022, 16:51:39  
Duration (mm:ss) 00:31.945

## Test Results Summary

Passed 1  
Failed 2  
Skipped 0

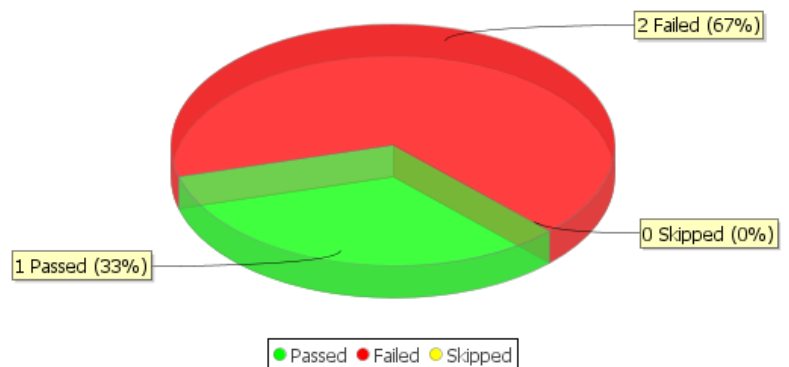

## Test Case Summary

- tests
  - API Tests
    - Create Account and VA Identity Record
      - 01. Create Account with API.testcase
        - failed
        - failed
        - failed
        - failed
        - Failed to create Object. Error Messages: duplicate value found: VCC\_MVI\_External\_Id\_\_c duplicates value on record with id: 0033R000005o6DC
        - Failed to create Object. Error Messages: duplicate value found: VCC\_MVI\_External\_Id\_\_c duplicates value on record with id: 0033R000005qDaG
        - Failed to create Object. Error Messages: duplicate value found: VCC\_MVI\_External\_Id\_\_c duplicates value on record with id: 0033R000005qDaI
        - Failed to create Object. Error Messages: duplicate value found: VCC\_MVI\_External\_Id\_\_c duplicates value on record with id: 0033R000005o3K1
        - Failed to create Object. Error Messages: Required fields are missing: [LastName]
        - Failed to create Object. Error Messages: duplicate value found: VCC\_MVI\_External\_Id\_\_c duplicates value on record with id: 0033R000005qDa4
      - 02. Create VA Identity Record.testcase
        - failed
        - Failed to create Object. Error Messages: duplicate value found: ICN\_\_c duplicates value on record with id: a1c3R0000002OtN
      - 03. Update VA Identity Records to Complete.testcase
        - successful

## 01. Create Account with API.testcase

### Summary

Started 06 Sep 2022, 16:51:07  
Ended 06 Sep 2022, 16:51:21  
Duration (mm:ss) 00:13.899  
Outcome ● failed

### Output

#### ● Salesforce Connect: SysAdmin (Test)

16:51:07(00:00.018)

Connecting to Salesforce as SysAdmin

Connection details. Connection name: SysAdmin, result name: SysAdmin, result scope: Test, urlString: sf:user=Lydse.gedge@vavet.gov.reg;password={password};securityToken={securityToken};environment=OTHER;apiLoginUrl=https://va-vet--reg.my.salesforce.com;userLoginUrl=https://va-vet--reg.my.salesforce.com;webBaseUrl=https://va-vet--reg.my.salesforce.com;lightningMode=true, environment: VAVET\_REG, userName: Lydse.gedge@vavet.gov.reg, password: [supplied] securityToken: [supplied]

Create object id log file.

Opening Partner connection

Opening SOAP connection

Opening Metadata connection

Successfully connected to Salesforce as SysAdmin

Loading data from Parameter Value Source ...

Loading Parameter Value Source row 1:

==Column=> LastName = PrimitiveValueImpl [ value: NWHINZZTESTPATIENT, valuelD=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> FirstName = PrimitiveValueImpl [ value: NWHINONE, valuelD=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> Gender = PrimitiveValueImpl [ value: Male, valuelD=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> Phone = PrimitiveValueImpl [ value: (224) 805-6992, valuelD=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> EmergencyContact = PrimitiveValueImpl [ value: CHEYSHRECONFIRS CHEYSHRECONLAST, valuelD=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> MPIExternalID = PrimitiveValueImpl [ value: 1012638924V546709, valuelD=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> DOB = PrimitiveValueImpl [ value: 1980-12-31, valuelD=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> RecordTypeID = PrimitiveValueImpl [ value: Person Account, valuelD=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

Loading Parameter Value Source row 2:

==Column=> LastName = PrimitiveValueImpl [ value: Bradford, valuelD=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> FirstName = PrimitiveValueImpl [ value: Brad, valuelD=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> Gender = PrimitiveValueImpl [ value: Female, valuelD=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> Phone = PrimitiveValueImpl [ value: (440) 983-7997, valuelD=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> EmergencyContact = null

==Column=> MPIExternalID = PrimitiveValueImpl [ value: 1013452276V180828, valuelD=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> DOB = PrimitiveValueImpl [ value: 1972-04-30, valuelD=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> RecordTypeID = PrimitiveValueImpl [ value: Person Account, valuelD=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

Loading Parameter Value Source row 3:

==Column=> LastName = PrimitiveValueImpl [ value: Meyers, valuelD=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> FirstName = PrimitiveValueImpl [ value: Bill, valuelD=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> Gender = PrimitiveValueImpl [ value: Male, valuelD=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> Phone = PrimitiveValueImpl [ value: (405) 233-4922, valuelD=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> EmergencyContact = null

① ==Column=> MPIExternalID = PrimitiveValueImpl [ value: 1012881470V086192, valuelD=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> DOB = PrimitiveValueImpl [ value: 1960-01-06, valuelD=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> RecordTypeID = PrimitiveValueImpl [ value: Person Account, valuelD=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① Loading Parameter Value Source row 4:

① ==Column=> LastName = PrimitiveValueImpl [ value: Barrera Lucas, valuelD=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> FirstName = PrimitiveValueImpl [ value: Roberta, valuelD=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> Gender = null

① ==Column=> Phone = PrimitiveValueImpl [ value: (703) 568-2542, valuelD=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> EmergencyContact = PrimitiveValueImpl [ value: BOB BROTHER, valuelD=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> MPIExternalID = PrimitiveValueImpl [ value: 1012835386V730604, valuelD=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> DOB = PrimitiveValueImpl [ value: 1971-09-07, valuelD=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> RecordTypeID = PrimitiveValueImpl [ value: Person Account, valuelD=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① Loading Parameter Value Source row 5:

① ==Column=> LastName = null

① ==Column=> FirstName = null

① ==Column=> Gender = null

① ==Column=> Phone = null

① ==Column=> EmergencyContact = null

① ==Column=> MPIExternalID = null

① ==Column=> DOB = null

① ==Column=> RecordTypeID = null

① Loading Parameter Value Source row 6:

① ==Column=> LastName = PrimitiveValueImpl [ value: Davidson, valuelD=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> FirstName = PrimitiveValueImpl [ value: David, valuelD=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> Gender = null

① ==Column=> Phone = null

① ==Column=> EmergencyContact = null

① ==Column=> MPIExternalID = PrimitiveValueImpl [ value: 1010000000V177203, valuelD=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> DOB = null

① ==Column=> RecordTypeID = PrimitiveValueImpl [ value: Person Account, valuelD=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① Loaded 6 rows from Parameter Value Source.

## ● Read Accounts File

⌚ 16:51:10(00:02.860)

① Loading data from Parameter Value Source ...

① Loading Parameter Value Source row 1:

① ==Column=> LastName = PrimitiveValueImpl [ value: NWHINZZZTESTPATIENT, valuelD=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> FirstName = PrimitiveValueImpl [ value: NWHINONE, valuelD=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> Gender = PrimitiveValueImpl [ value: Male, valuelD=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> Phone = PrimitiveValueImpl [ value: (224) 805-6992, valuelD=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> EmergencyContact = PrimitiveValueImpl [ value: CHEYSHRECONFIRS CHEYSHRECONLAST, valuelD=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> MPIExternalID = PrimitiveValueImpl [ value: 1012638924V546709, valuelD=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> DOB = PrimitiveValueImpl [ value: 1980-12-31, valuelD=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> RecordTypeID = PrimitiveValueImpl [ value: Person Account, valuelD=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① Loading Parameter Value Source row 2:

① ==Column=> LastName = PrimitiveValueImpl [ value: Bradford, valuelD=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> FirstName = PrimitiveValueImpl [ value: Brad, valuelD=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

ⓘ ==Column=> Gender = PrimitiveValueImpl [ value: Female, valuelid=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]  
 ⓘ ==Column=> Phone = PrimitiveValueImpl [ value: (440) 983-7997, valuelid=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]  
 ⓘ ==Column=> EmergencyContact = null  
 ⓘ ==Column=> MPIExternalID = PrimitiveValueImpl [ value: 1013452276V180828, valuelid=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]  
 ⓘ ==Column=> DOB = PrimitiveValueImpl [ value: 1972-04-30, valuelid=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]  
 ⓘ ==Column=> RecordTypeID = PrimitiveValueImpl [ value: Person Account, valuelid=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]  
 ⓘ Loading Parameter Value Source row 3:  
 ⓘ ==Column=> LastName = PrimitiveValueImpl [ value: Meyers, valuelid=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]  
 ⓘ ==Column=> FirstName = PrimitiveValueImpl [ value: Bill, valuelid=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]  
 ⓘ ==Column=> Gender = PrimitiveValueImpl [ value: Male, valuelid=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]  
 ⓘ ==Column=> Phone = PrimitiveValueImpl [ value: (405) 233-4922, valuelid=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]  
 ⓘ ==Column=> EmergencyContact = null  
 ⓘ ==Column=> MPIExternalID = PrimitiveValueImpl [ value: 1012881470V086192, valuelid=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]  
 ⓘ ==Column=> DOB = PrimitiveValueImpl [ value: 1960-01-06, valuelid=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]  
 ⓘ ==Column=> RecordTypeID = PrimitiveValueImpl [ value: Person Account, valuelid=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]  
 ⓘ Loading Parameter Value Source row 4:  
 ⓘ ==Column=> LastName = PrimitiveValueImpl [ value: Barrera Lucas, valuelid=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]  
 ⓘ ==Column=> FirstName = PrimitiveValueImpl [ value: Roberta, valuelid=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]  
 ⓘ ==Column=> Gender = null  
 ⓘ ==Column=> Phone = PrimitiveValueImpl [ value: (703) 568-2542, valuelid=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]  
 ⓘ ==Column=> EmergencyContact = PrimitiveValueImpl [ value: BOB BROTHER, valuelid=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]  
 ⓘ ==Column=> MPIExternalID = PrimitiveValueImpl [ value: 1012835386V730604, valuelid=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]  
 ⓘ ==Column=> DOB = PrimitiveValueImpl [ value: 1971-09-07, valuelid=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]  
 ⓘ ==Column=> RecordTypeID = PrimitiveValueImpl [ value: Person Account, valuelid=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]  
 ⓘ Loading Parameter Value Source row 5:  
 ⓘ ==Column=> LastName = null  
 ⓘ ==Column=> FirstName = null  
 ⓘ ==Column=> Gender = null  
 ⓘ ==Column=> Phone = null  
 ⓘ ==Column=> EmergencyContact = null  
 ⓘ ==Column=> MPIExternalID = null  
 ⓘ ==Column=> DOB = null  
 ⓘ ==Column=> RecordTypeID = null  
 ⓘ Loading Parameter Value Source row 6:  
 ⓘ ==Column=> LastName = PrimitiveValueImpl [ value: Davidson, valuelid=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]  
 ⓘ ==Column=> FirstName = PrimitiveValueImpl [ value: David, valuelid=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]  
 ⓘ ==Column=> Gender = null  
 ⓘ ==Column=> Phone = null  
 ⓘ ==Column=> EmergencyContact = null  
 ⓘ ==Column=> MPIExternalID = PrimitiveValueImpl [ value: 1010000000V177203, valuelid=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]  
 ⓘ ==Column=> DOB = null  
 ⓘ ==Column=> RecordTypeID = PrimitiveValueImpl [ value: Person Account, valuelid=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]  
 ⓘ Loaded 6 rows from Parameter Value Source.

## ● Set Values: LastName

⌚ 16:51:10(00:02.919)

ⓘ Setting value LastName to NWHINZZZTESTPATIENT

⚙ Configuration: ValueScope:Test

ℹ Successfully set LastName to NWHINZZZTESTPATIENT

### ● Set Values: FirstName

⌚ 16:51:10(00:02.944)

ℹ Setting value FirstName to NWHINONE

⚙ Configuration: ValueScope:Test

ℹ Successfully set FirstName to NWHINONE

### ● Set Values: Phone

⌚ 16:51:10(00:02.971)

ℹ Setting value Phone to (224) 805-6992

⚙ Configuration: ValueScope:Test

ℹ Successfully set Phone to (224) 805-6992

### ● Set Values: EmergencyContact

⌚ 16:51:10(00:02.996)

ℹ Setting value EmergencyContact to CHEYSHRECONFIRS CHEYSHRECONLAST

⚙ Configuration: ValueScope:Test

ℹ Successfully set EmergencyContact to CHEYSHRECONFIRS CHEYSHRECONLAST

### ● Set Values: MPI\_External\_ID

⌚ 16:51:10(00:03.020)

ℹ Setting value MPI\_External\_ID to 1012638924V546709

⚙ Configuration: ValueScope:Test

ℹ Successfully set MPI\_External\_ID to 1012638924V546709

### ● Set Values: Gender

⌚ 16:51:10(00:03.047)

ℹ Setting value Gender to Male

⚙ Configuration: ValueScope:Test

ℹ Successfully set Gender to Male

### ● Set Values: DOB

⌚ 16:51:10(00:03.073)

ℹ Setting value DOB to 1981-01-01

⚙ Configuration: ValueScope:Test

ℹ Successfully set DOB to 1981-01-01

### ● Set Values: count

⌚ 16:51:10(00:03.100)

ℹ Setting value count to 2

⚙ Configuration: ValueScope:Test

ℹ Successfully set count to 2

### ● For Each: {AccountFieldFromFile}=>Row

⌚ 16:51:10(00:03.127)

ℹ Start of iteration 1 of 6.

#### ● Iteration 1

⌚ 16:51:10(00:03.210)

#### ● Create Object: Account=>AccountId

⌚ 16:51:10(00:03.213)

ℹ Creating a new Salesforce object. Connection Name: SysAdmin, Name: Account, field count: 8

ℹ Setting fields:

ℹ =Field=> VCC\_Gender\_Identity\_\_c = Male

ℹ =Field=> VCC\_Date\_of\_Birth\_Text\_\_pc = 1981-01-01

ℹ =Field=> VCC\_Emergency\_Contact\_\_pc = CHEYSHRECONFIRS CHEYSHRECONLAST

ℹ =Field=> FirstName = NWHINONE

ℹ =Field=> Phone = (224) 805-6992

ℹ =Field=> RecordTypeId = Person Account

ℹ =Field=> LastName = NWHINZZZTESTPATIENT

ℹ =Field=> VCC\_MVI\_External\_Id\_\_pc = 1012638924V546709

● Failed to create Object. Error Messages: duplicate value found: VCC\_MVI\_External\_Id\_\_c duplicates value on record with id: 0033R000005o6DC

### ● Set Values: Header.AccountId

⌚ 16:51:13(00:05.817)

- ① Setting value Header.AccountId to <null>
  - ⚙ Configuration: ValueScope:Test
  - ① Successfully set Header.AccountId to <null>
- Write: {Header}=>templates/Output/AccountsIDs.xlsx ④ 16:51:14(00:06.671)
  - ① Writing to URL templates/Output/AccountsIDs.xlsx
  - ① Start of Excel Write. WorkbookPath: templates/Output/AccountsIDs.xlsx, excludeCols: [none]
  - ① Workbook location: C:\Users\LydseGedge\Provar\VAHC\VAHC\templates\Output\AccountsIDs.xlsx
  - ① Writing data to excel sheet: Sheet0
  - ① Got NamedValueList: NamedValueListValueImpl [ valueCount: 1, valueId=10000000000002, createdUpdateSeq=29, updatedUpdateSeq=30, values: [[id: 10000000000003,entryName: AccountId,entryId: null]]]
  - ① Match Locator resolved to: 2
  - ① Writing row 2
  - ⚙ Found header. colNum: 0
  - ⚙ Writing cell AccountId:
  - ① Completed writing data to excel sheet: Sheet0
- Set Values: count ④ 16:51:14(00:07.201)
  - ① Setting value count to 3
  - ⚙ Configuration: ValueScope:Test
  - ① Successfully set count to 3
- ① Start of iteration 2 of 6.
- Iteration 2 ④ 16:51:14(00:07.276)
  - Create Object: Account=>AccountId ④ 16:51:14(00:07.279)
    - ① Creating a new Salesforce object. Connection Name: SysAdmin, Name: Account, field count: 8
    - ① Setting fields:
      - ① =Field=> VCC\_Gender\_Identity\_\_c = Female
      - ① =Field=> VCC\_Date\_of\_Birth\_Text\_\_pc = 1972-05-01
      - ① =Field=> VCC\_Emergency\_Contact\_\_pc = <null>
      - ① =Field=> FirstName = Brad
      - ① =Field=> Phone = (440) 983-7997
      - ① =Field=> RecordTypeId = Person Account
      - ① =Field=> LastName = Bradford
      - ① =Field=> VCC\_MVI\_External\_Id\_\_pc = 1013452276V180828
    - Failed to create Object. Error Messages: duplicate value found: VCC\_MVI\_External\_Id\_\_c duplicates value on record with id: 0033R000005qDaG
  - Set Values: Header.AccountId ④ 16:51:16(00:08.459)
    - ① Setting value Header.AccountId to <null>
    - ⚙ Configuration: ValueScope:Test
    - ① Successfully set Header.AccountId to <null>
  - Write: {Header}=>templates/Output/AccountsIDs.xlsx ④ 16:51:16(00:08.491)
    - ① Writing to URL templates/Output/AccountsIDs.xlsx
    - ① Start of Excel Write. WorkbookPath: templates/Output/AccountsIDs.xlsx, excludeCols: [none]
    - ① Workbook location: C:\Users\LydseGedge\Provar\VAHC\VAHC\templates\Output\AccountsIDs.xlsx
    - ① Writing data to excel sheet: Sheet0
    - ① Got NamedValueList: NamedValueListValueImpl [ valueCount: 1, valueId=10000000000002, createdUpdateSeq=29, updatedUpdateSeq=40, values: [[id: 10000000000004,entryName: AccountId,entryId: null]]]
    - ① Match Locator resolved to: 3
    - ① Writing row 3

- ⚙ Found header. colNum: 0
      - ⚙ Writing cell AccountId:
      - ℹ Completed writing data to excel sheet: Sheet0
    - Set Values: count ⌚ 16:51:16(00:08.584)
      - ℹ Setting value count to 4
      - ⚙ Configuration: ValueScope:Test
      - ℹ Successfully set count to 4
  - ℹ Start of iteration 3 of 6.
- Iteration 3 ⌚ 16:51:16(00:08.645)
  - Create Object: Account=>AccountId ⌚ 16:51:16(00:08.646)
    - ℹ Creating a new Salesforce object. Connection Name: SysAdmin, Name: Account, field count: 8
    - ℹ Setting fields:
      - ℹ =Field=> VCC\_Gender\_Identity\_\_c = Male
      - ℹ =Field=> VCC\_Date\_of\_Birth\_Text\_\_pc = 1960-01-07
      - ℹ =Field=> VCC\_Emergency\_Contact\_\_pc = <null>
      - ℹ =Field=> FirstName = Bill
      - ℹ =Field=> Phone = (405) 233-4922
      - ℹ =Field=> RecordTypeId = Person Account
      - ℹ =Field=> LastName = Meyers
      - ℹ =Field=> VCC\_MVI\_External\_Id\_\_pc = 1012881470V086192
    - Failed to create Object. Error Messages: duplicate value found: VCC\_MVI\_External\_Id\_\_c duplicates value on record with id: 0033R000005qDal
  - Set Values: Header.AccountId ⌚ 16:51:17(00:09.917)
    - ℹ Setting value Header.AccountId to <null>
    - ⚙ Configuration: ValueScope:Test
    - ℹ Successfully set Header.AccountId to <null>
  - Write: {Header}>=>templates/Output/AccountsIDs.xlsx ⌚ 16:51:17(00:09.976)
    - ℹ Writing to URL templates/Output/AccountsIDs.xlsx
    - ℹ Start of Excel Write. WorkbookPath: templates/Output/AccountsIDs.xlsx, excludeCols: [none]
    - ℹ Workbook location: C:\Users\LydseGedge\Provar\VAHC\VAHC\templates\Output\AccountsIDs.xlsx
    - ℹ Writing data to excel sheet: Sheet0
    - ℹ Got NamedValueList: NamedValueListValueImpl [ valueCount: 1, valueId=100000000000002, createdUpdateSeq=29, updatedUpdateSeq=50, values: [[id: 100000000000005,entryName: AccountId,entryId: null]]]
    - ℹ Match Locator resolved to: 4
    - ℹ Writing row 4
    - ⚙ Found header. colNum: 0
    - ⚙ Writing cell AccountId:
    - ℹ Completed writing data to excel sheet: Sheet0
  - Set Values: count ⌚ 16:51:17(00:10.062)
    - ℹ Setting value count to 5
    - ⚙ Configuration: ValueScope:Test
    - ℹ Successfully set count to 5
- ℹ Start of iteration 4 of 6.
- Iteration 4 ⌚ 16:51:17(00:10.134)
  - Create Object: Account=>AccountId ⌚ 16:51:17(00:10.134)
    - ℹ Creating a new Salesforce object. Connection Name: SysAdmin, Name: Account, field count: 8
    - ℹ Setting fields:

① =Field=> VCC\_Gender\_Identity\_\_c = <null>

① =Field=> VCC\_Date\_of\_Birth\_Text\_\_pc = 1971-09-08

① =Field=> VCC\_Emergency\_Contact\_\_pc = BOB BROTHER

① =Field=> FirstName = Roberta

① =Field=> Phone = (703) 568-2542

① =Field=> RecordTypeId = Person Account

① =Field=> LastName = Barrera Lucas

① =Field=> VCC\_MVI\_External\_Id\_\_pc = 1012835386V730604

● Failed to create Object. Error Messages: duplicate value found: VCC\_MVI\_External\_Id\_\_c duplicates value on record with id: 0033R000005o3K1

● Set Values: Header.AccountId

⌚ 16:51:18(00:11.394)

① Setting value Header.AccountId to <null>

⚙ Configuration: ValueScope:Test

① Successfully set Header.AccountId to <null>

● Write: {Header}>templates/Output/AccountsIDs.xlsx

⌚ 16:51:19(00:11.421)

① Writing to URL templates/Output/AccountsIDs.xlsx

① Start of Excel Write. WorkbookPath: templates/Output/AccountsIDs.xlsx, excludeCols: [none]

① Workbook location: C:\Users\LydseGedge\Provar\VAHC\VAHC\templates\Output\AccountsIDs.xlsx

① Writing data to excel sheet: Sheet0

① Got NamedValueList: NamedValueListValueImpl [ valueCount: 1, valueId=10000000000002, createdUpdateSeq=29, updatedUpdateSeq=60, values: [[id: 10000000000006,entryName: AccountId,entryId: null]]]

① Match Locator resolved to: 5

① Writing row 5

⚙ Found header. colNum: 0

⚙ Writing cell AccountId:

① Completed writing data to excel sheet: Sheet0

● Set Values: count

⌚ 16:51:19(00:11.510)

① Setting value count to 6

⚙ Configuration: ValueScope:Test

① Successfully set count to 6

① Start of iteration 5 of 6.

● Iteration 5

⌚ 16:51:19(00:11.587)

● Create Object: Account=>AccountId

⌚ 16:51:19(00:11.589)

① Creating a new Salesforce object. Connection Name: SysAdmin, Name: Account, field count: 8

① Setting fields:

① =Field=> VCC\_Gender\_Identity\_\_c = <null>

① =Field=> VCC\_Date\_of\_Birth\_Text\_\_pc = <null>

① =Field=> VCC\_Emergency\_Contact\_\_pc = <null>

① =Field=> FirstName = <null>

① =Field=> Phone = <null>

① =Field=> RecordTypeId = Person Account

① =Field=> LastName = <null>

① =Field=> VCC\_MVI\_External\_Id\_\_pc = <null>

● Failed to create Object. Error Messages: Required fields are missing: [LastName]

● Set Values: Header.AccountId

⌚ 16:51:20(00:12.646)

① Setting value Header.AccountId to <null>

⚙ Configuration: ValueScope:Test



- ① Successfully set Header.AccountId to <null>
- Write: {Header}=>templates/Output/AccountsIDs.xlsx ② 16:51:20(00:12.695)
  - ① Writing to URL templates/Output/AccountsIDs.xlsx
  - ① Start of Excel Write. WorkbookPath: templates/Output/AccountsIDs.xlsx, excludeCols: [none]
  - ① Workbook location: C:\Users\LydseGedge\Provar\VAHC\VAHC\templates\Output\AccountsIDs.xlsx
  - ① Writing data to excel sheet: Sheet0
  - ① Got NamedValueList: NamedValueListValueImpl [ valueCount: 1, valueId=10000000000002, createdUpdateSeq=29, updatedUpdateSeq=70, values: [[id: 10000000000007,entryName: AccountId,entryId: null]]]
  - ① Match Locator resolved to: 6
  - ① Writing row 6
  - ✦ Found header. colNum: 0
  - ✦ Writing cell AccountId:
  - ① Completed writing data to excel sheet: Sheet0
- Set Values: count ② 16:51:20(00:12.764)
  - ① Setting value count to 7
  - ✦ Configuration: ValueScope:Test
  - ① Successfully set count to 7
- ① Start of iteration 6 of 6.
- Iteration 6 ② 16:51:20(00:12.826)
  - Create Object: Account=>AccountId ② 16:51:20(00:12.827)
    - ① Creating a new Salesforce object. Connection Name: SysAdmin, Name: Account, field count: 8
    - ① Setting fields:
    - ① =Field=> VCC\_Gender\_Identity\_\_c = <null>
    - ① =Field=> VCC\_Date\_of\_Birth\_Text\_\_pc = <null>
    - ① =Field=> VCC\_Emergency\_Contact\_\_pc = <null>
    - ① =Field=> FirstName = David
    - ① =Field=> Phone = <null>
    - ① =Field=> RecordTypeId = Person Account
    - ① =Field=> LastName = Davidson
    - ① =Field=> VCC\_MVI\_External\_Id\_\_pc = 101000000V177203
    - Failed to create Object. Error Messages: duplicate value found: VCC\_MVI\_External\_Id\_\_c duplicates value on record with id: 0033R000005qDa4
- Set Values: Header.AccountId ② 16:51:21(00:13.732)
  - ① Setting value Header.AccountId to <null>
  - ✦ Configuration: ValueScope:Test
  - ① Successfully set Header.AccountId to <null>
- Write: {Header}=>templates/Output/AccountsIDs.xlsx ② 16:51:21(00:13.803)
  - ① Writing to URL templates/Output/AccountsIDs.xlsx
  - ① Start of Excel Write. WorkbookPath: templates/Output/AccountsIDs.xlsx, excludeCols: [none]
  - ① Workbook location: C:\Users\LydseGedge\Provar\VAHC\VAHC\templates\Output\AccountsIDs.xlsx
  - ① Writing data to excel sheet: Sheet0
  - ① Got NamedValueList: NamedValueListValueImpl [ valueCount: 1, valueId=10000000000002, createdUpdateSeq=29, updatedUpdateSeq=80, values: [[id: 10000000000008,entryName: AccountId,entryId: null]]]
  - ① Match Locator resolved to: 7
  - ① Writing row 7
  - ✦ Found header. colNum: 0
  - ✦ Writing cell AccountId:

① Completed writing data to excel sheet: Sheet0

● Set Values: count

⌚ 16:51:21(00:13.867)

① Setting value count to 8

⚙ Configuration: ValueScope:Test

① Successfully set count to 8

① Reached the end of the List.

① Handling managed resource. Name: SysAdmin


⚙ Closing Salesforce Connection because it is no longer being used. Name: SysAdmin

⚙ Shutting down Soap Connections. logFilePath: SysAdmin-objectids.log

① Salesforce Connection handled successfully. Name: SysAdmin

## 02. Create VA Identity Record.testcase

### Summary

Started 06 Sep 2022, 16:51:21  
Ended 06 Sep 2022, 16:51:30  
Duration (mm:ss) 00:09.351  
Outcome  failed

### Output

#### ● Salesforce Connect: SysAdmin (Test)

⌚ 16:51:21(00:13.951)

📘 Connecting to Salesforce as SysAdmin

⚙️ Connection details. Connection name: SysAdmin, result name: SysAdmin, result scope: Test, urlString: sf:user=Lydse.gedge@vavet.gov.reg;password={password};securityToken={securityToken};environment=OTHER;apiLoginUrl=https://va-vet--reg.my.salesforce.com;userLoginUrl=https://va-vet--reg.my.salesforce.com;webBaseUrl=https://va-vet--reg.my.salesforce.com;lightningMode=true, environment: VAVET\_REG, userName: Lydse.gedge@vavet.gov.reg, password: [supplied] securityToken: [supplied]

⚙️ Create object id log file.

⚙️ Opening Partner connection

⚙️ Opening SOAP connection

⚙️ Opening Metadata connection

📘 Successfully connected to Salesforce as SysAdmin

📘 Loading data from Parameter Value Source ...

📘 Loading Parameter Value Source row 1:

📘 ==Column=> SalesforceContactID = PrimitiveValueImpl [ value: NWHINONE NWHINZZZTESTPATIENT, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

📘 ==Column=> FirstName = PrimitiveValueImpl [ value: NWHINONE, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

📘 ==Column=> LastName = PrimitiveValueImpl [ value: NWHINZZZTESTPATIENT, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

📘 ==Column=> ICN = PrimitiveValueImpl [ value: 1012638924V546709, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

📘 ==Column=> DateOfBirth = PrimitiveValueImpl [ value: 1980-12-31, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

📘 ==Column=> SSN = PrimitiveValueImpl [ value: 666100001, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

📘 ==Column=> Test = PrimitiveValueImpl [ value: xxx, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

📘 Loading Parameter Value Source row 2:

📘 ==Column=> SalesforceContactID = PrimitiveValueImpl [ value: Brad Bradford, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

📘 ==Column=> FirstName = PrimitiveValueImpl [ value: Brad, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

📘 ==Column=> LastName = PrimitiveValueImpl [ value: Bradford, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

📘 ==Column=> ICN = PrimitiveValueImpl [ value: 1013452276V180828, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

📘 ==Column=> DateOfBirth = PrimitiveValueImpl [ value: 1972-04-30, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

📘 ==Column=> SSN = PrimitiveValueImpl [ value: no value, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

📘 ==Column=> Test = PrimitiveValueImpl [ value: yyy, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

📘 Loading Parameter Value Source row 3:

📘 ==Column=> SalesforceContactID = PrimitiveValueImpl [ value: Bill Meyers, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

📘 ==Column=> FirstName = PrimitiveValueImpl [ value: Bill, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

📘 ==Column=> LastName = PrimitiveValueImpl [ value: Meyers, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

📘 ==Column=> ICN = PrimitiveValueImpl [ value: 1012881470V086192, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

📘 ==Column=> DateOfBirth = PrimitiveValueImpl [ value: 1960-01-06, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

📘 ==Column=> SSN = PrimitiveValueImpl [ value: 612-56-1111, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

📘 ==Column=> Test = PrimitiveValueImpl [ value: zzz, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① Loading Parameter Value Source row 4:

① ==Column=> SalesforceContactID = PrimitiveValueImpl [ value: Roberta Barrera Lucas, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> FirstName = PrimitiveValueImpl [ value: Roberta, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> LastName = PrimitiveValueImpl [ value: Barrera Lucas, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> ICN = PrimitiveValueImpl [ value: 1012835386V730604, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> DateOfBirth = PrimitiveValueImpl [ value: 1971-09-07, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> SSN = PrimitiveValueImpl [ value: 796098917, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> Test = PrimitiveValueImpl [ value: aaa, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① Loading Parameter Value Source row 5:

① ==Column=> SalesforceContactID = PrimitiveValueImpl [ value: David Davidson, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> FirstName = PrimitiveValueImpl [ value: David, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> LastName = PrimitiveValueImpl [ value: Davidson, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> ICN = PrimitiveValueImpl [ value: 101000000V177203, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> DateOfBirth = null

① ==Column=> SSN = null

① ==Column=> Test = PrimitiveValueImpl [ value: bbb, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① Loaded 5 rows from Parameter Value Source.

## ● Read Excel File (VA Identity Records)

⌚ 16:51:23(00:16.069)

① Loading data from Parameter Value Source ...

① Loading Parameter Value Source row 1:

① ==Column=> SalesforceContactID = PrimitiveValueImpl [ value: NWHINONE NWHINZZZTESTPATIENT, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> FirstName = PrimitiveValueImpl [ value: NWHINONE, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> LastName = PrimitiveValueImpl [ value: NWHINZZZTESTPATIENT, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> ICN = PrimitiveValueImpl [ value: 1012638924V546709, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> DateOfBirth = PrimitiveValueImpl [ value: 1980-12-31, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> SSN = PrimitiveValueImpl [ value: 666100001, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> Test = PrimitiveValueImpl [ value: xxx, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① Loading Parameter Value Source row 2:

① ==Column=> SalesforceContactID = PrimitiveValueImpl [ value: Brad Bradford, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> FirstName = PrimitiveValueImpl [ value: Brad, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> LastName = PrimitiveValueImpl [ value: Bradford, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> ICN = PrimitiveValueImpl [ value: 1013452276V180828, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> DateOfBirth = PrimitiveValueImpl [ value: 1972-04-30, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> SSN = PrimitiveValueImpl [ value: no value, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> Test = PrimitiveValueImpl [ value: yyy, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① Loading Parameter Value Source row 3:

① ==Column=> SalesforceContactID = PrimitiveValueImpl [ value: Bill Meyers, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> FirstName = PrimitiveValueImpl [ value: Bill, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> LastName = PrimitiveValueImpl [ value: Meyers, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> ICN = PrimitiveValueImpl [ value: 1012881470V086192, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> DateOfBirth = PrimitiveValueImpl [ value: 1960-01-06, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> SSN = PrimitiveValueImpl [ value: 612-56-1111, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> Test = PrimitiveValueImpl [ value: zzz, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① Loading Parameter Value Source row 4:

① ==Column=> SalesforceContactID = PrimitiveValueImpl [ value: Roberta Barrera Lucas, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> FirstName = PrimitiveValueImpl [ value: Roberta, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> LastName = PrimitiveValueImpl [ value: Barrera Lucas, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> ICN = PrimitiveValueImpl [ value: 1012835386V730604, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> DateOfBirth = PrimitiveValueImpl [ value: 1971-09-07, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> SSN = PrimitiveValueImpl [ value: 796098917, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> Test = PrimitiveValueImpl [ value: aaa, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① Loading Parameter Value Source row 5:

① ==Column=> SalesforceContactID = PrimitiveValueImpl [ value: David Davidson, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> FirstName = PrimitiveValueImpl [ value: David, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> LastName = PrimitiveValueImpl [ value: Davidson, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> ICN = PrimitiveValueImpl [ value: 101000000V177203, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> DateOfBirth = null

① ==Column=> SSN = null

① ==Column=> Test = PrimitiveValueImpl [ value: bbb, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① Loaded 5 rows from Parameter Value Source.

● Set Values: SalesforceContactID ① 16:51:23(00:16.123)

① Setting value SalesforceContactID to NWHINONE NWHINZZTESTPATIENT

⚙ Configuration: ValueScope:Test

① Successfully set SalesforceContactID to NWHINONE NWHINZZTESTPATIENT

● Set Values: FirstName ① 16:51:23(00:16.145)

① Setting value FirstName to NWHINONE

⚙ Configuration: ValueScope:Test

① Successfully set FirstName to NWHINONE

● Set Values: LastName ① 16:51:23(00:16.171)

① Setting value LastName to NWHINZZTESTPATIENT

⚙ Configuration: ValueScope:Test

① Successfully set LastName to NWHINZZTESTPATIENT

● Set Values: ICN ① 16:51:23(00:16.200)

① Setting value ICN to 1012638924V546709

⚙ Configuration: ValueScope:Test

① Successfully set ICN to 1012638924V546709

● Set Values: DateOfBirth ① 16:51:23(00:16.227)

① Setting value DateOfBirth to 1981-01-01

⚙ Configuration: ValueScope:Test

① Successfully set DateOfBirth to 1981-01-01

● Set Values: SSN ① 16:51:23(00:16.255)

① Setting value SSN to 666100001

⚙ Configuration: ValueScope:Test

① Successfully set SSN to 666100001

● Set Values: Count ① 16:51:23(00:16.280)

① Setting value Count to 2




































⚙ Configuration: ValueScope:Test

① Successfully set Count to 2

● For Each: {VAlidentityRecordFromFile}>Row ① 16:51:23(00:16.306)

① Start of iteration 1 of 5.

- Iteration 1 ⌚ 16:51:23(00:16.373)
  - SOQL Query: select Id from Contact where Name =   
'{Row.FirstName} {Row.LastName}'=>ContactRows ⌚ 16:51:23(00:16.373)
    - ⓘ Reading a Salesforce object. Connection Name: SysAdmin, Query: select Id from Contact where Name = 'NWHINONE NWHINZZZTESTPATIENT'
    - ⓘ Query successful. Row Count: 1.
  - Create Object: VA\_Identity\_\_c=>VAIdentityId ⌚ 16:51:24(00:16.705)
    - ⓘ Creating a new Salesforce object. Connection Name: SysAdmin, Name: VA\_Identity\_\_c, field count: 6
    - ⓘ Setting fields:
      - ⓘ =Field=> Date\_of\_Birth\_\_c = 1981-01-01
      - ⓘ =Field=> ICN\_\_c = 1012638924V546709
      - ⓘ =Field=> First\_Name\_\_c = NWHINONE
      - ⓘ =Field=> SSN\_\_c = 666100001
      - ⓘ =Field=> Salesforce\_Contact\_Id\_\_c = 0033R000005o6DCQAY
      - ⓘ =Field=> Last\_Name\_\_c = NWHINZZZTESTPATIENT
    - Failed to create Object. Error Messages: duplicate value found: ICN\_\_c duplicates value on record with id: a1c3R0000002OtN
  - Set Values: Header.VAIdentityId ⌚ 16:51:25(00:17.939)
    - ⓘ Setting value Header.VAIdentityId to <null>
    - ⚙ Configuration: ValueScope:Test
    - ⓘ Successfully set Header.VAIdentityId to <null>
  - Write: {Header}>templates/Output/VAIdentityRecordIDs.xlsx ⌚ 16:51:25(00:17.974)
    - ⓘ Writing to URL templates/Output/VAIdentityRecordIDs.xlsx
    - ⓘ Start of Excel Write. WorkbookPath: templates/Output/VAIdentityRecordIDs.xlsx, excludeCols: [none]
    - ⓘ Workbook location: C:\Users\LydseGedge\Provar\VAHC\VAHC\templates\Output\VAIdentityRecordIDs.xlsx
    - ⓘ Writing data to excel sheet: Sheet0
    - ⓘ Got NamedValueList: NamedValueListValueImpl [ valueCount: 1, valueId=1000000000000e, createdUpdateSeq=114, updatedUpdateSeq=115, values: [[id: 1000000000000f,entryName: VAIdentityId,entryId: null]]]
    - ⓘ Match Locator resolved to: 2
    - ⓘ Completed writing data to excel sheet: Sheet0
  - Set Values: Count ⌚ 16:51:25(00:18.039)
    - ⓘ Setting value Count to 3
    - ⚙ Configuration: ValueScope:Test
    - ⓘ Successfully set Count to 3
- ⓘ Start of iteration 2 of 5.
- Iteration 2 ⌚ 16:51:25(00:18.090)
  - SOQL Query: select Id from Contact where Name =   
'{Row.FirstName} {Row.LastName}'=>ContactRows ⌚ 16:51:25(00:18.090)
    - ⓘ Reading a Salesforce object. Connection Name: SysAdmin, Query: select Id from Contact where Name = 'Brad Bradford'
    - ⓘ Query successful. Row Count: 1.
  - Create Object: VA\_Identity\_\_c=>VAIdentityId ⌚ 16:51:26(00:18.425)
    - ⓘ Creating a new Salesforce object. Connection Name: SysAdmin, Name: VA\_Identity\_\_c, field count: 6
    - ⓘ Setting fields:
      - ⓘ =Field=> Date\_of\_Birth\_\_c = 1972-05-01
      - ⓘ =Field=> ICN\_\_c = 1013452276V180828
      - ⓘ =Field=> First\_Name\_\_c = Brad
      - ⓘ =Field=> SSN\_\_c = no value
      - ⓘ =Field=> Salesforce\_Contact\_Id\_\_c = 0033R000005qDaGQAU
      - ⓘ =Field=> Last\_Name\_\_c = Bradford

-  VA Identity created successfully. Object Id: a1c3R00000039AWQAY, Result Name: VAIdentityId
  -  Logging Salesforce Object Id for clean up. Object Name: VA\_Identity\_\_c, id: a1c3R00000039AWQAY
- **Set Values: Header.VAIdentityId** ⌚ 16:51:26(00:19.256)
  -  Setting value Header.VAIdentityId to a1c3R00000039AWQAY
  -  Configuration: ValueScope:Test
  -  Successfully set Header.VAIdentityId to a1c3R00000039AWQAY
- **Write: {Header}=>templates/Output/VAIdentityRecordIDs.xlsx** ⌚ 16:51:26(00:19.288)
  -  Writing to URL templates/Output/VAIdentityRecordIDs.xlsx
  -  Start of Excel Write. WorkbookPath: templates/Output/VAIdentityRecordIDs.xlsx, excludeCols: [none]
  -  Workbook location: C:\Users\LydseGedge\Provar\VAHC\VAHC\templates\Output\VAIdentityRecordIDs.xlsx
  -  Writing data to excel sheet: Sheet0
  -  Got NamedValueList: NamedValueListValueImpl [ valueCount: 1, valueId=1000000000000e, createdUpdateSeq=114, updatedUpdateSeq=127, values: [[id: 10000000000015,entryName: VAIdentityId,entryId: 29d]]]
  -  Match Locator resolved to: 3
  -  Completed writing data to excel sheet: Sheet0
- **Set Values: Count** ⌚ 16:51:26(00:19.342)
  -  Setting value Count to 4
  -  Configuration: ValueScope:Test
  -  Successfully set Count to 4
-  Start of iteration 3 of 5.
- **Iteration 3** ⌚ 16:51:26(00:19.406)
  - **SOQL Query: select Id from Contact where Name =** ⌚ 16:51:27(00:19.407)  
'{Row.FirstName} {Row.LastName}'=>ContactRows
    -  Reading a Salesforce object. Connection Name: SysAdmin, Query: select Id from Contact where Name = 'Bill Meyers'
    -  Query successful. Row Count: 1.
  - **Create Object: VA\_Identity\_\_c=>VAIdentityId** ⌚ 16:51:27(00:19.714)
    -  Creating a new Salesforce object. Connection Name: SysAdmin, Name: VA\_Identity\_\_c, field count: 6
    -  Setting fields:
    -  =Field=> Date\_of\_Birth\_\_c = 1960-01-07
    -  =Field=> ICN\_\_c = 1012881470V086192
    -  =Field=> First\_Name\_\_c = Bill
    -  =Field=> SSN\_\_c = 612-56-1111
    -  =Field=> Salesforce\_Contact\_Id\_\_c = 0033R000005qDalQAU
    -  =Field=> Last\_Name\_\_c = Meyers
    -  VA Identity created successfully. Object Id: a1c3R00000039AbQAI, Result Name: VAIdentityId
    -  Logging Salesforce Object Id for clean up. Object Name: VA\_Identity\_\_c, id: a1c3R00000039AbQAI
  - **Set Values: Header.VAIdentityId** ⌚ 16:51:28(00:20.541)
    -  Setting value Header.VAIdentityId to a1c3R00000039AbQAI
    -  Configuration: ValueScope:Test
    -  Successfully set Header.VAIdentityId to a1c3R00000039AbQAI
  - **Write: {Header}=>templates/Output/VAIdentityRecordIDs.xlsx** ⌚ 16:51:28(00:20.575)
    -  Writing to URL templates/Output/VAIdentityRecordIDs.xlsx
    -  Start of Excel Write. WorkbookPath: templates/Output/VAIdentityRecordIDs.xlsx, excludeCols: [none]
    -  Workbook location: C:\Users\LydseGedge\Provar\VAHC\VAHC\templates\Output\VAIdentityRecordIDs.xlsx
    -  Writing data to excel sheet: Sheet0
    -  Got NamedValueList: NamedValueListValueImpl [ valueCount: 1, valueId=1000000000000e, createdUpdateSeq=114, updatedUpdateSeq=139, values: [[id: 1000000000001b,entryName: VAIdentityId,entryId: 2af]]]
    -  Match Locator resolved to: 4

Completed writing data to excel sheet: Sheet0

- Set Values: Count

① Setting value Count to 5

Configuration: ValueScope:Test

① Successfully set Count to 5

Start of iteration 4 of 5.

- Iteration 4

- SOQL Query: select Id from Contact where Name =

```
'{Row.FirstName} {Row.LastName}'=>ContactRows
```

📘 Reading a Salesforce object. Connection Name: SysAdmin, Query: select Id from Contact where Name = 'Roberta Barrera Lucas'

❗ The query returned no records.

- Create Object: VA\_Identity\_\_c=>VAIdentityId

❗ Creating a new Salesforce object. Connection Name: SysAdmin, Name: VA\_Identity\_\_c, field count: 6

④ Setting fields:

① =Field=> Date\_of\_Birth\_\_c = 1971-09-08

 =Field=> ICN\_\_c = 1012835386V730604

① =Field=> First\_Name\_\_c = Roberta

**i** =Field=> SSN\_\_c = 796098917

① =Field=> Salesforce\_Contact\_Id\_\_c = <null>

① =Field=> Last\_Name\_\_c = Barrera Lucas

 VA Identity created successfully. Object Id: a1c3R00000039AgQAI, Result Name: VAIdentityId

Logging Salesforce Object Id for clean up. Object Name: VA\_Identity\_\_c, id: a1c3R00000039AgQAI

- Set Values: Header.VAIdentityId

Setting value Header.VAIdentityId to a1c3R00000039AgQAI

Configuration: ValueScope:Test

 Successfully set Header.VAIdentityId to a1c3R00000039AgQAI

- Write: {Header}=>templates/Output/VAlidentityRecordIDs.xlsx

 Writing to URL templates/Output/VAIdentityRecordIDs.xlsx

Start of Excel Write. WorkbookPath: templates/Output/VAIdentityRecordIDs.xlsx, excludeCols: [none]

 Workbook location: C:\Users\LydseGedge\Provar\VAHC\VAHC\templates\Output\VAIdentityRecordIDs.xlsx

① Writing data to excel sheet: Sheet0

④ Got NamedValueCollection: NamedValueCollectionValueImpl [ valueCount: 1, valueId=1000000000000e, createdUpdateSeq=114, updatedUpdateSeq=151, values: [[id: 10000000000001e,entryName: VAlidentityId,entryId: 2c1]]]

Match Locator resolved to: 5

Completed writing data to excel sheet: Sheet0

- Set Values: Count

① Setting value Count to 6

Configuration: ValueScope:Test

④ Successfully set Count to 6

Start of iteration 5 of 5.

- Iteration 5

- SOQL Query: select Id from Contact where Name =

```
'{Row.FirstName} {Row.LastName}'=>ContactRows
```

 Reading a Salesforce object. Connection Name: SysAdmin, Query: select Id from Contact where Name = 'David Davidson'

 Query successful. Row Count: 1.

- Create Object: VA Identity  $c \Rightarrow VAIdentityId$

❖ Creating a new Salesforce object. Connection Name: SysAdmin. Name: VA Identity c. field count: 6

 **Setting fields:**



① =Field=> Date\_of\_Birth\_\_c = <null>

① =Field=> ICN\_\_c = 1010000000V177203

① =Field=> First\_Name\_\_c = David

① =Field=> SSN\_\_c = <null>

① =Field=> Salesforce\_Contact\_Id\_\_c = 0033R000005qDa4QAE

① =Field=> Last\_Name\_\_c = Davidson

📄 VA Identity created successfully. Object Id: a1c3R00000039AIQAI, Result Name: VAIdentityId

① Logging Salesforce Object Id for clean up. Object Name: VA\_Identity\_\_c, id: a1c3R00000039AIQAI

## ● Set Values: Header.VAIdentityId

⌚ 16:51:30(00:23.116)

① Setting value Header.VAIdentityId to a1c3R00000039AIQAI

⚙ Configuration: ValueScope:Test

① Successfully set Header.VAIdentityId to a1c3R00000039AIQAI

## ● Write: {Header}=>templates/Output/VAIdentityRecordIDs.xlsx

⌚ 16:51:30(00:23.169)

① Writing to URL templates/Output/VAIdentityRecordIDs.xlsx

① Start of Excel Write. WorkbookPath: templates/Output/VAIdentityRecordIDs.xlsx, excludeCols: [none]

① Workbook location: C:\Users\LydseGedge\Provar\VAHC\VAHC\templates\Output\VAIdentityRecordIDs.xlsx

① Writing data to excel sheet: Sheet0

① Got NamedValueList: NamedValueListValueImpl [ valueCount: 1, valueId=1000000000000e, createdUpdateSeq=114, updatedUpdateSeq=163, values: [[id: 10000000000024,entryName: VAIdentityId,entryId: 2d3]]]

① Match Locator resolved to: 6

① Completed writing data to excel sheet: Sheet0

## ● Set Values: Count

⌚ 16:51:30(00:23.227)

① Setting value Count to 7

⚙ Configuration: ValueScope:Test

① Successfully set Count to 7

① Reached the end of the List.

① Handling managed resource. Name: SysAdmin

⚙ Closing Salesforce Connection because it is no longer being used. Name: SysAdmin

⚙ Shutting down Soap Connections. logFilePath: SysAdmin-objectids.log

① Salesforce Connection handled successfully. Name: SysAdmin

## 03. Update VA Identity Records to Complete.testcase

### Summary

Started 06 Sep 2022, 16:51:30  
Ended 06 Sep 2022, 16:51:39  
Duration (mm:ss) 00:08.691  
Outcome ● successful

### Output

#### ● Salesforce Connect: SysAdmin (Test)

16:51:30(00:23.294)

Connecting to Salesforce as SysAdmin

Connection details. Connection name: SysAdmin, result name: SysAdmin, result scope: Test, urlString: sf:user=Lydse.gedge@vavet.gov.reg;password={password};securityToken={securityToken};environment=OTHER;apiLoginUrl=https://va-vet--reg.my.salesforce.com;userLoginUrl=https://va-vet--reg.my.salesforce.com;webBaseUrl=https://va-vet--reg.my.salesforce.com;lightningMode=true, environment: VAVET\_REG, userName: Lydse.gedge@vavet.gov.reg, password: [supplied] securityToken: [supplied]

Create object id log file.

Opening Partner connection

Opening SOAP connection

Opening Metadata connection

Successfully connected to Salesforce as SysAdmin

Loading data from Parameter Value Source ...

Loading Parameter Value Source row 1:

==Column=> SalesforceContactID = PrimitiveValueImpl [ value: NWHINONE NWHINZZZTESTPATIENT, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> FirstName = PrimitiveValueImpl [ value: NWHINONE, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> LastName = PrimitiveValueImpl [ value: NWHINZZZTESTPATIENT, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> ICN = PrimitiveValueImpl [ value: 1012638924V546709, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> DateOfBirth = PrimitiveValueImpl [ value: 1980-12-31, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> SSN = PrimitiveValueImpl [ value: 666100001, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> Test = PrimitiveValueImpl [ value: xxx, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

Loading Parameter Value Source row 2:

==Column=> SalesforceContactID = PrimitiveValueImpl [ value: Brad Bradford, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> FirstName = PrimitiveValueImpl [ value: Brad, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> LastName = PrimitiveValueImpl [ value: Bradford, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> ICN = PrimitiveValueImpl [ value: 1013452276V180828, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> DateOfBirth = PrimitiveValueImpl [ value: 1972-04-30, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> SSN = PrimitiveValueImpl [ value: no value, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> Test = PrimitiveValueImpl [ value: yyy, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

Loading Parameter Value Source row 3:

==Column=> SalesforceContactID = PrimitiveValueImpl [ value: Bill Meyers, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> FirstName = PrimitiveValueImpl [ value: Bill, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> LastName = PrimitiveValueImpl [ value: Meyers, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> ICN = PrimitiveValueImpl [ value: 1012881470V086192, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> DateOfBirth = PrimitiveValueImpl [ value: 1960-01-06, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> SSN = PrimitiveValueImpl [ value: 612-56-1111, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> Test = PrimitiveValueImpl [ value: zzz, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① Loading Parameter Value Source row 4:

① ==Column=> SalesforceContactID = PrimitiveValueImpl [ value: Roberta Barrera Lucas, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> FirstName = PrimitiveValueImpl [ value: Roberta, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> LastName = PrimitiveValueImpl [ value: Barrera Lucas, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> ICN = PrimitiveValueImpl [ value: 1012835386V730604, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> DateOfBirth = PrimitiveValueImpl [ value: 1971-09-07, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> SSN = PrimitiveValueImpl [ value: 796098917, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> Test = PrimitiveValueImpl [ value: aaa, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① Loading Parameter Value Source row 5:

① ==Column=> SalesforceContactID = PrimitiveValueImpl [ value: David Davidson, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> FirstName = PrimitiveValueImpl [ value: David, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> LastName = PrimitiveValueImpl [ value: Davidson, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> ICN = PrimitiveValueImpl [ value: 101000000V177203, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> DateOfBirth = null

① ==Column=> SSN = null

① ==Column=> Test = PrimitiveValueImpl [ value: bbb, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① Loaded 5 rows from Parameter Value Source.

## ● Read Excel File (VA Identity Records)

⌚ 16:51:32(00:25.391)

① Loading data from Parameter Value Source ...

① Loading Parameter Value Source row 1:

① ==Column=> SalesforceContactID = PrimitiveValueImpl [ value: NWHINONE NWHINZZZTESTPATIENT, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> FirstName = PrimitiveValueImpl [ value: NWHINONE, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> LastName = PrimitiveValueImpl [ value: NWHINZZZTESTPATIENT, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> ICN = PrimitiveValueImpl [ value: 1012638924V546709, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> DateOfBirth = PrimitiveValueImpl [ value: 1980-12-31, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> SSN = PrimitiveValueImpl [ value: 666100001, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> Test = PrimitiveValueImpl [ value: xxx, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① Loading Parameter Value Source row 2:

① ==Column=> SalesforceContactID = PrimitiveValueImpl [ value: Brad Bradford, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> FirstName = PrimitiveValueImpl [ value: Brad, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> LastName = PrimitiveValueImpl [ value: Bradford, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> ICN = PrimitiveValueImpl [ value: 1013452276V180828, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> DateOfBirth = PrimitiveValueImpl [ value: 1972-04-30, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> SSN = PrimitiveValueImpl [ value: no value, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> Test = PrimitiveValueImpl [ value: yyy, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① Loading Parameter Value Source row 3:

① ==Column=> SalesforceContactID = PrimitiveValueImpl [ value: Bill Meyers, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> FirstName = PrimitiveValueImpl [ value: Bill, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> LastName = PrimitiveValueImpl [ value: Meyers, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> ICN = PrimitiveValueImpl [ value: 1012881470V086192, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> DateOfBirth = PrimitiveValueImpl [ value: 1960-01-06, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> SSN = PrimitiveValueImpl [ value: 612-56-1111, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> Test = PrimitiveValueImpl [ value: zzz, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① Loading Parameter Value Source row 4:

① ==Column=> SalesforceContactID = PrimitiveValueImpl [ value: Roberta Barrera Lucas, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> FirstName = PrimitiveValueImpl [ value: Roberta, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> LastName = PrimitiveValueImpl [ value: Barrera Lucas, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> ICN = PrimitiveValueImpl [ value: 1012835386V730604, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> DateOfBirth = PrimitiveValueImpl [ value: 1971-09-07, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> SSN = PrimitiveValueImpl [ value: 796098917, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> Test = PrimitiveValueImpl [ value: aaa, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① Loading Parameter Value Source row 5:

① ==Column=> SalesforceContactID = PrimitiveValueImpl [ value: David Davidson, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> FirstName = PrimitiveValueImpl [ value: David, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> LastName = PrimitiveValueImpl [ value: Davidson, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> ICN = PrimitiveValueImpl [ value: 101000000V177203, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① ==Column=> DateOfBirth = null

① ==Column=> SSN = null

① ==Column=> Test = PrimitiveValueImpl [ value: bbb, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

① Loaded 5 rows from Parameter Value Source.

### ● Set Values: FirstName

⌚ 16:51:33(00:25.449)

① Setting value FirstName to NWHINONE

⚙ Configuration: ValueScope:Test

① Successfully set FirstName to NWHINONE

### ● Set Values: LastName

⌚ 16:51:33(00:25.471)

① Setting value LastName to NWHINZZZTESTPATIENT

⚙ Configuration: ValueScope:Test

① Successfully set LastName to NWHINZZZTESTPATIENT

### ● For Each: {VAIdentityRecordFromFile}>Row

⌚ 16:51:33(00:25.499)

① Start of iteration 1 of 5.

#### ● Iteration 1

⌚ 16:51:33(00:25.570)

● SOQL Query: select Id from VA\_Identity\_\_c where  
First\_Name\_\_c = '{Row.FirstName}'=>VA\_Identity\_RecordId

⌚ 16:51:33(00:25.571)

① Reading a Salesforce object. Connection Name: SysAdmin, Query: select Id from VA\_Identity\_\_c where First\_Name\_\_c = 'NWHINONE'

① Query successful. Row Count: 1.

● Update Object: VA\_Identity\_\_c = {VA\_Identity\_RecordId.Id}

⌚ 16:51:33(00:25.891)

① Updating an existing Salesforce object. Connection Name: SysAdmin, Name: VA\_Identity\_\_c, Id: a1c3R0000002OtNQAU, field count: 1

① Setting fields:

① =Field=> MPI\_Correlation\_Status\_\_c = Completed

■ VA Identity updated successfully. Object Id: a1c3R0000002OtNQAU

① Start of iteration 2 of 5.

#### ● Iteration 2

⌚ 16:51:34(00:26.785)

● SOQL Query: select Id from VA\_Identity\_\_c where  
First\_Name\_\_c = '{Row.FirstName}'=>VA\_Identity\_RecordId

⌚ 16:51:34(00:26.786)

① Reading a Salesforce object. Connection Name: SysAdmin, Query: select Id from VA\_Identity\_\_c where First\_Name\_\_c = 'Brad'

① Query successful. Row Count: 1.

● Update Object: VA\_Identity\_\_c = {VA\_Identity\_RecordId.Id}

⌚ 16:51:34(00:27.100)

① Updating an existing Salesforce object. Connection Name: SysAdmin, Name: VA\_Identity\_\_c, Id: a1c3R00000039AWQAY, field count: 1

① Setting fields:

① =Field=> MPI\_Correlation\_Status\_\_c = Completed

■ VA Identity updated successfully. Object Id: a1c3R00000039AWQAY

① Start of iteration 3 of 5.

● Iteration 3

⌚ 16:51:35(00:28.289)

● SOQL Query: select Id from VA\_Identity\_\_c where  
First\_Name\_\_c = '{Row.FirstName}'=>VA\_Identity\_RecordId

⌚ 16:51:35(00:28.290)

① Reading a Salesforce object. Connection Name: SysAdmin, Query: select Id from VA\_Identity\_\_c where First\_Name\_\_c = 'Bill'

① Query successful. Row Count: 1.

● Update Object: VA\_Identity\_\_c = {VA\_Identity\_RecordId.Id}

⌚ 16:51:36(00:28.413)

① Updating an existing Salesforce object. Connection Name: SysAdmin, Name: VA\_Identity\_\_c, Id: a1c3R00000039AbQAI, field count: 1

① Setting fields:

① =Field=> MPI\_Correlation\_Status\_\_c = Completed

📄 VA Identity updated successfully. Object Id: a1c3R00000039AbQAI

① Start of iteration 4 of 5.

● Iteration 4

⌚ 16:51:37(00:29.458)

● SOQL Query: select Id from VA\_Identity\_\_c where  
First\_Name\_\_c = '{Row.FirstName}'=>VA\_Identity\_RecordId

⌚ 16:51:37(00:29.459)

① Reading a Salesforce object. Connection Name: SysAdmin, Query: select Id from VA\_Identity\_\_c where First\_Name\_\_c = 'Roberta'

① Query successful. Row Count: 1.

● Update Object: VA\_Identity\_\_c = {VA\_Identity\_RecordId.Id}

⌚ 16:51:37(00:29.763)

① Updating an existing Salesforce object. Connection Name: SysAdmin, Name: VA\_Identity\_\_c, Id: a1c3R00000039AgQAI, field count: 1

① Setting fields:

① =Field=> MPI\_Correlation\_Status\_\_c = Completed

📄 VA Identity updated successfully. Object Id: a1c3R00000039AgQAI

① Start of iteration 5 of 5.

● Iteration 5

⌚ 16:51:37(00:30.405)

● SOQL Query: select Id from VA\_Identity\_\_c where  
First\_Name\_\_c = '{Row.FirstName}'=>VA\_Identity\_RecordId

⌚ 16:51:37(00:30.405)

① Reading a Salesforce object. Connection Name: SysAdmin, Query: select Id from VA\_Identity\_\_c where First\_Name\_\_c = 'David'

① Query successful. Row Count: 1.

● Update Object: VA\_Identity\_\_c = {VA\_Identity\_RecordId.Id}

⌚ 16:51:38(00:30.716)

① Updating an existing Salesforce object. Connection Name: SysAdmin, Name: VA\_Identity\_\_c, Id: a1c3R00000039AIQAI, field count: 1

① Setting fields:

① =Field=> MPI\_Correlation\_Status\_\_c = Completed

📄 VA Identity updated successfully. Object Id: a1c3R00000039AIQAI

① Reached the end of the List.

① Handling managed resource. Name: SysAdmin

⚙ Closing Salesforce Connection because it is no longer being used. Name: SysAdmin

⚙ Shutting down Soap Connections. logFilePath: SysAdmin-objectids.log

① Salesforce Connection handled successfully. Name: SysAdmin