

# Test Run Report



## Test Run Overview


---

Started 16 Sep 2022, 14:40:57  
Ended 16 Sep 2022, 14:41:13  
Duration (mm:ss) 00:16.212

## Test Results Summary

---

Passed 3  
Failed 0  
Skipped 0

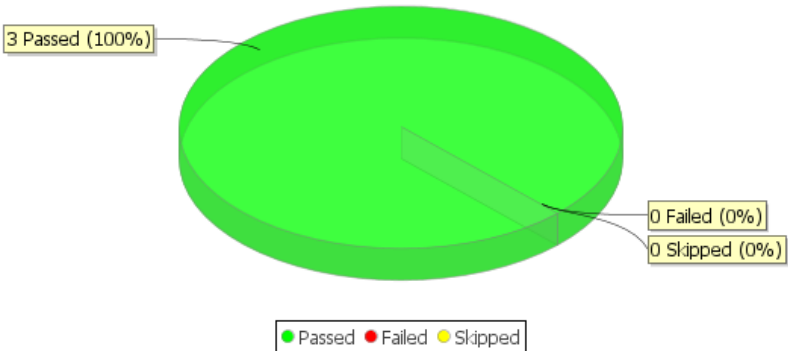

## Test Case Summary

---

tests	● successful
API Tests	● successful
Create Account and VA Identity Record	● successful
01. Create Account with API.testcase	● successful
02. Create VA Identity Record.testcase	● successful
03. Update VA Identity Records to Complete.testcase	● successful

## 01. Create Account with API.testcase

### Summary

Started 16 Sep 2022, 14:40:57  
Ended 16 Sep 2022, 14:41:03  
Duration (mm:ss) 00:05.457  
Outcome ● successful

### Output

#### ● Salesforce Connect: SysAdmin (Test)

14:40:57(00:00.027)

Connecting to Salesforce as SysAdmin

Connection details. Connection name: SysAdmin, result name: SysAdmin, result scope: Test, urlString: sf:user=lydse.gedge@va-vet.dtcsga;password={password};securityToken={securityToken};environment=OTHER;apiLoginUrl=https://va-vet--dtcsqa.my.salesforce.com;userLoginUrl=https://va-vet--dtcsqa.my.salesforce.com;webBaseUrl=https://va-vet--dtcsqa.my.salesforce.com;lightningMode=true, environment: DTCSQA, userName: lydse.gedge@va-vet.dtcsga, password: [supplied] securityToken: [supplied]

Create object id log file.

Opening Partner connection

Opening SOAP connection

Opening Metadata connection

Successfully connected to Salesforce as SysAdmin

Loading data from Parameter Value Source ...

Loading Parameter Value Source row 1:

==Column=> LastName = PrimitiveValueImpl [ value: Smith, valuelid=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> FirstName = PrimitiveValueImpl [ value: Maria, valuelid=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> Gender = PrimitiveValueImpl [ value: Female, valuelid=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> Phone = PrimitiveValueImpl [ value: 111-111-1111, valuelid=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> EmergencyContact = PrimitiveValueImpl [ value: Bob Smith, valuelid=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> MPIExternalID = PrimitiveValueImpl [ value: 111, valuelid=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> DOB = PrimitiveValueImpl [ value: 2000-12-31, valuelid=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> RecordTypeID = PrimitiveValueImpl [ value: Person Account, valuelid=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

Loading Parameter Value Source row 2:

==Column=> LastName = PrimitiveValueImpl [ value: Gold, valuelid=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> FirstName = PrimitiveValueImpl [ value: Joe, valuelid=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> Gender = PrimitiveValueImpl [ value: Male, valuelid=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> Phone = PrimitiveValueImpl [ value: 222-222-2222, valuelid=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> EmergencyContact = PrimitiveValueImpl [ value: Jane Gold, valuelid=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> MPIExternalID = PrimitiveValueImpl [ value: 222333, valuelid=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> DOB = PrimitiveValueImpl [ value: 2002-02-01, valuelid=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> RecordTypeID = PrimitiveValueImpl [ value: Person Account, valuelid=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

Loading Parameter Value Source row 3:

==Column=> LastName = PrimitiveValueImpl [ value: Kitty, valuelid=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> FirstName = PrimitiveValueImpl [ value: Hello, valuelid=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> Gender = PrimitiveValueImpl [ value: Female, valuelid=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> Phone = PrimitiveValueImpl [ value: 333-333-3333, valuelid=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> EmergencyContact = PrimitiveValueImpl [ value: Byebye Cat, valuelid=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

ⓘ ==Column=> MPIExternalID = PrimitiveValueImpl [ value: 123456, valueld=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]  
ⓘ ==Column=> DOB = PrimitiveValueImpl [ value: 2003-03-02, valueld=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]  
ⓘ ==Column=> RecordTypeID = PrimitiveValueImpl [ value: Person Account, valueld=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]  
ⓘ Loaded 3 rows from Parameter Value Source.

## ● Read Accounts File

⌚ 14:41:00(00:03.119)

ⓘ Loading data from Parameter Value Source ...

ⓘ Loading Parameter Value Source row 1:

ⓘ ==Column=> LastName = PrimitiveValueImpl [ value: Smith, valueld=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]  
ⓘ ==Column=> FirstName = PrimitiveValueImpl [ value: Maria, valueld=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]  
ⓘ ==Column=> Gender = PrimitiveValueImpl [ value: Female, valueld=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]  
ⓘ ==Column=> Phone = PrimitiveValueImpl [ value: 111-111-1111, valueld=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]  
ⓘ ==Column=> EmergencyContact = PrimitiveValueImpl [ value: Bob Smith, valueld=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]  
ⓘ ==Column=> MPIExternalID = PrimitiveValueImpl [ value: 111, valueld=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]  
ⓘ ==Column=> DOB = PrimitiveValueImpl [ value: 2000-12-31, valueld=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]  
ⓘ ==Column=> RecordTypeID = PrimitiveValueImpl [ value: Person Account, valueld=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

ⓘ Loading Parameter Value Source row 2:

ⓘ ==Column=> LastName = PrimitiveValueImpl [ value: Gold, valueld=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]  
ⓘ ==Column=> FirstName = PrimitiveValueImpl [ value: Joe, valueld=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]  
ⓘ ==Column=> Gender = PrimitiveValueImpl [ value: Male, valueld=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]  
ⓘ ==Column=> Phone = PrimitiveValueImpl [ value: 222-222-2222, valueld=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]  
ⓘ ==Column=> EmergencyContact = PrimitiveValueImpl [ value: Jane Gold, valueld=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]  
ⓘ ==Column=> MPIExternalID = PrimitiveValueImpl [ value: 222333, valueld=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]  
ⓘ ==Column=> DOB = PrimitiveValueImpl [ value: 2002-02-01, valueld=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]  
ⓘ ==Column=> RecordTypeID = PrimitiveValueImpl [ value: Person Account, valueld=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

ⓘ Loading Parameter Value Source row 3:

ⓘ ==Column=> LastName = PrimitiveValueImpl [ value: Kitty, valueld=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]  
ⓘ ==Column=> FirstName = PrimitiveValueImpl [ value: Hello, valueld=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]  
ⓘ ==Column=> Gender = PrimitiveValueImpl [ value: Female, valueld=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]  
ⓘ ==Column=> Phone = PrimitiveValueImpl [ value: 333-333-3333, valueld=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]  
ⓘ ==Column=> EmergencyContact = PrimitiveValueImpl [ value: Byebye Cat, valueld=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]  
ⓘ ==Column=> MPIExternalID = PrimitiveValueImpl [ value: 123456, valueld=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]  
ⓘ ==Column=> DOB = PrimitiveValueImpl [ value: 2003-03-02, valueld=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]  
ⓘ ==Column=> RecordTypeID = PrimitiveValueImpl [ value: Person Account, valueld=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

ⓘ Loaded 3 rows from Parameter Value Source.

## ● Set Values: LastName

⌚ 14:41:00(00:03.177)

ⓘ Setting value LastName to Smith

⚙ Configuration: ValueScope:Test

ⓘ Successfully set LastName to Smith

## ● Set Values: FirstName

⌚ 14:41:00(00:03.200)

ⓘ Setting value FirstName to Maria

⚙ Configuration: ValueScope:Test

ⓘ Successfully set FirstName to Maria

## ● Set Values: Phone

⌚ 14:41:00(00:03.232)

ⓘ Setting value Phone to 111-111-1111

⚙ Configuration: ValueScope:Test

ⓘ Successfully set Phone to 111-111-1111

- Set Values: EmergencyContact ⌚ 14:41:00(00:03.264)
  - ① Setting value EmergencyContact to Bob Smith
  - ⚙ Configuration: ValueScope:Test
  - ① Successfully set EmergencyContact to Bob Smith
- Set Values: MPI\_External\_ID ⌚ 14:41:00(00:03.291)
  - ① Setting value MPI\_External\_ID to 111
  - ⚙ Configuration: ValueScope:Test
  - ① Successfully set MPI\_External\_ID to 111
- Set Values: Gender ⌚ 14:41:00(00:03.324)
  - ① Setting value Gender to Female
  - ⚙ Configuration: ValueScope:Test
  - ① Successfully set Gender to Female
- Set Values: DOB ⌚ 14:41:01(00:03.360)
  - ① Setting value DOB to 2001-01-01
  - ⚙ Configuration: ValueScope:Test
  - ① Successfully set DOB to 2001-01-01
- Set Values: count ⌚ 14:41:01(00:03.390)
  - ① Setting value count to 2
  - ⚙ Configuration: ValueScope:Test
  - ① Successfully set count to 2
- For Each: {AccountFieldFromFile}=>Row ⌚ 14:41:01(00:03.420)
  - ① Start of iteration 1 of 3.
  - Iteration 1 ⌚ 14:41:01(00:03.552)
    - Verify if there is an Account (Contact) with the same ICN ⌚ 14:41:01(00:03.554)
      - SOQL Query: SELECT FirstName, LastName  
FROM Contact WHERE VCC\_MVI\_External\_Id\_\_c =  
'{Row.MPIExternalID}'=>Contact ⌚ 14:41:01(00:03.576)
        - ① Reading a Salesforce object. Connection Name: SysAdmin, Query: SELECT FirstName, LastName FROM Contact WHERE  
VCC\_MVI\_External\_Id\_\_c = '111'
        - ① Query successful. Row Count: 1.
      - If: {Contact.FirstName = null} ⌚ 14:41:01(00:03.894)
        - Else ⌚ 14:41:01(00:03.923)
          - Found a contact with that ICN ⌚ 14:41:01(00:03.932)
          - Contact Name: Maria Smith ⌚ 14:41:01(00:03.954)
          - Skip to the next Account ⌚ 14:41:01(00:04.000)
        - Set Values: count ⌚ 14:41:01(00:04.045)
          - ① Setting value count to 3
          - ⚙ Configuration: ValueScope:Test
          - ① Successfully set count to 3
    - ① Start of iteration 2 of 3.
    - Iteration 2 ⌚ 14:41:01(00:04.204)
      - Verify if there is an Account (Contact) with the same ICN ⌚ 14:41:01(00:04.204)
        - SOQL Query: SELECT FirstName, LastName  
FROM Contact WHERE VCC\_MVI\_External\_Id\_\_c =  
'{Row.MPIExternalID}'=>Contact ⌚ 14:41:01(00:04.246)
          - ① Reading a Salesforce object. Connection Name: SysAdmin, Query: SELECT FirstName, LastName FROM Contact WHERE  
VCC\_MVI\_External\_Id\_\_c = '222333'
          - ① Query successful. Row Count: 1.
        - If: {Contact.FirstName = null} ⌚ 14:41:02(00:04.645)
          - Else ⌚ 14:41:02(00:04.674)
            - Found a contact with that ICN ⌚ 14:41:02(00:04.686)

- Contact Name: Joe Gold 14:41:02(00:04.708)
  - Skip to the next Account 14:41:02(00:04.755)
- Set Values: count 14:41:02(00:04.799)
  - ① Setting value count to 4
  - ⚙ Configuration: ValueScope:Test
  - ① Successfully set count to 4
- ① Start of iteration 3 of 3.
- Iteration 3 14:41:02(00:04.935)
  - Verify if there is an Account (Contact) with the same ICN 14:41:02(00:04.936)
    - SOQL Query: SELECT FirstName, LastName  
FROM Contact WHERE VCC\_MVI\_External\_Id\_\_c =  
'{Row.MPIExternalID}'=>Contact 14:41:02(00:04.956)
      - ① Reading a Salesforce object. Connection Name: SysAdmin, Query: SELECT FirstName, LastName FROM Contact WHERE  
VCC\_MVI\_External\_Id\_\_c = '123456'
      - ① Query successful. Row Count: 1.
    - If: {Contact.FirstName = null} 14:41:02(00:05.272)
      - Else 14:41:02(00:05.297)
        - Found a contact with that ICN 14:41:02(00:05.306)
        - Contact Name: Hello Kitty 14:41:02(00:05.327)
        - Skip to the next Account 14:41:03(00:05.368)
    - Set Values: count 14:41:03(00:05.407)
      - ① Setting value count to 5
      - ⚙ Configuration: ValueScope:Test
      - ① Successfully set count to 5
  - ① Reached the end of the List.
  - ① Handling managed resource. Name: SysAdmin
  - ⚙ Closing Salesforce Connection because it is no longer being used. Name: SysAdmin
  - ⚙ Shutting down Soap Connections. logFilePath: SysAdmin-objectids.log
  - ① Salesforce Connection handled successfully. Name: SysAdmin

## 02. Create VA Identity Record.testcase

### Summary

Started 16 Sep 2022, 14:41:03  
Ended 16 Sep 2022, 14:41:07  
Duration (mm:ss) 00:04.527  
Outcome ● successful

### Output

#### ● Salesforce Connect: SysAdmin (Test)

14:41:03(00:05.511)

Connecting to Salesforce as SysAdmin

Connection details. Connection name: SysAdmin, result name: SysAdmin, result scope: Test, urlString: sf:user=lydse.gedge@va-vet.dtcsga;password={password};securityToken={securityToken};environment=OTHER;apiLoginUrl=https://va-vet--dtcsqa.my.salesforce.com;userLoginUrl=https://va-vet--dtcsqa.my.salesforce.com;webBaseUrl=https://va-vet--dtcsqa.my.salesforce.com;lightningMode=true, environment: DTCSQA, userName: lydse.gedge@va-vet.dtcsga, password: [supplied] securityToken: [supplied]

Create object id log file.

Opening Partner connection

Opening SOAP connection

Opening Metadata connection

Successfully connected to Salesforce as SysAdmin

Loading data from Parameter Value Source ...

Loading Parameter Value Source row 1:

==Column=> SalesforceContactID = PrimitiveValueImpl [ value: Hello Kitty, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> FirstName = PrimitiveValueImpl [ value: Hello, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> LastName = PrimitiveValueImpl [ value: Kitty, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> ICN = PrimitiveValueImpl [ value: 123456, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> DateOfBirth = PrimitiveValueImpl [ value: 2003-03-02, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> SSN = PrimitiveValueImpl [ value: 111223333, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> Test = PrimitiveValueImpl [ value: xxx, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

Loading Parameter Value Source row 2:

==Column=> SalesforceContactID = PrimitiveValueImpl [ value: Joe Gold, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> FirstName = PrimitiveValueImpl [ value: Joe, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> LastName = PrimitiveValueImpl [ value: Gold, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> ICN = PrimitiveValueImpl [ value: 222333, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> DateOfBirth = PrimitiveValueImpl [ value: 2002-02-01, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> SSN = PrimitiveValueImpl [ value: 333221111, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> Test = PrimitiveValueImpl [ value: yyy, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

Loading Parameter Value Source row 3:

==Column=> SalesforceContactID = PrimitiveValueImpl [ value: Maria Smith, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> FirstName = PrimitiveValueImpl [ value: Maria, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> LastName = PrimitiveValueImpl [ value: Smith, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> ICN = PrimitiveValueImpl [ value: 111, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> DateOfBirth = PrimitiveValueImpl [ value: 2000-12-31, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> SSN = PrimitiveValueImpl [ value: 444556666, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> Test = PrimitiveValueImpl [ value: zzz, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

Loaded 3 rows from Parameter Value Source.

## Read Excel File (VA Identity Records)

14:41:05(00:07.386)

Loading data from Parameter Value Source ...

Loading Parameter Value Source row 1:

==Column=> SalesforceContactID = PrimitiveValueImpl [ value: Hello Kitty, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> FirstName = PrimitiveValueImpl [ value: Hello, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> LastName = PrimitiveValueImpl [ value: Kitty, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> ICN = PrimitiveValueImpl [ value: 123456, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> DateOfBirth = PrimitiveValueImpl [ value: 2003-03-02, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> SSN = PrimitiveValueImpl [ value: 111223333, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> Test = PrimitiveValueImpl [ value: xxx, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

Loading Parameter Value Source row 2:

==Column=> SalesforceContactID = PrimitiveValueImpl [ value: Joe Gold, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> FirstName = PrimitiveValueImpl [ value: Joe, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> LastName = PrimitiveValueImpl [ value: Gold, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> ICN = PrimitiveValueImpl [ value: 222333, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> DateOfBirth = PrimitiveValueImpl [ value: 2002-02-01, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> SSN = PrimitiveValueImpl [ value: 333221111, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> Test = PrimitiveValueImpl [ value: yyy, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

Loading Parameter Value Source row 3:

==Column=> SalesforceContactID = PrimitiveValueImpl [ value: Maria Smith, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> FirstName = PrimitiveValueImpl [ value: Maria, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> LastName = PrimitiveValueImpl [ value: Smith, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> ICN = PrimitiveValueImpl [ value: 111, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> DateOfBirth = PrimitiveValueImpl [ value: 2000-12-31, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> SSN = PrimitiveValueImpl [ value: 444556666, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> Test = PrimitiveValueImpl [ value: zzz, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

Loaded 3 rows from Parameter Value Source.

## Set Values: SalesforceContactID

14:41:05(00:07.439)

Setting value SalesforceContactID to Hello Kitty

Configuration: ValueScope:Test

Successfully set SalesforceContactID to Hello Kitty

## Set Values: FirstName

14:41:05(00:07.450)

Setting value FirstName to Hello

Configuration: ValueScope:Test

Successfully set FirstName to Hello

## Set Values: LastName

14:41:05(00:07.478)

Setting value LastName to Kitty

Configuration: ValueScope:Test

Successfully set LastName to Kitty

## Set Values: ICN

14:41:05(00:07.503)

Setting value ICN to 123456

Configuration: ValueScope:Test

Successfully set ICN to 123456

## Set Values: DateOfBirth

14:41:05(00:07.529)

Setting value DateOfBirth to 2003-03-03

⚙ Configuration: ValueScope:Test

ℹ Successfully set DateOfBirth to 2003-03-03

● Set Values: SSN

⌚ 14:41:05(00:07.556)

ℹ Setting value SSN to 111223333

⚙ Configuration: ValueScope:Test

ℹ Successfully set SSN to 111223333

● Set Values: Count

⌚ 14:41:05(00:07.583)

ℹ Setting value Count to 2

⚙ Configuration: ValueScope:Test

ℹ Successfully set Count to 2

● For Each: {VAIdentityRecordFromFile}=>Row

⌚ 14:41:05(00:07.610)

ℹ Start of iteration 1 of 3.

● Iteration 1

⌚ 14:41:05(00:07.722)

● Verify if the Record exists

⌚ 14:41:05(00:07.723)

● SOQL Query: select First\_Name\_\_c,  
Last\_Name\_\_c from VA\_Identity\_\_c where ICN\_\_c =  
'{Row.ICN}'=>VA\_Identity\_Record

⌚ 14:41:05(00:07.743)

ℹ Reading a Salesforce object. Connection Name: SysAdmin, Query: select First\_Name\_\_c, Last\_Name\_\_c from VA\_Identity\_\_c where ICN\_\_c = '123456'

ℹ Query successful. Row Count: 1.

● The VA Identity Record with this ICN is linked to Hello Kitty

⌚ 14:41:05(00:08.063)

● If: {VA\_Identity\_Record.First\_Name\_\_c = null}

⌚ 14:41:05(00:08.102)

● Else

⌚ 14:41:05(00:08.136)

● Found an Identity Record with this ICN

⌚ 14:41:05(00:08.145)

● Group Steps

⌚ 14:41:05(00:08.167)

● Identity Record Name: Hello Kitty

⌚ 14:41:05(00:08.197)

● Skip to the next record

⌚ 14:41:05(00:08.266)

⚠ Set Values: Count

⌚ 14:41:05(00:08.313)

ℹ Start of iteration 2 of 3.

● Iteration 2

⌚ 14:41:06(00:08.523)

● Verify if the Record exists

⌚ 14:41:06(00:08.524)

● SOQL Query: select First\_Name\_\_c,  
Last\_Name\_\_c from VA\_Identity\_\_c where ICN\_\_c =  
'{Row.ICN}'=>VA\_Identity\_Record

⌚ 14:41:06(00:08.553)

ℹ Reading a Salesforce object. Connection Name: SysAdmin, Query: select First\_Name\_\_c, Last\_Name\_\_c from VA\_Identity\_\_c where ICN\_\_c = '222333'

ℹ Query successful. Row Count: 1.

● The VA Identity Record with this ICN is linked to Joe Gold

⌚ 14:41:06(00:08.680)

● If: {VA\_Identity\_Record.First\_Name\_\_c = null}

⌚ 14:41:06(00:08.736)

● Else

⌚ 14:41:06(00:08.785)

● Found an Identity Record with this ICN

⌚ 14:41:06(00:08.798)

● Group Steps

⌚ 14:41:06(00:08.823)

● Identity Record Name: Joe Gold

⌚ 14:41:06(00:08.853)

● Skip to the next record

⌚ 14:41:06(00:08.921)

⚠ Set Values: Count

⌚ 14:41:06(00:08.972)

ℹ Start of iteration 3 of 3.

● Iteration 3

⌚ 14:41:06(00:09.218)

● Verify if the Record exists

⌚ 14:41:06(00:09.219)

● SOQL Query: select First\_Name\_\_c,  
Last\_Name\_\_c from VA\_Identity\_\_c where ICN\_\_c =  
'{Row.ICN}'=>VA\_Identity\_Record

⌚ 14:41:06(00:09.245)

ℹ Reading a Salesforce object. Connection Name: SysAdmin, Query: select First\_Name\_\_c, Last\_Name\_\_c from VA\_Identity\_\_c where ICN\_\_c = '111'



④ Query successful. Row Count: 1.

● The VA Identity Record with this ICN is linked to Maria Smith

④ 14:41:07(00:09.731)

● If: {VA\_Identity\_Record.First\_Name\_\_c = null}

④ 14:41:07(00:09.765)

● Else

④ 14:41:07(00:09.789)

● Found an Identity Record with this ICN

④ 14:41:07(00:09.801)

● Group Steps

④ 14:41:07(00:09.826)

● Identity Record Name: Maria Smith

④ 14:41:07(00:09.862)

● Skip to the next record

④ 14:41:07(00:09.900)

⚠ Set Values: Count

④ 14:41:07(00:09.941)

④ Reached the end of the List.

④ Handling managed resource. Name: SysAdmin

⚙ Closing Salesforce Connection because it is no longer being used. Name: SysAdmin

⚙ Shutting down Soap Connections. logFilePath: SysAdmin-objectids.log

④ Salesforce Connection handled successfully. Name: SysAdmin

## 03. Update VA Identity Records to Complete.testcase

### Summary

Started 16 Sep 2022, 14:41:07  
Ended 16 Sep 2022, 14:41:13  
Duration (mm:ss) 00:06.225  
Outcome ● successful

### Output

#### ● Salesforce Connect: SysAdmin (Test)

14:41:07(00:10.014)

Connecting to Salesforce as SysAdmin

Connection details. Connection name: SysAdmin, result name: SysAdmin, result scope: Test, urlString: sf:user=lydse.gedge@va-vet.dtcsga;password={password};securityToken={securityToken};environment=OTHER;apiLoginUrl=https://va-vet--dtcsqa.my.salesforce.com;userLoginUrl=https://va-vet--dtcsqa.my.salesforce.com;webBaseUrl=https://va-vet--dtcsqa.my.salesforce.com;lightningMode=true, environment: DTCSQA, userName: lydse.gedge@va-vet.dtcsga, password: [supplied] securityToken: [supplied]

Create object id log file.

Opening Partner connection

Opening SOAP connection

Opening Metadata connection

Successfully connected to Salesforce as SysAdmin

Loading data from Parameter Value Source ...

Loading Parameter Value Source row 1:

==Column=> SalesforceContactID = PrimitiveValueImpl [ value: Hello Kitty, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> FirstName = PrimitiveValueImpl [ value: Hello, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> LastName = PrimitiveValueImpl [ value: Kitty, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> ICN = PrimitiveValueImpl [ value: 123456, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> DateOfBirth = PrimitiveValueImpl [ value: 2003-03-02, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> SSN = PrimitiveValueImpl [ value: 111223333, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> Test = PrimitiveValueImpl [ value: xxx, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

Loading Parameter Value Source row 2:

==Column=> SalesforceContactID = PrimitiveValueImpl [ value: Joe Gold, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> FirstName = PrimitiveValueImpl [ value: Joe, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> LastName = PrimitiveValueImpl [ value: Gold, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> ICN = PrimitiveValueImpl [ value: 222333, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> DateOfBirth = PrimitiveValueImpl [ value: 2002-02-01, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> SSN = PrimitiveValueImpl [ value: 333221111, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> Test = PrimitiveValueImpl [ value: yyy, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

Loading Parameter Value Source row 3:

==Column=> SalesforceContactID = PrimitiveValueImpl [ value: Maria Smith, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> FirstName = PrimitiveValueImpl [ value: Maria, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> LastName = PrimitiveValueImpl [ value: Smith, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> ICN = PrimitiveValueImpl [ value: 111, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> DateOfBirth = PrimitiveValueImpl [ value: 2000-12-31, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> SSN = PrimitiveValueImpl [ value: 444556666, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> Test = PrimitiveValueImpl [ value: zzz, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

Loaded 3 rows from Parameter Value Source.

## Read Excel File (VA Identity Records)

14:41:09(00:11.956)

Loading data from Parameter Value Source ...

Loading Parameter Value Source row 1:

==Column=> SalesforceContactID = PrimitiveValueImpl [ value: Hello Kitty, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> FirstName = PrimitiveValueImpl [ value: Hello, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> LastName = PrimitiveValueImpl [ value: Kitty, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> ICN = PrimitiveValueImpl [ value: 123456, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> DateOfBirth = PrimitiveValueImpl [ value: 2003-03-02, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> SSN = PrimitiveValueImpl [ value: 111223333, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> Test = PrimitiveValueImpl [ value: xxx, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

Loading Parameter Value Source row 2:

==Column=> SalesforceContactID = PrimitiveValueImpl [ value: Joe Gold, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> FirstName = PrimitiveValueImpl [ value: Joe, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> LastName = PrimitiveValueImpl [ value: Gold, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> ICN = PrimitiveValueImpl [ value: 222333, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> DateOfBirth = PrimitiveValueImpl [ value: 2002-02-01, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> SSN = PrimitiveValueImpl [ value: 333221111, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> Test = PrimitiveValueImpl [ value: yyy, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

Loading Parameter Value Source row 3:

==Column=> SalesforceContactID = PrimitiveValueImpl [ value: Maria Smith, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> FirstName = PrimitiveValueImpl [ value: Maria, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> LastName = PrimitiveValueImpl [ value: Smith, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> ICN = PrimitiveValueImpl [ value: 111, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> DateOfBirth = PrimitiveValueImpl [ value: 2000-12-31, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> SSN = PrimitiveValueImpl [ value: 444556666, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

==Column=> Test = PrimitiveValueImpl [ value: zzz, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

Loaded 3 rows from Parameter Value Source.

## Set Values: FirstName

14:41:10(00:12.537)

Setting value FirstName to Hello

Configuration: ValueScope:Test

Successfully set FirstName to Hello

## Set Values: LastName

14:41:10(00:12.552)

Setting value LastName to Kitty

Configuration: ValueScope:Test

Successfully set LastName to Kitty

## For Each: {VAIdentityRecordFromFile}>Row

14:41:10(00:12.586)

Start of iteration 1 of 3.

### Iteration 1

14:41:10(00:12.668)

SOQL Query: select Id from VA\_Identity\_\_c where First\_Name\_\_c = '{Row.FirstName}'>VA\_Identity\_RecordId

14:41:10(00:12.669)

Reading a Salesforce object. Connection Name: SysAdmin, Query: select Id from VA\_Identity\_\_c where First\_Name\_\_c = 'Hello'

Query successful. Row Count: 1.

Update Object: VA\_Identity\_\_c = {VA\_Identity\_RecordId.Id}

14:41:10(00:12.998)

Updating an existing Salesforce object. Connection Name: SysAdmin, Name: VA\_Identity\_\_c, Id: a1c3R0000003cOpQAI, field count: 1

Setting fields:

① =Field=> MPI\_Correlation\_Status\_\_c = Completed

📄 VA Identity updated successfully. Object Id: a1c3R0000003cOpQAI

① Start of iteration 2 of 3.

## ● Iteration 2

🕒 14:41:12(00:14.761)

● SOQL Query: select Id from VA\_Identity\_\_c where  
First\_Name\_\_c = '{Row.FirstName}'=>VA\_Identity\_RecordId

🕒 14:41:12(00:14.763)

① Reading a Salesforce object. Connection Name: SysAdmin, Query: select Id from VA\_Identity\_\_c where First\_Name\_\_c = 'Joe'

① Query successful. Row Count: 1.

● Update Object: VA\_Identity\_\_c = {VA\_Identity\_RecordId.Id}

🕒 14:41:12(00:15.065)

① Updating an existing Salesforce object. Connection Name: SysAdmin, Name: VA\_Identity\_\_c, Id: a1c3R0000003cOuQAI, field count: 1

① Setting fields:

① =Field=> MPI\_Correlation\_Status\_\_c = Completed

📄 VA Identity updated successfully. Object Id: a1c3R0000003cOuQAI

① Start of iteration 3 of 3.

## ● Iteration 3

🕒 14:41:13(00:15.525)

● SOQL Query: select Id from VA\_Identity\_\_c where  
First\_Name\_\_c = '{Row.FirstName}'=>VA\_Identity\_RecordId

🕒 14:41:13(00:15.525)

① Reading a Salesforce object. Connection Name: SysAdmin, Query: select Id from VA\_Identity\_\_c where First\_Name\_\_c = 'Maria'

① Query successful. Row Count: 1.

● Update Object: VA\_Identity\_\_c = {VA\_Identity\_RecordId.Id}

🕒 14:41:13(00:15.847)

① Updating an existing Salesforce object. Connection Name: SysAdmin, Name: VA\_Identity\_\_c, Id: a1c3R0000003cOzQAI, field count: 1

① Setting fields:

① =Field=> MPI\_Correlation\_Status\_\_c = Completed

📄 VA Identity updated successfully. Object Id: a1c3R0000003cOzQAI

① Reached the end of the List.

① Handling managed resource. Name: SysAdmin

✳ Closing Salesforce Connection because it is no longer being used. Name: SysAdmin

✳ Shutting down Soap Connections. logFilePath: SysAdmin-objectids.log

① Salesforce Connection handled successfully. Name: SysAdmin