

LogiCoy eRx for OpenEMR

Client Setup Guide

From installation to your first prescription

Module version 1.0.6
September 2026

For practice administrators. You will need OpenEMR administrator access, shell access to the OpenEMR server, and the credentials pack supplied by LogiCoy.

Contents

1. Overview
2. Before you begin
3. Step 1 – Install the module files
4. Step 2 – Register, install and enable in OpenEMR
5. Step 3 – Switch the module on
6. Step 4 – Connection settings
7. Step 5 – Load the practice credential
8. Step 6 – Set up each prescriber
9. Step 7 – Register with LogiCoy
10. Step 8 – Schedule the queue worker
11. Step 9 – Verify the installation
12. Troubleshooting
13. Upgrading and uninstalling
14. Setup checklist

1. Overview

LogiCoy eRx is an OpenEMR module that connects your practice to the LogiCoy electronic prescribing network. Once configured, clinicians open the LogiCoy prescribing screen directly from a patient's chart, and prescriptions written there are reflected back into OpenEMR's own prescription records.

What the module does

- Adds a **LogiCoy eRx** card to the Patient Summary with an **Open prescribing** button.
- Stores your practice and prescriber credentials, encrypted, inside OpenEMR.
- Queues prescription traffic and syncs it with LogiCoy in the background, so a slow network connection never holds up a clinician's screen.
- Polls LogiCoy for refill requests, RxChange messages and prescription status.
- Provides a **LogiCoy eRx Log** screen for support and troubleshooting.

What LogiCoy does

All clinical logic runs on the LogiCoy backend: the drug database, interaction checks, formulary and benefit checks, Surescripts routing and EPCS signing. The module itself contains none of this. It is a thin connector, which keeps it small, auditable and easy to keep current with OpenEMR releases.

Screens in this guide come from a test installation. Identifiers, facility names and patient names shown in the figures are examples; yours will differ. Credential values are masked.

Setup at a glance

Step	Where	Who
1. Install the module files	Server shell	System administrator
2. Register, install, enable	Modules → Manage Modules	OpenEMR administrator
3. Switch the module on	Administration → Globals → LogiCoy eRx	OpenEMR administrator
4. Connection settings	Manage Modules → LogiCoy eRx → config	OpenEMR administrator
5. Load the practice credential	Same screen	OpenEMR administrator
6. Set up each prescriber	Administration → Users	OpenEMR administrator
7. Register with LogiCoy	Manage Modules → LogiCoy eRx → config	OpenEMR administrator
8. Schedule the queue worker	Server cron	System administrator
9. Verify	Patient chart	Any prescriber

2. Before you begin

System requirements

Requirement	Detail
OpenEMR	7.0.0 or later. Version 1.0.6 of the module is verified against OpenEMR 8.2.0.
PHP	8.1 or later.
Network	Outbound HTTPS from the OpenEMR server to the LogiCoy backend. No inbound connection is required; the module polls LogiCoy.
Cron	A working cron scheduler on the OpenEMR server, for the queue worker.
Access	Root or sudo on the server for the installer, and an OpenEMR account with the administrator (admin / super) permission.

What LogiCoy supplies

Your onboarding pack from LogiCoy contains everything the module needs. Keep it somewhere secure; the private key in particular must never be emailed or shared outside your practice.

Item	Used in
Installer file `install-oe-module-logicoy-erx-1.0.6.sh`	Step 1
Backend base URL, for example `https://eprescribing.logicoy.com/erxapi`	Step 4
Client ID	Step 5
eRx client registration UUID	Step 5
Private signing key (`.pem` **or** `.key` **file)**	Step 5

What you need to have ready

- The facility record in OpenEMR that will prescribe, with its full address, phone number and NPI filled in. LogiCoy validates these at registration.
- Each prescriber's OpenEMR user record with their NPI, email address and, for EPCS, DEA number.
- Each prescriber's date of birth, gender, phone number and mailing address.

3. Step 1 – Install the module files

LogiCoy supplies a single self-contained installer. It carries the whole module inside it; there is nothing else to download. Copy it to the OpenEMR server and run it as root:

```
sudo sh install-oe-module-logicoy-erx-1.0.6.sh
```

The installer finds the OpenEMR directory, checks the OpenEMR and PHP versions, places the module under `interface/modules/custom_modules/oe-module-logicoy-erx`, and gives it the ownership and permissions the web server needs. When it finishes it prints the next steps.

```
$ sudo sh install-oe-module-logicoy-erx-1.0.6.sh --container=openemr

LogiCoy eRx 1.0.6 installer

==> Unpacking
checksum ok (105b63782599b0d7326404e4e713812a69a9700bbdbd477c36a90f18586dd368)
unpacked 55 files

==> Locating OpenEMR
OpenEMR:  /var/www/localhost/htdocs/openemr
Target:   .../interface/modules/custom_modules/oe-module-logicoy-erx

==> Checking requirements
OpenEMR version 8.2.0 (minimum 7.0.0) ok
PHP 8.5 (minimum 8.1) ok
Web server user: apache:apache

==> Installing
installed 1.0.6
chown -R apache:apache ...

Next: Modules -> Manage Modules -> Register -> Install -> Enable.
```

Figure 1. A successful install. The installer checks the versions, places the module and sets its ownership, then prints the next steps.

Useful options

Option	Purpose
`--dry-run`	Report what would happen without changing anything. Run this first if you are unsure.
`--openemr-root=PATH`	Point at OpenEMR when it is somewhere the installer does not look.
`--container=NAME`	Install into a Docker container (see below).
`--extract-only=DIR`	Unpack the module and stop, for manual placement.
`--help`	List every option.

If OpenEMR runs in Docker

The module must land on the container's filesystem, not the host's. Run the installer on the host anyway. When it finds no OpenEMR on the host it looks for a container running one and offers to install into it. To name the container yourself:

```
sudo sh install-oe-module-logicoy-erx-1.0.6.sh --container=openemr
```

Important. A module installed into a container lives in the container's writable layer and is lost on the next image update or `docker compose up --force-recreate`. Either reinstall after every update, or bind-mount the module directory in your compose file so it persists. The installer writes through an existing bind mount automatically.

```
    volumes:
      - ./oe-module-logicoy-erx:/var/www/localhost/htdocs/openemr/\
```

```
interface/modules/custom_modules/oe-module-logicoy-erx
```

(Shown on two lines for readability; write it as a single line in your compose file.)

Installing by hand

If your site deploys through configuration management, unpack the module without touching OpenEMR and place the directory yourself:

```
sh install-oe-module-logicoy-erx-1.0.6.sh --extract-only=/tmp/logicoy
```

The target directory name must be exactly `oe-module-logicoy-erx`; that is how OpenEMR finds the module. It must be readable by the web server user and no more than that: directories 755, files 644.

4. Step 2 – Register, install and enable in OpenEMR

Log in to OpenEMR as an administrator.

1. Go to **Modules** → **Manage Modules**. *Modules* is a top-level menu item, not part of the Administration menu. It is only visible to users with the *menus / modle* permission.
2. Find **LogiCoy eRx** in the unregistered list and click **Register**.
3. Click **Install**. This creates the module's database tables. It is safe to repeat and never touches tables that already exist.
4. Click **Enable**.

After enabling, a **config** icon appears next to LogiCoy eRx in the module list. That icon opens the LogiCoy eRx setup screen used in Steps 4, 5 and 7.

ID	Module	Release	Status	Menu Text	Nick Name	Type	Dependency Modules	Action	Configuration
1	Advanced Prior Auth	0.0.0	Registered	Oe-module-prior-authorizations		Custom	--	Install	? R
2	LogiCoy eRx Sync and Launch	0.0.0	Active	Oe-module-logicoy-erx-sync		Custom	--	Disable	? ⚙
3	LogiCoy eRx	1.0.0	Active	Oe-module-logicoy-erx		Custom	--	Disable	? ⚙

Figure 2. Modules → Manage Modules. LogiCoy eRx after registering, installing and enabling. The config icon opens the setup screen used in Steps 4, 5 and 7.

5. Step 3 – Switch the module on

Go to **Administration** → **Globals** → **LogiCoy eRx** and turn on **Enable LogiCoy eRx**. Save.

This is the only LogiCoy setting kept in Globals. It controls whether the prescribing card is shown in patient charts. Everything else is configured on the module's own setup screen, because Globals are readable by

every administrator and are included in backups, which is not appropriate for connection details and keys.

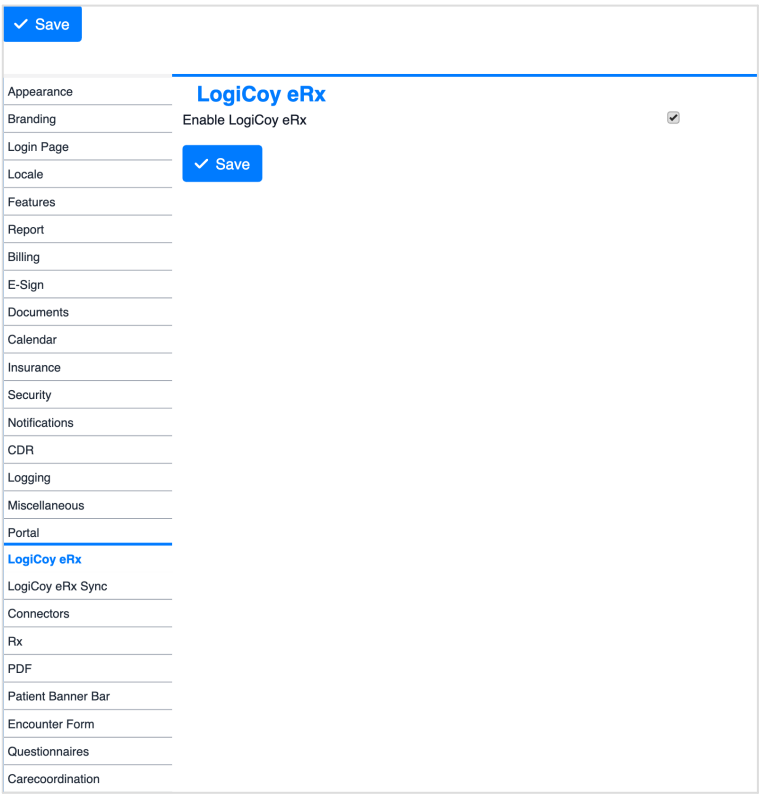


Figure 3. Administration → Globals → LogiCoy eRx. The single switch that shows or hides the prescribing card.

6. Step 4 – Connection settings

Open **Modules** → **Manage Modules** → **LogiCoy eRx** → **config icon**. The screen is titled **LogiCoy eRx Credentials**. Fill in the **Connection settings** section and click **Save settings**.

Setting	Value
Backend base URL	Supplied by LogiCoy, for example `https://eprescribing.logicoy.com/erxapi`.
Backend token URL	Leave blank unless LogiCoy tells you otherwise. Defaults to the base URL plus `/oauth2/token`.
Write to the OpenEMR prescriptions table	On. Prescriptions written through LogiCoy are reflected into OpenEMR's native prescription records.
Enable inbound polling	On. Polls LogiCoy for refill requests, RxChange and NewRx status.
Queue retry limit	How many times a queued message is retried before it is parked for support. Keep the default unless LogiCoy advises otherwise.
Backend HTTP timeout (seconds)	Timeout applied to every call to LogiCoy. Keep the default.

Setting	Value
Verbose logging	Off in normal use. Turn on only when LogiCoy support asks. It logs request metadata only, never credentials or prescription content.

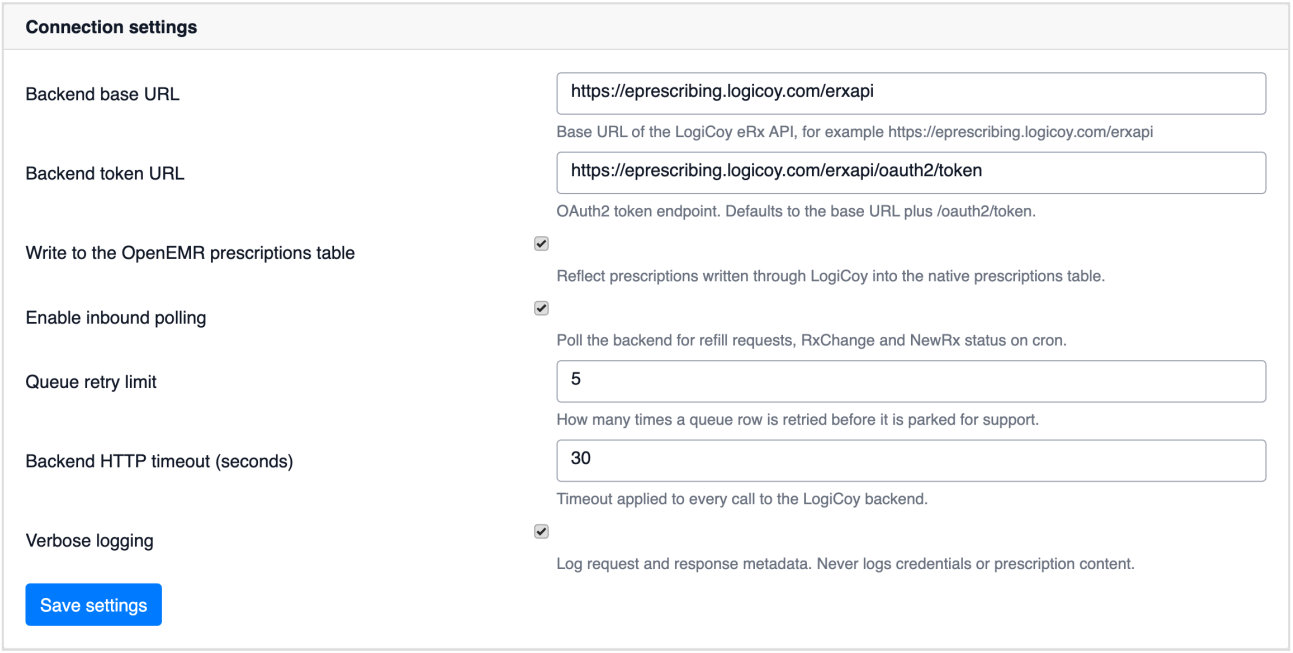


Figure 4. The Connection settings section of the LogiCoy eRx setup screen.

7. Step 5 – Load the practice credential

On the same screen, in **Add or update a credential**:

1. Choose the **Facility** that will prescribe.
2. Leave **Scope** as **Practice**. (Provider scope is only for a prescriber who has been issued their own separate client ID by LogiCoy.)
3. Enter the **Client ID** from your LogiCoy pack.
4. Enter the **eRx client registration UUID** from your LogiCoy pack. It is required to register the practice in Step 7.
5. Supply the **Signing key**: click **Choose file** and select the `.pem` / `.key` file LogiCoy gave you.
6. Click **Save credential**.

The key is encrypted with OpenEMR's own key material before it is stored, and is never displayed again. The **Loaded credentials** list only reports whether a key is present. To rotate the key later, upload a new file. To change only the client ID, leave the file field empty and the stored key is kept.

Other ways to supply the key

- **Paste the PEM** into the text box instead of uploading the file.

- **Reference a key already on the server** by absolute path. Only for keys placed by configuration management on a bare-metal or VM install. The path is checked before it is accepted and refused if the file is missing, readable by other users, or anywhere the web server could serve it.

On Docker, always upload. Do not use a path. An uploaded key is written into the OpenEMR `sites` volume, which survives a container rebuild. A path inside the container is deleted on the next rebuild, after which prescribing fails with no obvious cause. The screen warns you if it detects this.

Command-line alternative

For scripted installs, the same credential can be loaded from the shell. It must run as the web server user (typically `www-data` or `apache`); OpenEMR refuses to run it as root:

```
cd /path/to/openemr/interface/modules/custom_modules/oe-module-logicoy-erx
sudo -u www-data php scripts/load_credential.php \
    --facility=<facility id> \
    --client-id=<client id> \
    --key=/secure/path/partner_private.key

# list what is loaded (never prints key material)
sudo -u www-data php scripts/load_credential.php --list
```

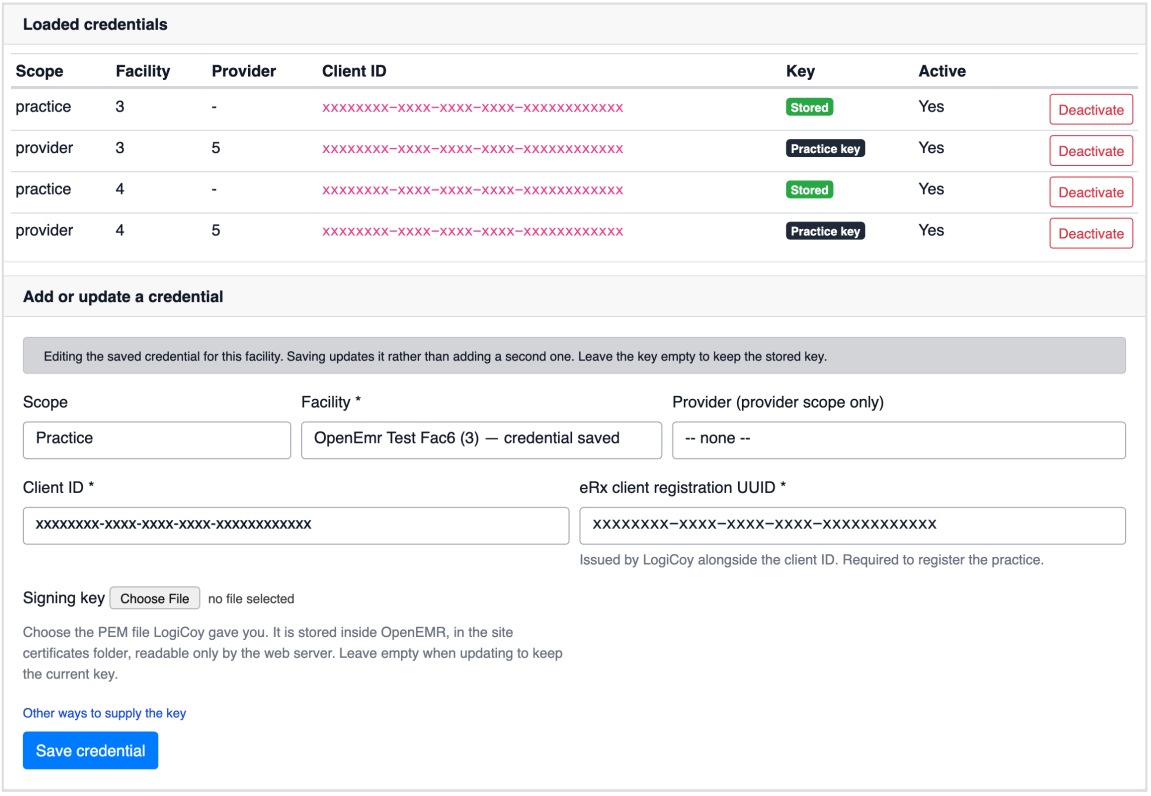


Figure 5. Add or update a credential. The signing key is uploaded here; it is encrypted before storage and never shown again.

8. Step 6 – Set up each prescriber

Go to **Administration** → **Users** and open each prescriber (or **Add User**). Make sure the core fields **NPI** and **Email** are filled in, plus **DEA number** for EPCS prescribers. Then scroll to the **LogiCoy eRx** block below the core fields:

Field	Required?	Notes
Date of Birth	Yes	LogiCoy refuses a prescriber under 18.
Gender	Yes	Male, Female or Other. LogiCoy accepts nothing else.
eRx Prescribing Type	Yes	**eRx** or **EPCS**. Defaults to eRx. See below.
Phone, Street, City, State, ZIP	Yes	Saved to the user's OpenEMR address record, so there is only ever one address per user.
DEA Expiration Date	EPCS only	
DEA State	EPCS only	Two-letter code.
SSN (last 4)	EPCS only	Four digits, encrypted at rest. Never shown again once saved; leave blank to keep it, tick **Remove stored SSN** to clear it.

eRx or EPCS?

- **eRx** registers the prescriber for non-controlled substances only. Controlled substances are blocked at the backend.
- **EPCS** (Electronic Prescribing of Controlled Substances) additionally requires the DEA number and the three EPCS-only fields. Registration is refused with a message naming what is missing rather than half-registering the prescriber.
- Changing the type after a prescriber is registered means re-registering them in Step 7.

Save the user. Everything in this block is sent to LogiCoy when the prescriber is registered in the next step.

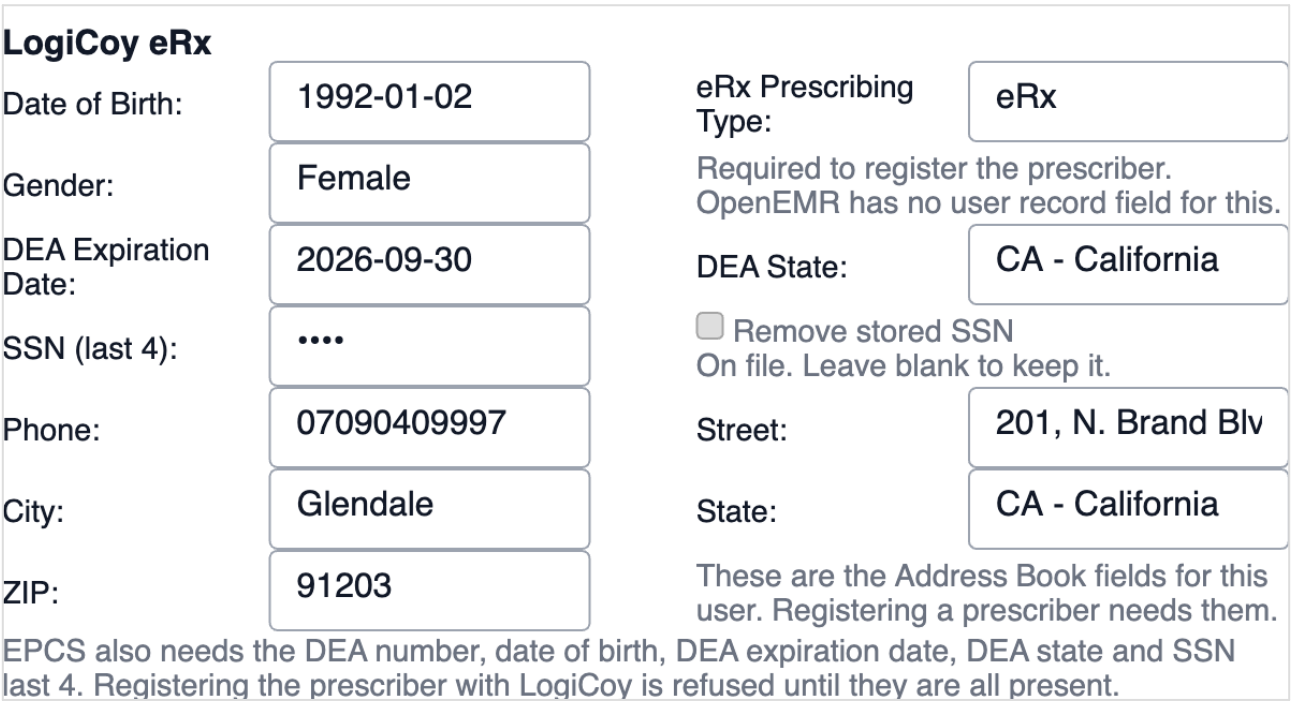


Figure 6. The LogiCoy eRx block on Administration → Users, below the core user fields.

9. Step 7 – Register with LogiCoy

Return to **Modules** → **Manage Modules** → **LogiCoy eRx** → **config icon**. The **Register with LogiCoy** section has three steps. Run each once, in order. There is nothing to type; the identifiers LogiCoy issues are stored automatically.

1. **Practice** – click **Register**. Sends your facility details to LogiCoy and stores the practice identifier.
2. **Service location** – click **Register**. Registers the facility as a prescribing location.
3. **Prescriber** – choose a prescriber from the list and click **Register**. Repeat for each prescriber. Requires an NPI on the user record.

Each row shows **Not registered** until its step succeeds. If a step cannot run yet, the screen lists what is still missing (for example a credential not yet saved, or an EPCS prescriber without a DEA expiry date). Fix the item named, then retry.

If the screen has been open for a long time it may report that its security token no longer matches your session. Nothing was sent. Reload the screen and, before registering again, check whether the previous attempt already went through.

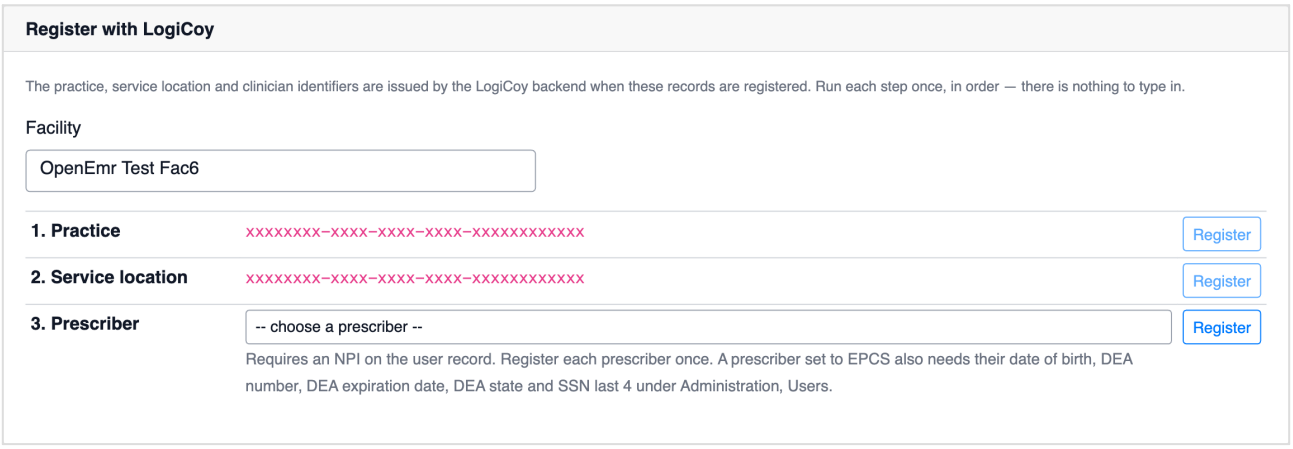


Figure 7. Register with LogiCoy. Run Practice, then Service location, then each Prescriber.

10. Step 8 – Schedule the queue worker

Prescription traffic is queued, never sent inline, so a slow backend can never hold up a clinician's screen. A cron job drains the queue and polls LogiCoy for inbound messages. Add one line per facility to the web server user's crontab:

```
*/5 * * * * php /path/to/openemr/interface/modules/custom_modules/\
    oe-module-logicoy-erx/scripts/queue_worker.php --facility=1
```

(Shown on two lines for readability; a crontab entry must be a single line.)

Replace `/path/to/openemr` with your OpenEMR directory and `--facility=1` with the facility ID you registered. In Docker, run the job inside the container, for example with `docker compose exec -T openemr php ...`.

The worker is safe to run concurrently and safe to replay. If cron fires twice, no prescription is sent or written twice. Every message carries a LogiCoy message ID that is used to reject duplicates.

11. Step 9 – Verify the installation

1. Log in as a registered prescriber and open any patient chart.
2. On **Patient Summary**, confirm a **LogiCoy eRx** card appears with an **Open prescribing** button.
3. Click **Open prescribing**. The LogiCoy prescribing screen opens in the patient's context.
4. Write a test prescription on a test patient, then confirm it appears in the patient's OpenEMR prescription list within one worker cycle (five minutes with the cron line above).
5. Open **Modules** → **LogiCoy eRx Log** and confirm the queue entry shows as sent.

If the card is missing, check in order:

- The module is **Enabled** in Manage Modules.
- **Enable LogiCoy eRx** is on in Administration → Globals → LogiCoy eRx.

- The logged-in user has the same prescribing permission as OpenEMR's own Rx (*patients / rx*).

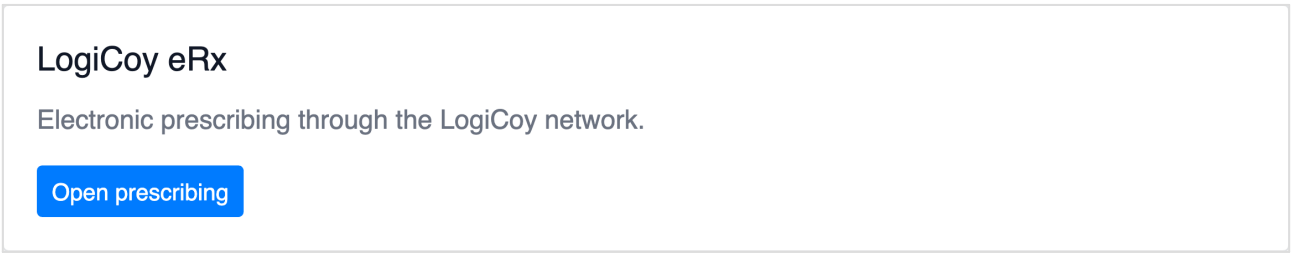


Figure 8. The LogiCoy eRx card on Patient Summary, with the Open prescribing button.

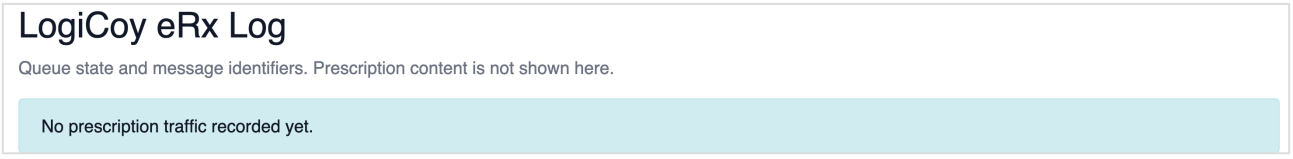


Figure 9. Modules → LogiCoy eRx Log, on a fresh install before any prescription has been sent. Prescription content is never shown here.

12. Troubleshooting

Symptom	Likely cause and fix
LogiCoy eRx does not appear in Manage Modules	The directory is not at `interface/modules/custom_modules/oe-module-logicoy-erx`, or is not readable by the web server. Re-run the installer, or check ownership and permissions (755 / 644).
Module vanished after a Docker update	It was installed into the container's writable layer. Reinstall, then bind-mount the module directory so it persists (Step 1).
Prescribing card missing from Patient Summary	Module not enabled, global switch off, or the user lacks the *patients / rx* permission. See Step 9.
Registration says a credential is missing for the facility	The facility selected at the top of the screen has no saved credential. Save one for that facility (Step 5) and retry.
Registration refused for an EPCS prescriber	One of DOB, DEA number, DEA expiry, DEA state or SSN last 4 is missing on the user record. The message names the field. Fill it in (Step 6) and retry.
"invalid_client" from the backend	The client ID and signing key do not match what LogiCoy enrolled. Confirm both came from the same onboarding pack; re-upload the key.
Prescriptions stay queued and never send	The cron worker is not running, is running as the wrong user, or the server cannot reach the backend URL over HTTPS. Check the LogiCoy eRx Log and run the worker by hand to see its output.
Prescribing worked, then failed after a container rebuild	The signing key was referenced by a path inside the container. Upload the key file instead (Step 5).
"This screen was open too long" on the credentials screen	Session token expired. Reload and retry. Nothing was saved or sent.

When contacting LogiCoy support, include the module version (shown in the page footer of this guide and in Manage Modules), your OpenEMR version, and the relevant entries from the LogiCoy eRx Log. Never send your private key.

13. Upgrading and uninstalling

Upgrading

Run the new installer exactly as in Step 1. It archives the existing module to the current directory first and leaves the module's tables, settings and credentials untouched. Afterwards open Manage Modules; if an upgrade is offered, apply it so any schema changes are installed. Registrations and cron jobs do not need to be redone.

Uninstalling

Disabling or unregistering the module in Manage Modules removes the prescribing card but deliberately leaves the module's tables in place. Prescription records are audited clinical data. Removing them is a manual step; ask LogiCoy support before dropping anything.

14. Setup checklist

Print this page and tick each item as you go.

Before installing

- ■ OpenEMR 7.0.0 or later, PHP 8.1 or later
- ■ Outbound HTTPS from the server to the LogiCoy backend confirmed
- ■ LogiCoy onboarding pack received: installer, base URL, client ID, registration UUID, key file
- ■ Facility record complete: address, phone, NPI
- ■ Prescriber user records complete: NPI, email, DEA (EPCS)

Installation

- ■ Installer run as root; module placed under custom_modules
- ■ Docker: module directory bind-mounted so it survives rebuilds
- ■ Manage Modules: Register, Install, Enable done

Configuration

- ■ Globals: Enable LogiCoy eRx turned on
- ■ Connection settings saved with the backend base URL
- ■ Practice credential saved: client ID, registration UUID, key uploaded
- ■ Each prescriber's LogiCoy eRx block completed under Administration, Users
- ■ Registered: Practice, Service location, each Prescriber
- ■ Cron line added for each facility; worker runs every 5 minutes

Verification

- [ ] LogiCoy eRx card visible on Patient Summary
- [ ] Test prescription on a test patient reflected into OpenEMR
- [ ] LogiCoy eRx Log shows the message as sent

LogiCoy eRx for OpenEMR is distributed under the GNU General Public License v3, the same license as OpenEMR. The LogiCoy prescribing service itself is provided under your service agreement with LogiCoy.