


Cloud-X Org projects

1. Build your first enterprise VM environment.

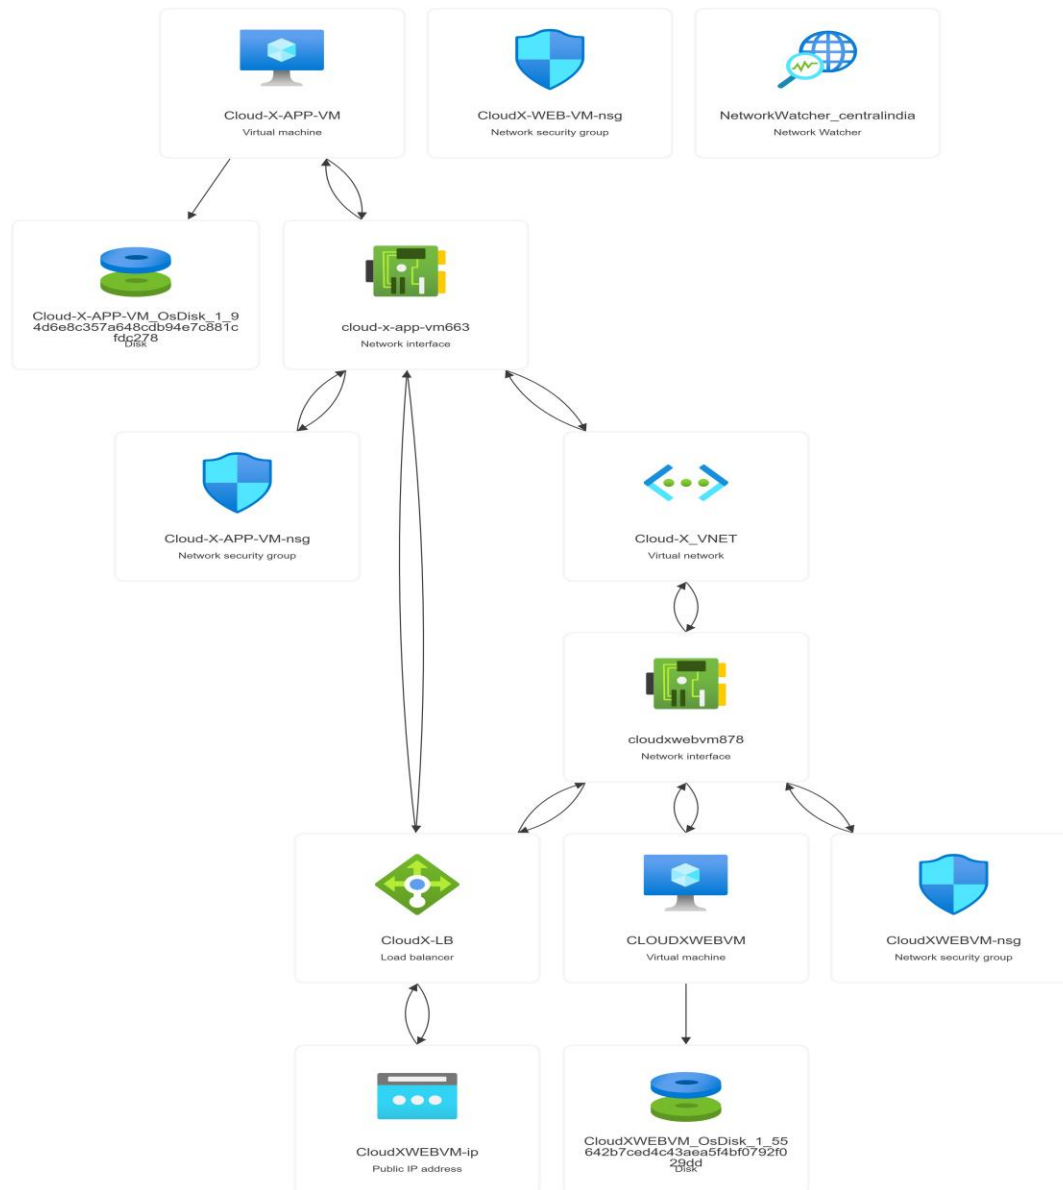

Step 1- Created Companies [Asia Pacific] Central India Primary resource group for objects.

Microsoft Azure

Search resources, services, and docs (G+)

Copilot

vishnulohar16@gmail.com
DEFAULT DIRECTORY (VISHNULOHAR16@...)

Dashboard > Resource Manager | Resource groups

Create a resource group

Basics Tags Review + create

Resource group - A container that holds related resources for an Azure solution. The resource group can include all the resources for the solution, or only those resources that you want to manage as a group. You decide how you want to allocate resources to resource groups based on what makes the most sense for your organization. [Learn more](#)

Subscription *

Resource group name *

Region *

Previous Next Review + create

Step 2- After creating the Resource group, I have created Cloud-X-VNET [10.0.0.0-10.0.7.255/21] with two subnets.

Microsoft Azure

Search resources, services, and docs (G+)

Copilot

vishnulohar16@gmail.com
DEFAULT DIRECTORY (VISHNULOHAR16@...)

Dashboard > Network foundation | Virtual networks

Create virtual network

Basics Security Address space Tags Review + create

10.0.0.0/21 [Delete address space](#)

Starting address Size
10.0.0.0 - 10.0.7.255 2,048 addresses

Subnets	IP address range	Size	NAT gateway
Subnet-WEB	10.0.0.0 - 10.0.0.255	/24 (256 addresses)	-
Subnet-APP	10.0.1.0 - 10.0.1.255	/24 (256 addresses)	-

Previous Next Review + create

<https://portal.azure.com/?ocid=81Dcmw83tn6nu-SFM-k-FAlaIOohChMIdK36n...>

1. Subnet-WEB [10.0.0.0 - 10.0.0.255/24]

Microsoft Azure

Search resources, services, and docs (G+)

Copilot

vishnulohar16
DEFAULT DIRECTOR

Create a resource

Home

Dashboard

All services

FAVORITES

App Services

Function App

Azure SQL Database

Azure Cosmos DB

Virtual machines

Load balancer

Storage accounts

Virtual network

Microsoft Entra ID

Microsoft Entra Domain Services

Monitor

Advisor

Edit subnet

Select an address space and configure your subnet. You can customize a default subnet or select from subnet templates if you plan to add select services later. [Learn more](#)

Subnet purpose ⓘ

Default

Name * ⓘ

Subnet-WEB

IPv4

Include an IPv4 address space

☒

IPv4 address range ⓘ

10.0.0.0/21

10.0.0.0 - 10.0.7.255

Starting address * ⓘ

10.0.0.0

▼ ▲

Size ⓘ

/24 (256 addresses)

▼

Subnet address range ⓘ

10.0.0.0 - 10.0.0.255

IPv6

Include an IPv6 address space

☐

This virtual network has no IPv6 address ranges.

Save

Cancel

2. Subnet-APP [10.0.1.0 - 10.0.1.255/24]

Microsoft Azure

Search resources, services, and docs (G+)

Copilot

vishnulohar16
DEFAULT DIRECTOR

Create a resource

Home

Dashboard

All services

FAVORITES

App Services

Function App

Azure SQL Database

Azure Cosmos DB

Virtual machines

Load balancer

Storage accounts

Virtual network

Microsoft Entra ID

Microsoft Entra Domain Services

Monitor

Advisor

Edit subnet

Select an address space and configure your subnet. You can customize a default subnet or select from subnet templates if you plan to add select services later. [Learn more](#)

Subnet purpose ⓘ

Default

Name * ⓘ

Subnet-APP

IPv4

Include an IPv4 address space

☒

IPv4 address range ⓘ

10.0.0.0/21

10.0.0.0 - 10.0.7.255

Starting address * ⓘ

10.0.1.0

▼ ▲

Size ⓘ

/24 (256 addresses)

▼

Subnet address range ⓘ

10.0.1.0 - 10.0.1.255

IPv6

Include an IPv6 address space

☐

This virtual network has no IPv6 address ranges.

Save

Cancel

Step 3- Created a Linux VM using free distro in Subnet-WEB app.

Dashboard > Compute infrastructure | Virtual machines

Create a virtual machine

Basics | Disks | Networking | Management | Monitoring | Advanced | Tags | **Review + create**

Availability zone	1
Security type	Trusted launch virtual machines
Enable secure boot	Yes
Enable vTPM	Yes
Integrity monitoring	No
Image	Rocky Linux 10
Size	Standard D2as_v6
VM architecture	x64
Authentication type	Password
Username	vishnu
Public inbound ports	SSH (22)
Azure Spot	Yes (Stop / Deallocate)
Azure Spot max price	-
Disks	
OS disk size	Image default
OS disk type	StandardSSD_LRS

of purchase, subscription type, usage costs, licensing and currency exchange rates. Total costs may include other resource costs, licensing and subscription implications. This feature may have limited or restricted functionality, but is made available on a preview basis for evaluation and feedback.

Give feedback about your estimate experience

> Basics	\$0.00
> Disks	\$1.32
> Networking	\$3.65
> Management	\$0.00
> Monitoring	\$0.00
> Advanced	\$0.00

Estimated monthly cost \$4.97
One or more costs did not load.
[View in Pricing Calculator](#)

Previous Next **Create**

[Give feedback](#)

Step 4- Started httpd service on Rocky Linux WEB VM and edited the html code for better webpage to access it via public ip over the internet.

```
vishnu@CloudX-WEB-VM:~$ systemctl status httpd
● httpd.service - The Apache HTTP Server
   Loaded: loaded (/usr/lib/systemd/system/httpd.service; disabled; preset: disabled)
   Active: active (running) since Fri 2026-10-02 10:27:33 UTC; 3min 32s ago
     Invocation: 84ffa4090eb741afbc71e6fc8f6ee23a
       Docs: man:httpd.service(8)
    Main PID: 5776 (httpd)
      Status: "Total requests: 4; Idle/Busy workers 100/0;Requests/sec: 0.0191; Bytes served/sec: 150 B/sec"
     Tasks: 177 (limit: 48309)
    Memory: 13.9M (peak: 14.3M)
       CPU: 193ms
    CGroup: /system.slice/httpd.service
            └─5776 /usr/sbin/httpd -DFOREGROUND
              └─5777 /usr/sbin/httpd -DFOREGROUND
                └─5778 /usr/sbin/httpd -DFOREGROUND
                  └─5779 /usr/sbin/httpd -DFOREGROUND
                    └─5861 /usr/sbin/httpd -DFOREGROUND

Oct 02 10:27:33 CloudX-WEB-VM systemd[1]: Starting httpd.service - The Apache HTTP Server...
Oct 02 10:27:33 CloudX-WEB-VM (httpd)[5776]: httpd.service: Referenced but unset environment variable evaluates to an empty string: OPTIONS
Oct 02 10:27:33 CloudX-WEB-VM systemd[1]: Started httpd.service - The Apache HTTP Server.
Oct 02 10:27:33 CloudX-WEB-VM httpd[5776]: Server configured, listening on: port 80
[vishnu@CloudX-WEB-VM ~]$
```

Step 5- Added Inbound Rule for HTTP port 80 for allowing the incoming traffic.

Dashboard > Compute infrastructure | Virtual machines > CloudX-WEB-VM

CloudX-WEB-VM | Network settings

Virtual machine

Search

Rules Collapse all

Network security group CloudX-WEB-VM-nsg (attached to networkInterface: cloudx-web-vm832)
Impacts 0 subnets, 1 network interfaces

Create port rule

Search rules

Source == all Destination == all Protocol == all Action == all Port == all

Prio...	Name	Port	Protocol	Source	Destination	Action
Inbound port rules (5)						
300	SSH	22	TCP	Any	Any	Allow
310	HTTP-80	80	TCP	Any	Any	Allow
65000	AllowVnetInBound	Any	Any	VirtualNetwork	VirtualNetwork	Allow
65001	AllowAzureLoadBalancerInB...	Any	Any	AzureLoadBalancer	Any	Allow
65500	DenyAllInBound	Any	Any	Any	Any	Deny
Outbound port rules (3)						
65000	AllowVnetOutBound	Any	Any	VirtualNetwork	VirtualNetwork	Allow
65001	AllowInternetOutBound	Any	Any	Any	Internet	Allow

Step 6- Website is now accessible over the internet.

← → ↺ Not Secure http://20.193.139.175 67%

Cloud-X Services About Contact

Next-Gen Cloud Infrastructure

Architecting, securing, and optimizing your multi-cloud environment across AWS and Microsoft Azure.

AWS Infrastructure

Maximize scalability and global reach with our certified Amazon Web Services solutions.

- EC2 & Auto-Scaling Architecture
- VPC & Advanced Network Security
- Serverless Solutions (Lambda & API Gateway)
- Cost Optimization & Well-Architected Reviews

Explore AWS Setup


Azure Infrastructure

Seamlessly integrate hybrid cloud setups and enterprise systems with Microsoft Azure.


- Azure Virtual Machines & Scale Sets
- Active Directory (Entra ID) & IAM Integration
- Hybrid Cloud & Azure Arc Deployments
- Azure DevOps Pipelines & CI/CD

Explore Azure Setup


Step 7- Created one more Windows VM under CloudX-APP-Subnet and started IIS services on it.

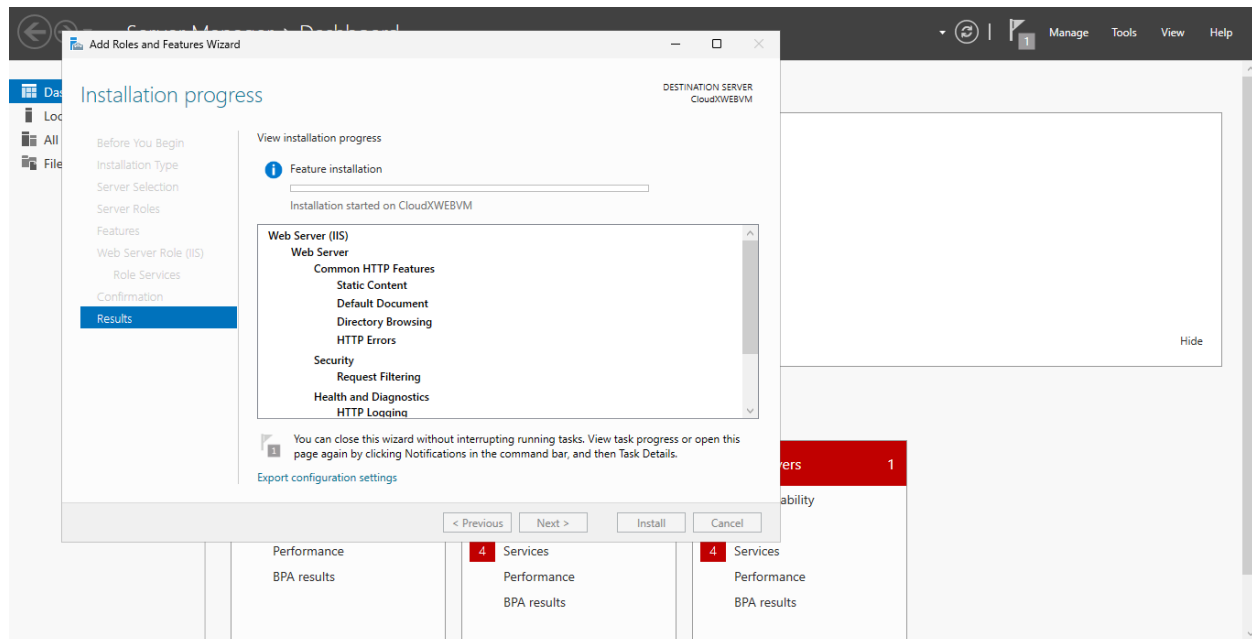


Step 8- Added http 80 Port into Inbound rule to access traffic from internet to Windows VM.

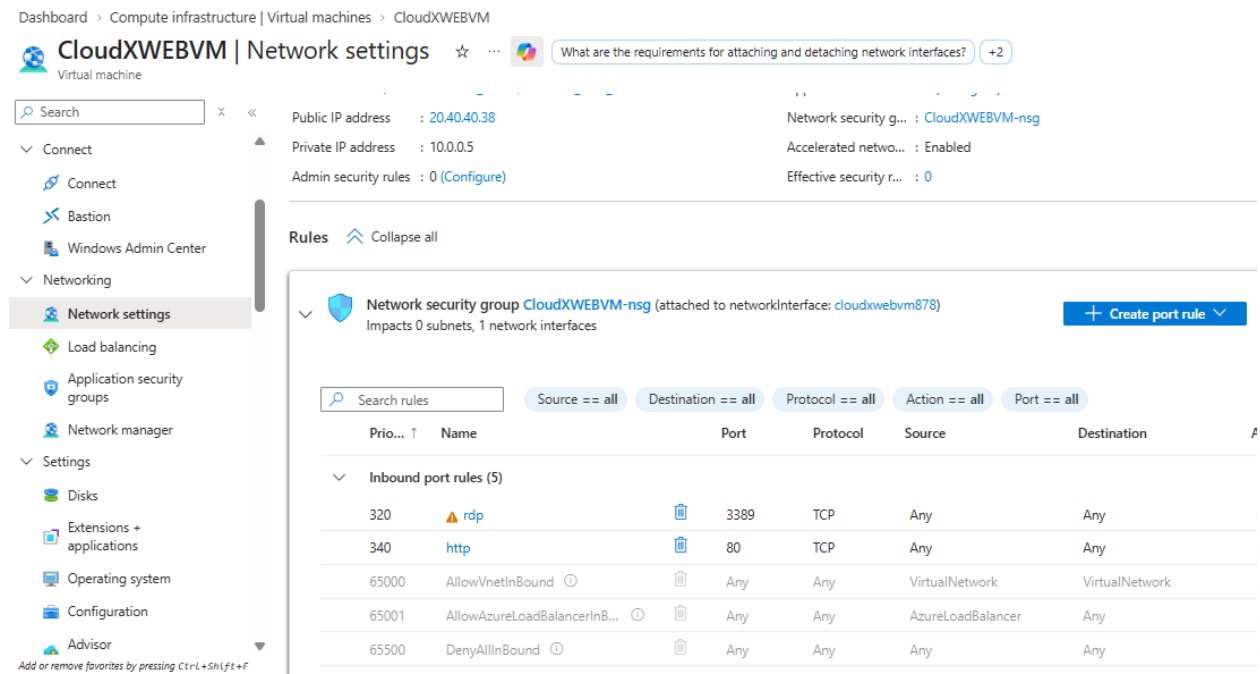

Step 9- Access it from the internet using Public IP.

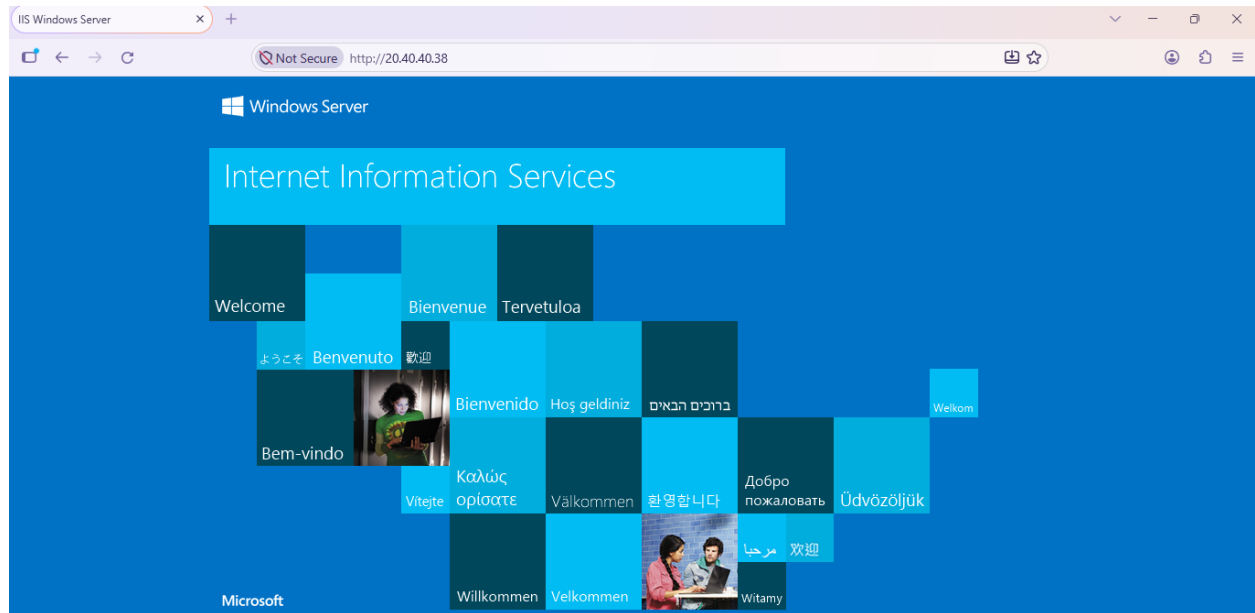

Step 10- Created Public Load balancer and added both of the instances in the backend with one Public IP and accessing both the VM with public IP with assigned ports.

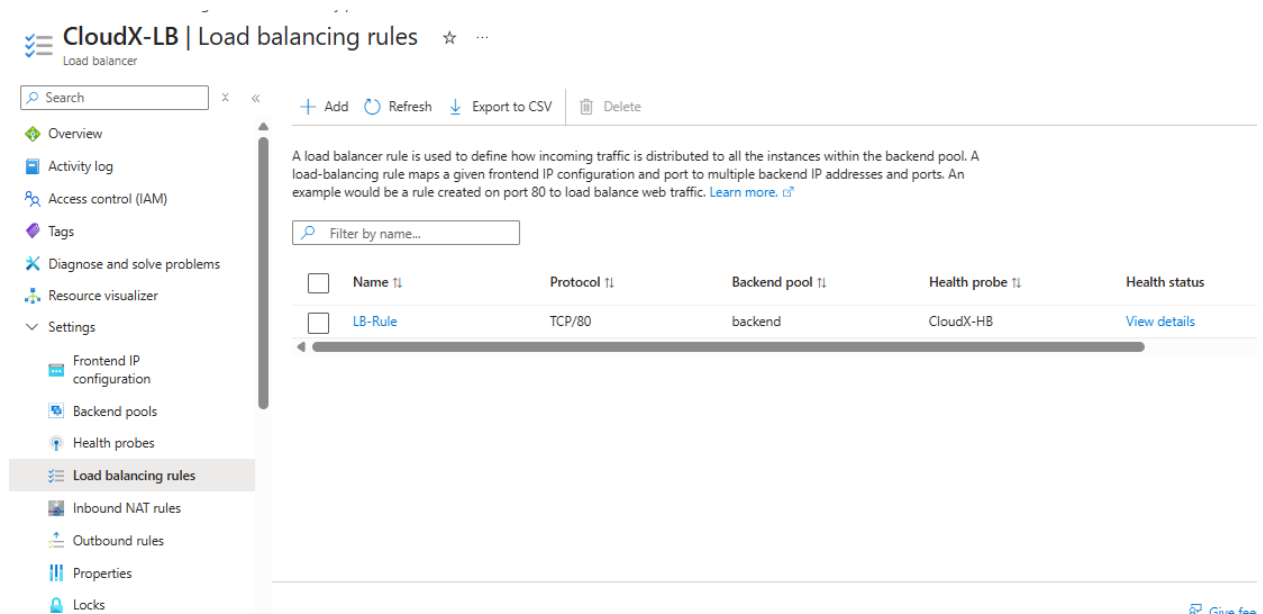

CloudX-LB | Inbound NAT rules

Load balancer

Search

+ Add Delete Refresh

Overview

Activity log

Access control (IAM)

Tags

Diagnose and solve problems

Resource visualizer

Settings

Frontend IP configuration

Backend pools

Health probes

Load balancing rules

Inbound NAT rules

An inbound NAT rule is used for port forwarding. Port forwarding lets you connect to virtual machines by using the load balancer frontend IP address and port number. The load balancer will receive the traffic on a port, and based on the inbound NAT rule, forwards the traffic to a designated virtual machine on a specific backend port. [Learn more.](#)

Type to start filtering ...

☐	Name	Frontend IP	Frontend port/range	Target	Service	
☐	CloudX-SSH	20.40.40.38	50222	Cloud-X-APP-VM	SSH (TCP/22)	
☐	CloudX-Inbound-rfp	20.40.40.38	53389	CloudXWEBVM	RDP (TCP/3389)	

HTTP Server Test Page powered by: x

Not Secure http://20.40.40.38

HTTP Server Test Page

This page is used to test the proper operation of an HTTP server after it has been installed on a Rocky Linux system. If you can read this page, it means that the software is working correctly.

Just visiting?

This website you are visiting is either experiencing problems or could be going through maintenance.

If you would like the let the administrators of this website know that you've seen this page instead of the page you've expected, you should send them an email. In general, mail sent to the name "webmaster" and directed to the website's domain should reach the appropriate person.

The most common email address to send to is:
"webmaster@example.com"

Note:

The Rocky Linux distribution is a stable and reproducible platform based on the sources of Red Hat Enterprise Linux (RHEL). With this in mind, please

IIS Windows Server

Not Secure http://20.40.40.38

Windows Server

Internet Information Services

Welcome Bienvenue Tervetuloa

ようこそ Benvenuto 歓迎

Bem-vindo

Bienvenido Hoş geldiniz ברוכים הבאים

Vitajte Καλώς ορίσαστε Välkommen 환영합니다 Добро пожаловать

Microsoft

Willkommen Velkommen

مرحبا 欢迎 Witamy

Load balancer CloudX-LB

