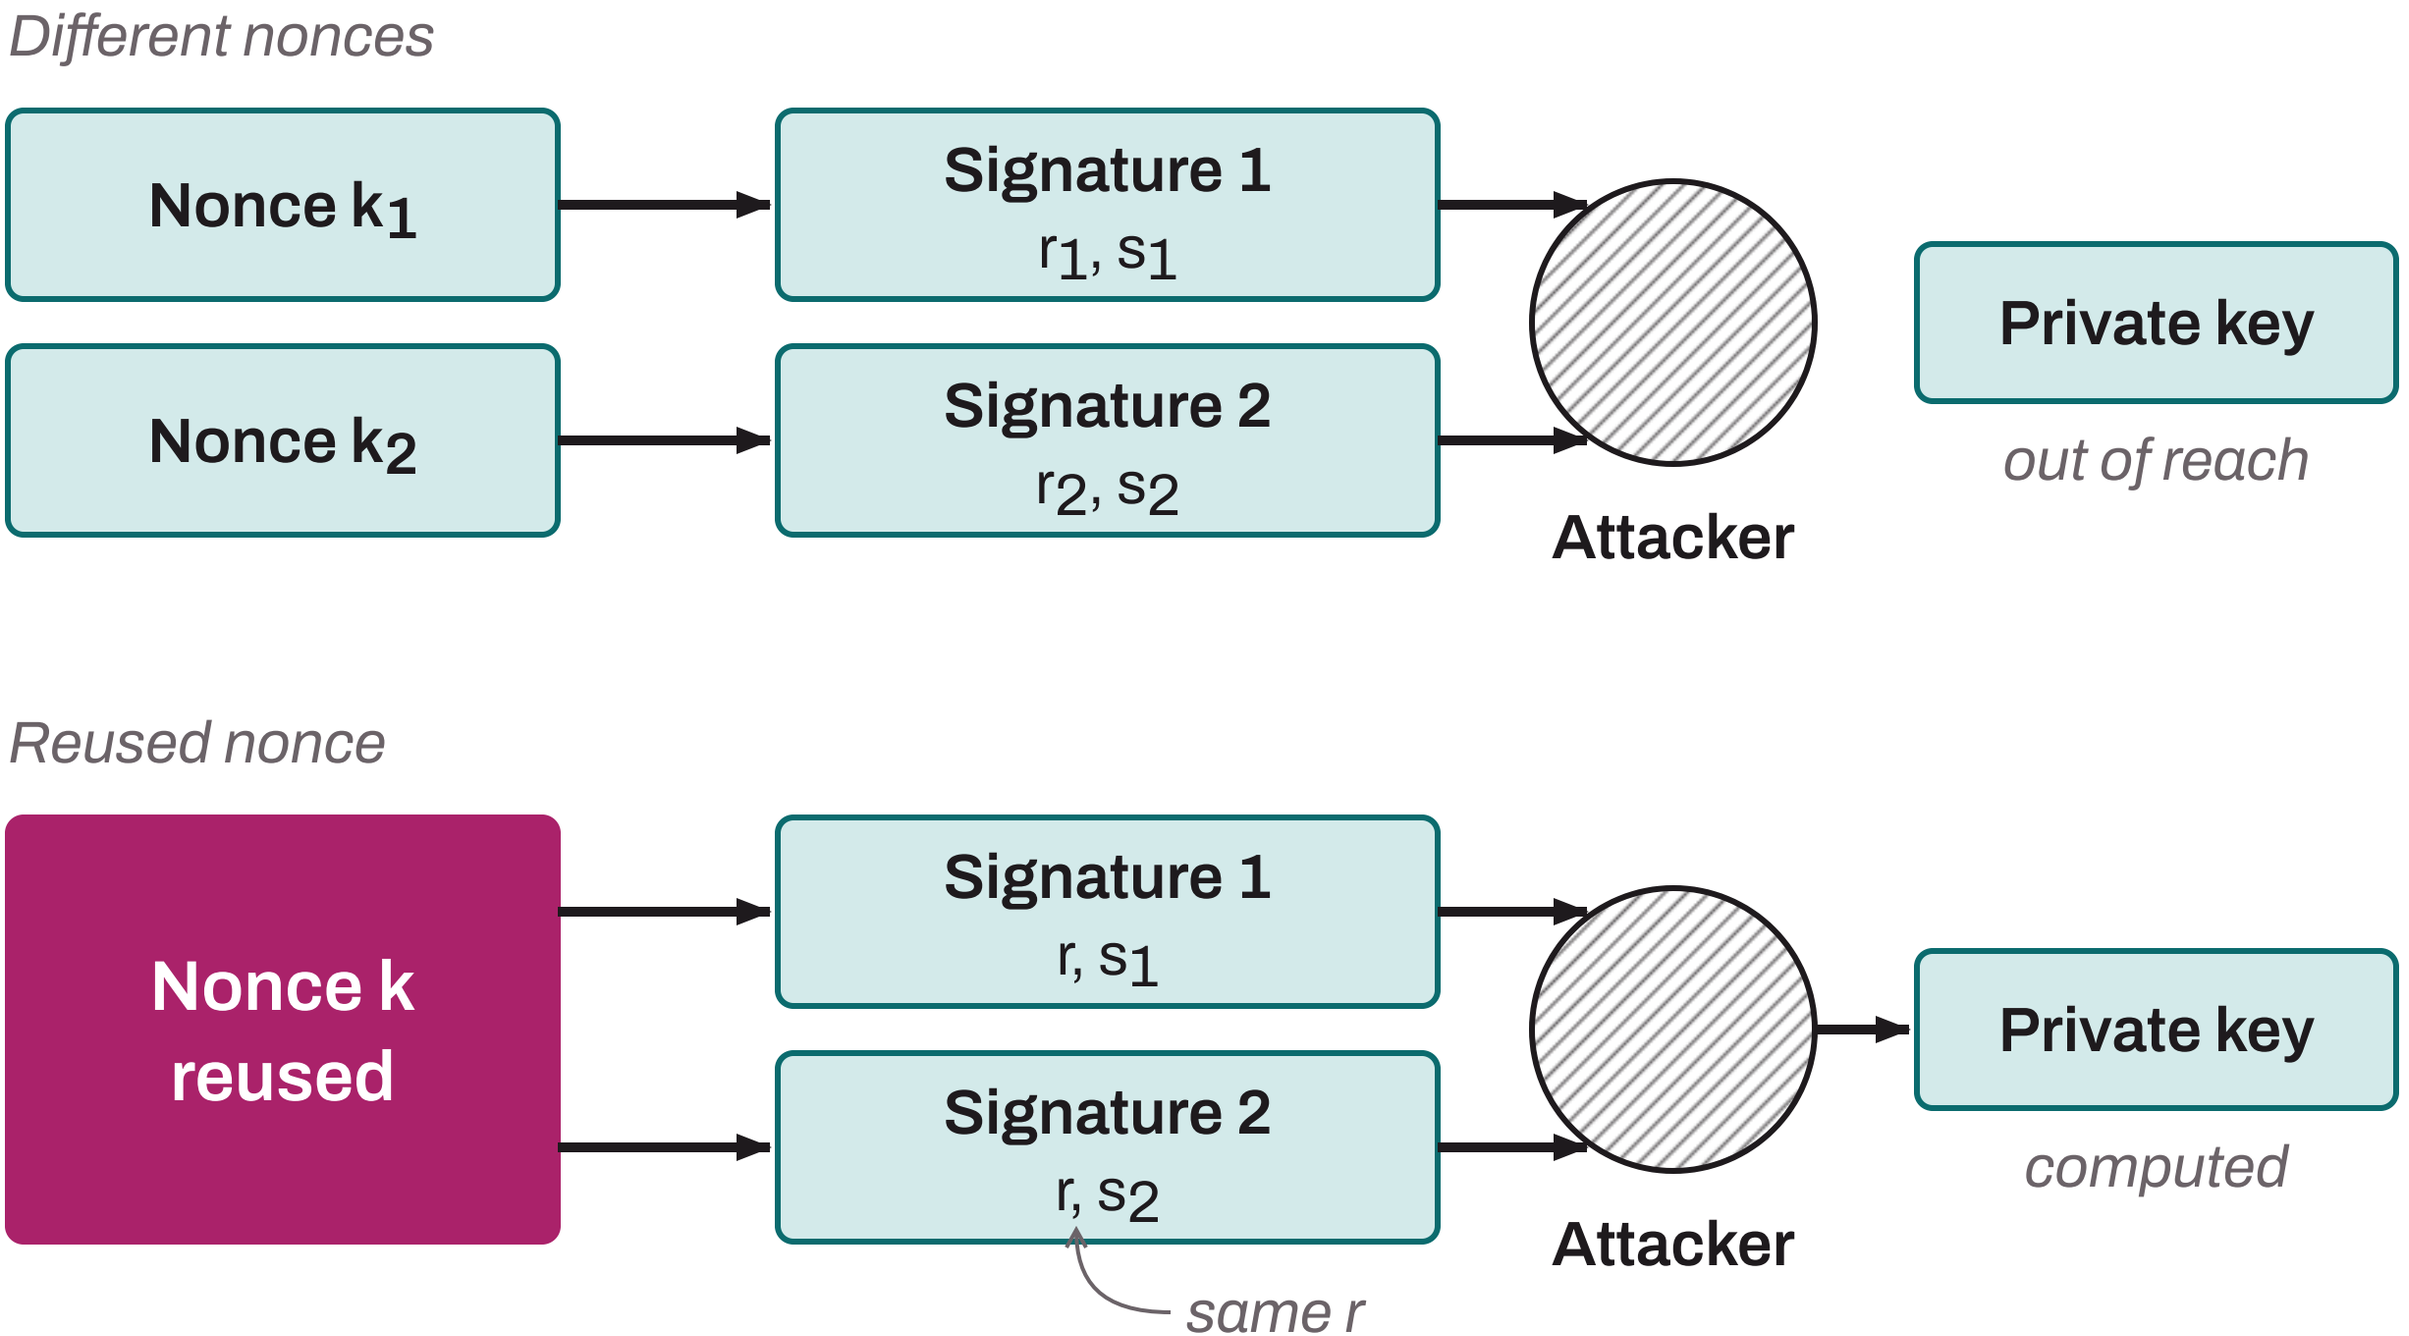

Different nonces
Nonce k_1
Nonce k_2
Signature 1
r_1, s_1
Signature 2
r_2, s_2
Attacker
Private key
out of reach
Reused nonce
Nonce k reused
Signature 1
r, s_1
Signature 2
r, s_2
same r
Attacker
Private key
computed