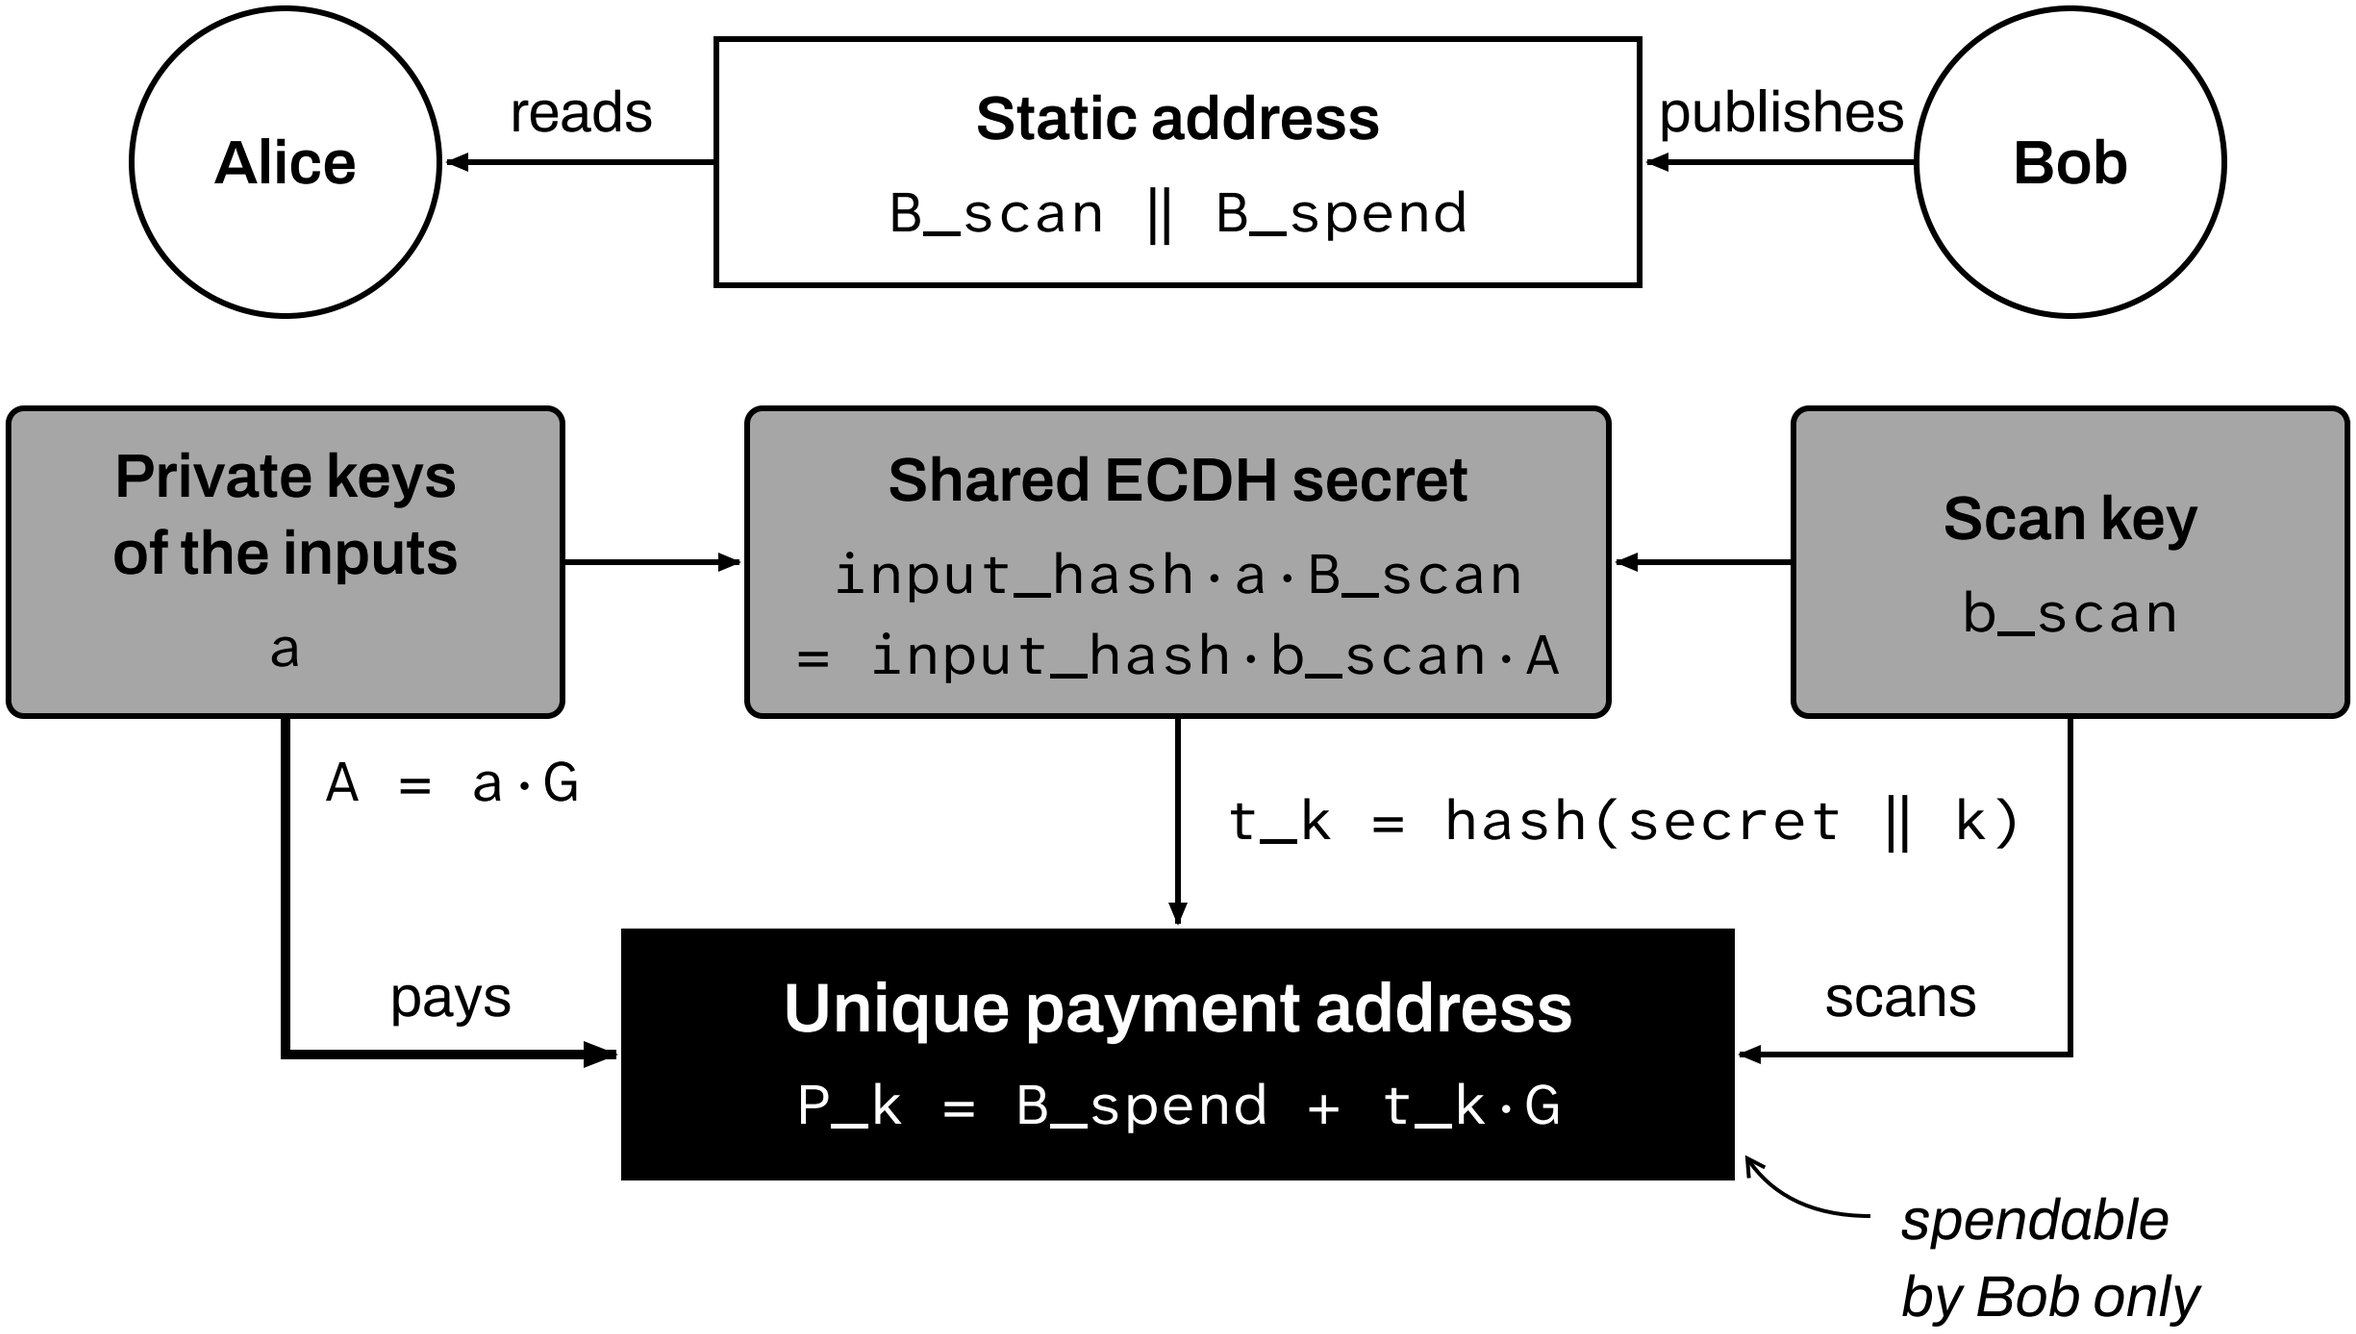
Alice
reads
Static address
B_scan || B_spend
publishes
Bob
Private keys of the inputs
a
Shared ECDH secret
input_hash·a·B_scan
= input_hash·b_scan·A
Scan key
b_scan
A = a·G
t_k = hash(secret || k)
pays
Unique payment address
P_k = B_spend + t_k·G
scans
spendable by Bob only