

Milestone 3 Report: Rendering & Signal Processing

Procedural Terrain Generator

This stage aims to enable the realistic image formation of the procedural terrain generator. The aim is to improve the visualization aspect of generated terrain by applying lighting calculations, surface representation, and sampling methods.

The rendering pipeline in this project involves combining procedural terrain generation with height-based material assignment and Phong lighting, as well as Super Sampling-based antialiasing, to produce a realistic terrain image.

Group A members

SCT 221-C004-0046/2024- Nasteha Ahmed

SCT221-C004-0581/2024- Lorene Wambui

SCT221-C004-0561/2024- Reyhana Abdi

SCT221-C004-0093/2024- Robert Bashir

SCT221-C004-0263/2024- Cecilia Wambui

1. Shading model

- lighting.py → Phong lighting
- renderer.py → applies lighting to terrain

Phong Illumination Model

The terrain renderer applies the Phong shading model to simulate the interaction between light and the terrain surface. Phong shading was selected due to its balance between realism and performance.

Ambient Component

Ambient lighting is used to simulate global illumination and prevents completely dark areas.

Diffuse Component

Diffuse lighting ensures that light intensity is proportional to the angle between the terrain surface normal and the light direction. Surfaces facing the light are illuminated more.

Specular Component

Specular lighting is responsible for sharp, bright reflections on terrain surfaces and contributes to realistic texture detail.

2. Texture or Surface representation

- material.py

Height-Based Procedural Texturing

The terrain utilizes a procedural height-based surface representation without using external image textures. Instead, terrain height is used to assign different materials. This allows for automatic generation of natural terrain landscapes.

This approach allows automatic generation of realistic terrain environments. Low areas naturally become water regions, while higher elevations represent rocky and snowy mountain regions.

Height	Surface
Below -2	Deep water
-2 - 0	Shallow water
0 - 3	Grass
3 - 8	Dirt
8 – 13	Rock
Above 13	Snow

3. Sampling and Antialiasing Method

- terrain_generator.py


Super sampling is used as an antialiasing technique to improve image quality. The method involves generating terrain at a higher resolution and then down sampling it to the final desired resolution.

1. Higher resolution terrain data is generated.
2. Multiple terrain points are sampled for each final terrain point.
3. Nearby samples are averaged when down sampling.

Super sampling minimizes aliasing effects such as jagged edges and blocky transitions, resulting in a smoother and more consistent terrain appearance.

Source code

<https://github.com/Lokaalee/Procedural-Terrain-Generator>

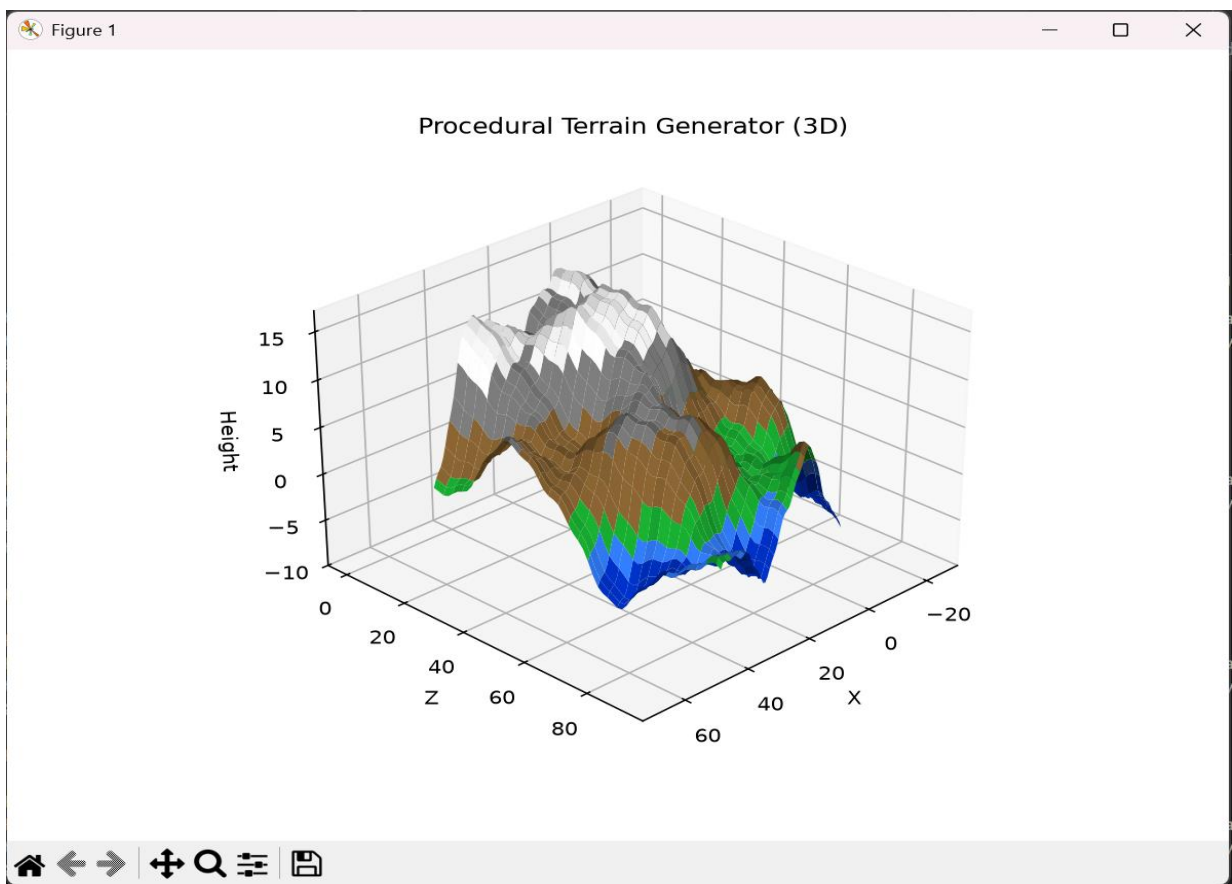

4. Artifact Analysis

Aliasing

Aliasing arises from the discrete representation of continuous terrain features using an inadequate number of samples, resulting in stair cased edges and abrupt surface changes. Super sampling reduces aliasing by oversampling the terrain and then averaging samples to achieve a smoother result.

- **Low resolution sampling**
60 × 60 terrain samples
↓
Possible aliasing
- **Super sampling**
120 × 120 terrain samples
↓
Average neighbouring samples
↓
60 × 60 final terrain


Noise

Uncontrolled and irregular variations are considered noise. The generator reduces noise by using deterministic procedural functions and a fixed random seed.

random.seed(42)

Distortion


Distortion happens when the transformation from 3D terrain coordinates to 2D image causes a change in the shape of features. Consistent scaling and rotation transformations before visualization help preserve the spatial relationships

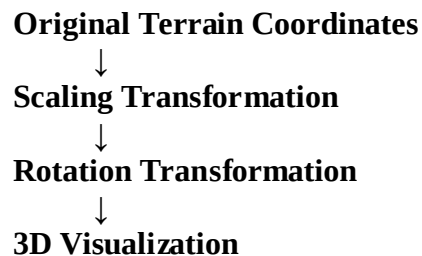

5. Comparison of at least two rendering strategies


Strategy 1: Basic Height-Based Rendering

This method directly assigns colours based on height values without incorporating any lighting calculations.

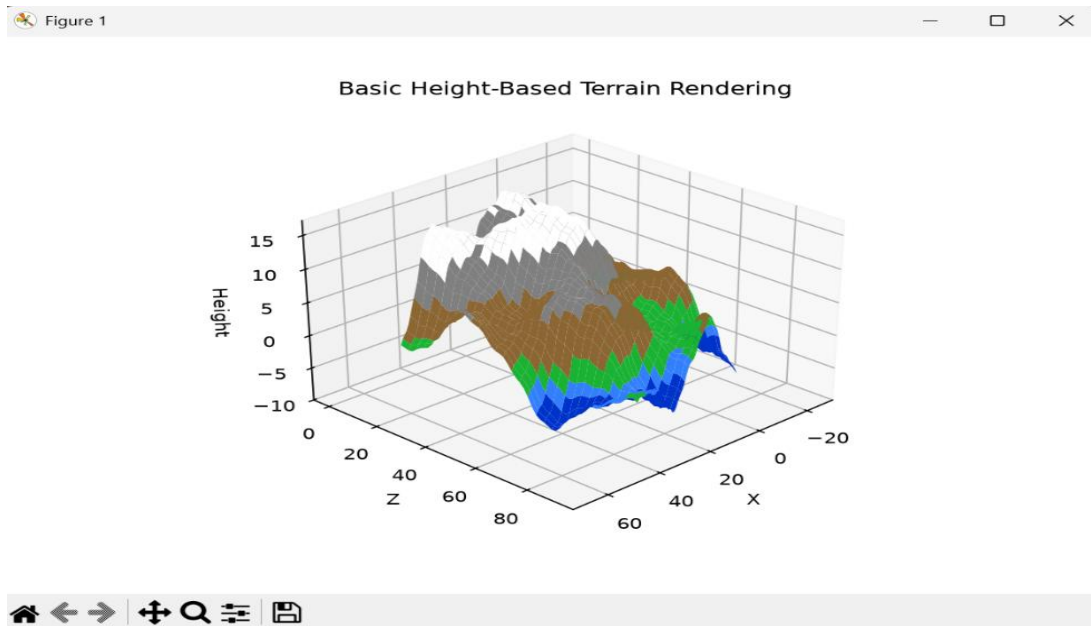

Strategy 2: Phong Shading with Super sampling

This project's chosen method incorporates material assignment, Phong lighting, and super sampling to produce more realistic results.

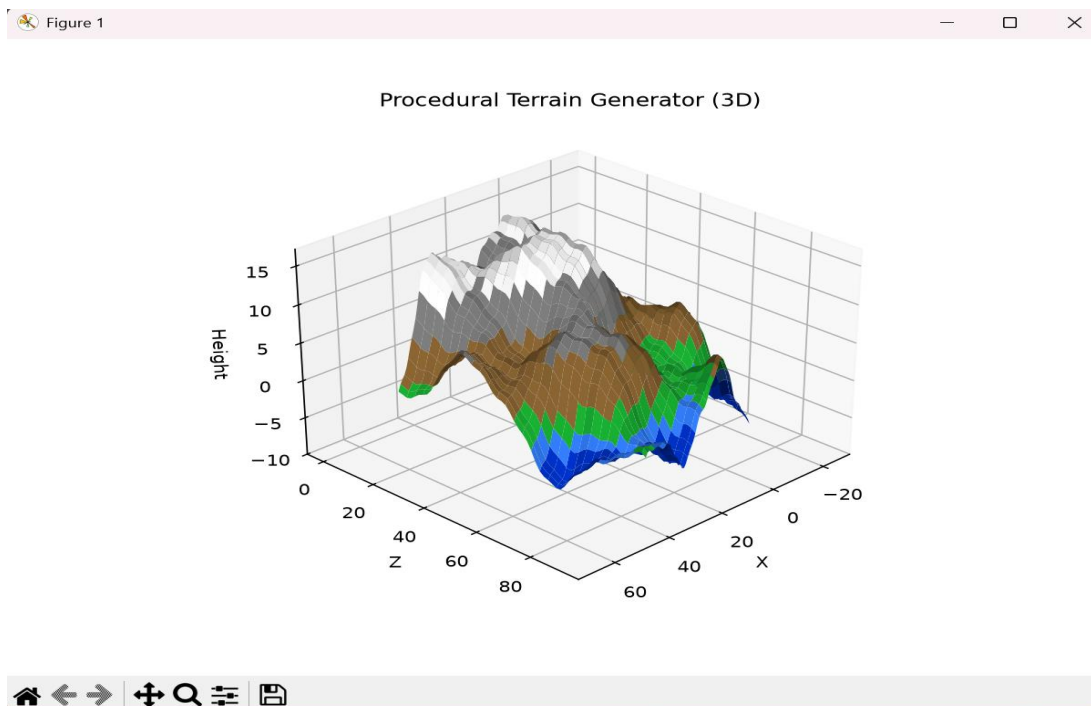

Feature	Basic Height-Based Rendering	Phong Shading + Super sampling Rendering
Lighting	No lighting model is applied. Terrain colours are displayed directly based on height values.	Uses the Phong illumination model with ambient, diffuse and specular lighting components to simulate light interaction.
Surface Representation	Uses simple colour mapping where terrain elevation directly determines the displayed colour.	Uses procedural height-based materials where different elevation ranges represent water, grass, dirt, rock and snow.
Realism	Low realism because terrain surfaces appear flat and do not respond to lighting conditions.	Higher realism due to realistic shading, depth perception and varied surface materials.
Aliasing	More visible because terrain is rendered directly from sampled height values without additional sampling techniques.	Reduced through super sampling, where higher-resolution terrain samples are averaged before final rendering.
Computation Cost	Lower computational cost due to fewer calculations and no lighting processing.	Higher computational cost due to normal calculations, lighting calculations and additional sampling operations.
Visual Quality	Basic visualization suitable for displaying terrain structure but lacks realistic appearance.	Improved visual quality with smoother surfaces, better lighting effects and more realistic terrain appearance.