

Ex. No.: 3

Date:

AIM

To perform Data Manipulation Language (DML) commands such as INSERT and SELECT on the Hospital Management System tables.

DESCRIPTION

Data Manipulation Language (DML) statements are used to insert, retrieve, update and delete data from database tables.

DML Commands

- **INSERT** – Used to insert records into a table.
- **SELECT** – Used to retrieve records from a table.

SYNTAX

INSERT Command

HOSTEL_ROOMS

INSERT INTO HOSTEL_ROOMS

(RoomID, RoomNumber, Gender, DOB, MobileNo, RoomStatus)

VALUES

(101,'Rahul','M','2002-05-10',9876543210,'Chennai');

HOSTEL_STUDENT

INSERT INTO HOSTEL_STUDENT

(StudentID, StudentName, Gender, Email, MobileNo, RoomID)

VALUES

(201,'Dr. Kumar','M','Cardiology',9876501111,10);

HOSTEL_WARDEN

INSERT INTO HOSTEL_WARDEN

(WardenID, WardenName, DeptHead)

VALUES

(1,'Cardiology','Dr. Kumar');

HOSTEL_BLOCK

INSERT INTO HOSTEL_BLOCK

(BlockID, RoomID, StudentID, FloorCount, BlockName, TotalRooms)

VALUES

(1,101,201,'2026-08-05','10:00:00','21');

SELECT Command

Display all records from HOSTEL_ROOMS

SELECT * FROM HOSTEL_ROOMS;

Display all records from HOSTEL_STUDENT

SELECT * FROM HOSTEL_STUDENT;

Display all records from HOSTEL_WARDEN

SELECT * FROM HOSTEL_WARDEN;

Display all records from HOSTEL_BLOCK

SELECT * FROM HOSTEL_BLOCK;

Tables Used

HOSTEL_ROOMS

Field Name	Data Type
RoomID	INT
RoomNumber	VARCHAR(30)
Gender	CHAR(1)
DOB	DATE
MobileNo	BIGINT
RoomStatus	VARCHAR(30)

HOSTEL_STUDENT

Field Name	Data Type
StudentID	INT
StudentName	VARCHAR(30)
Gender	CHAR(1)
Email	VARCHAR(30)
MobileNo	BIGINT
RoomID	INT

HOSTEL_WARDEN

Field Name	Data Type
WardenID	INT
WardenName	VARCHAR(30)
DeptHead	VARCHAR(30)

HOSTEL_BLOCK

Field Name	Data Type
BlockID	INT
RoomID	INT
StudentID	INT
FloorCount	DATE
BlockName	TIME
TotalRooms	VARCHAR(10)

Questions

1. Populate all the Hospital Management System tables with your own data.

- HOSTEL_ROOMS
- HOSTEL_STUDENT
- HOSTEL_WARDEN
- HOSTEL_BLOCK

Insert Records into HOSTEL_ROOMS

INSERT INTO HOSTEL_ROOMS

VALUES

(101,'Rahul','M','2002-05-10',9876543210,'Chennai'),
(102,'Anitha','F','2001-11-15',9876543211,'Coimbatore'),
(103,'Karthik','M','2003-08-20',9876543212,'Madurai');

Insert Records into HOSTEL_STUDENT

INSERT INTO HOSTEL_STUDENT

VALUES

(201,'Dr. Kumar','M','Cardiology',9876501111,10),
(202,'Dr. Priya','F','Neurology',9876502222,8),
(203,'Dr. Arun','M','Orthopedics',9876503333,12);

Insert Records into HOSTEL_WARDEN

INSERT INTO HOSTEL_WARDEN

VALUES


(1,'Cardiology','Dr. Kumar'),
(2,'Neurology','Dr. Priya'),
(3,'Orthopedics','Dr. Arun');

Insert Records into HOSTEL_BLOCK

INSERT INTO HOSTEL_BLOCK

VALUES

```
(1,101,201,'2026-08-05','10:00:00','21'),
(2,102,202,'2026-08-06','11:30:00','22'),
(3,103,203,'2026-08-07','09:00:00','23');
```

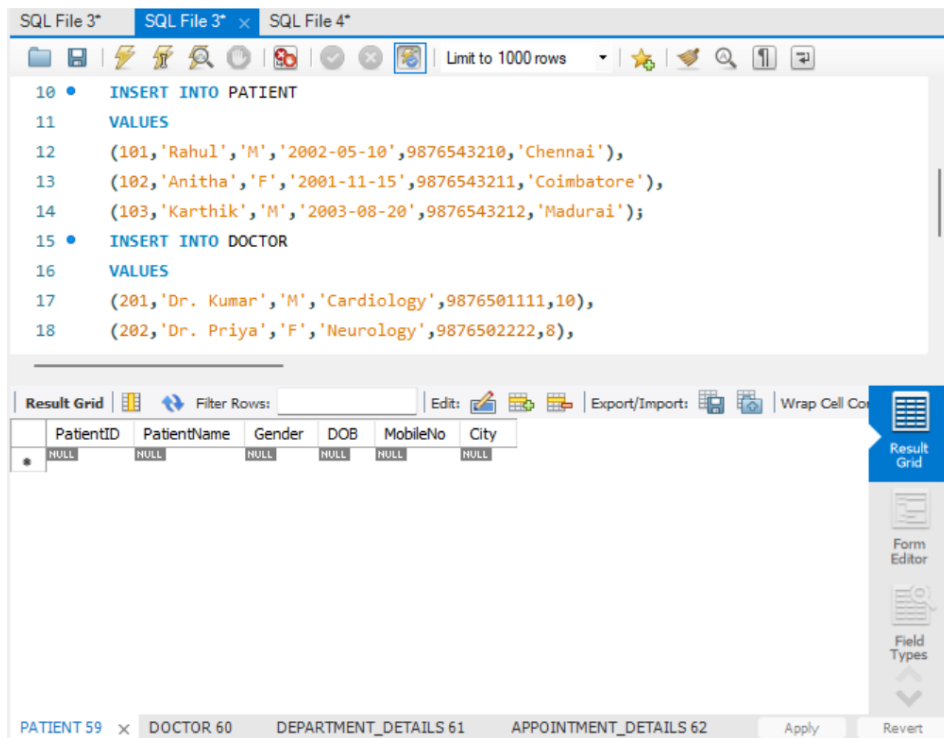

2. View all the records from all the Hospital Management System tables.

- HOSTEL_ROOMS
 - HOSTEL_STUDENT
 - HOSTEL_WARDEN
 - HOSTEL_BLOCK
-
- View Records from HOSTEL_ROOMS
 - SELECT * FROM HOSTEL_ROOMS;
 - View Records from HOSTEL_STUDENT
 - SELECT * FROM HOSTEL_STUDENT;

- View Records from HOSTEL_WARDEN
- SELECT * FROM HOSTEL_WARDEN;
- View Records from HOSTEL_BLOCK
- SELECT * FROM HOSTEL_BLOCK;

SQL File 3* SQL File 3* SQL File 4* SQL File 5* SQL File 6* SQL File 7* x

Limit to 1000 rows

```

23 ('B03','C Block',30,2,'W103');
24 • II Execute the selected portion of the script or everything, if there is no selection
25 (StudentID,StudentName,Gender,DOB,MobileNo,RoomID,Email)
26 VALUES
27 (201,'Lokesh','M','2005-03-15',9876543210,101,'lokesh@gmail.com'),
28 (202,'Rahul','M','2004-07-10',9876543211,102,'rahul@gmail.com'),
29 (203,'Priya','F','2005-01-25',9876543212,103,'priya@gmail.com');
30 • SELECT * FROM Hostel_Rooms;
31

```

Result Grid

RoomID	RoomNumber	BlockName	FloorNo	RoomType	Capacity	OccupiedBeds	RentPerMonth	RoomStatus
101	A101	A Block	1	Single	1	1	3500.00	Occupied
102	A102	A Block	1	Double	2	1	4500.00	Available
103	B201	B Block	2	Triple	3	2	5500.00	Occupied
NULL	NULL	NULL	NULL	NULL	NULL	NULL	NULL	NULL

Hostel_Rooms27 x Apply Revert

SQL File 3* SQL File 3* SQL File 4* SQL File 5* SQL File 6* SQL File 7* x

Limit to 1000 rows

```

23 • Execute the selected portion of the script or everything, if there is no selection
24 • INSERT INTO Hostel_Student
25 (StudentID,StudentName,Gender,DOB,MobileNo,RoomID,Email)
26 VALUES
27 (201,'Lokesh','M','2005-03-15',9876543210,101,'lokesh@gmail.com'),
28 (202,'Rahul','M','2004-07-10',9876543211,102,'rahul@gmail.com'),
29 (203,'Priya','F','2005-01-25',9876543212,103,'priya@gmail.com');
30 • SELECT * FROM Hostel_Rooms;
31 • SELECT * FROM Hostel_Student;

```

Result Grid

StudentID	StudentName	Gender	DOB	MobileNo	RoomID	Email
201	Lokesh	M	2005-03-15	9876543210	101	lokesh@gmail.com
202	Rahul	M	2004-07-10	9876543211	102	rahul@gmail.com
203	Priya	F	2005-01-25	9876543212	103	priya@gmail.com
NULL	NULL	NULL	NULL	NULL	NULL	NULL

Hostel_Rooms28 Hostel_Student 29 x Apply Revert

SQL File 3* SQL File 3* SQL File 4* SQL File 5* SQL File 6* SQL File 7* x

Limit to 1000 rows

```

25 (StudentID,StudentName,Gender,DOB,MobileNo,RoomID,Email)
26 VALUES
27 (201,'Lokesh','M','2005-03-15',9876543210,101,'lokes@gmail.com'),
28 (202,'Rahul','M','2004-07-10',9876543211,102,'rahul@gmail.com'),
29 (203,'Priya','F','2005-01-25',9876543212,103,'priya@gmail.com');
30 • SELECT * FROM Hostel_Rooms;
31 • SELECT * FROM Hostel_Student;
32 • SELECT * FROM Hostel_Warden;
33

```

Result Grid

	WardenID	WardenName	Gender	MobileNo	Experience
▶	W101	Mr. Ravi	M	9876501111	10
	W102	Mrs. Priya	F	9876502222	8
	W103	Mr. Suresh	M	9876503333	12
*	NULL	NULL	NULL	NULL	NULL

Hostel_Rooms30 Hostel_Student 31 Hostel_Warden 32 x Apply Revert

SQL File 3* SQL File 3* SQL File 4* SQL File 5* SQL File 6* SQL File 7* x

Limit to 1000 rows

```

25 (StudentID,StudentName,Gender,DOB,MobileNo,RoomID,Email)
26 VALUES
27 (201,'Lokesh','M','2005-03-15',9876543210,101,'lokes@gmail.com'),
28 (202,'Rahul','M','2004-07-10',9876543211,102,'rahul@gmail.com'),
29 (203,'Priya','F','2005-01-25',9876543212,103,'priya@gmail.com');
30 • SELECT * FROM Hostel_Rooms;
31 • SELECT * FROM Hostel_Student;
32 • SELECT * FROM Hostel_Warden;
33 • SELECT * FROM Hostel_Block;

```

Result Grid

	BlockID	BlockName	TotalRooms	FloorCount	WardenID
▶	B01	A Block	40	2	W101
	B02	B Block	35	3	W102
	B03	C Block	30	2	W103
*	NULL	NULL	NULL	NULL	NULL

Hostel_Rooms33 Hostel_Student 34 Hostel_Warden 35 Hostel_Block36 x Apply Revert