

OUTPUT:

```
-----
Before Suite
Before Test
Before Class
Before Each Test Method
Executing Test Case 1
After Each Test Method
Before Each Test Method
Executing Test Case 2
After Each Test Method
After Class
After Test
PASSED: com.bca.testcase.testCase2
PASSED: com.bca.testcase.testCase1

=====
    Default test
    Tests run: 2, Failures: 0, Skips: 0
=====


After Suite

=====
Default suite
Total tests run: 2, Passes: 2, Failures: 0, Skips: 0
=====
```

Result:

TestNG lifecycle annotations executed in correct order, confirming how the testing framework handles setup and teardown for test execution.

OUTPUT :

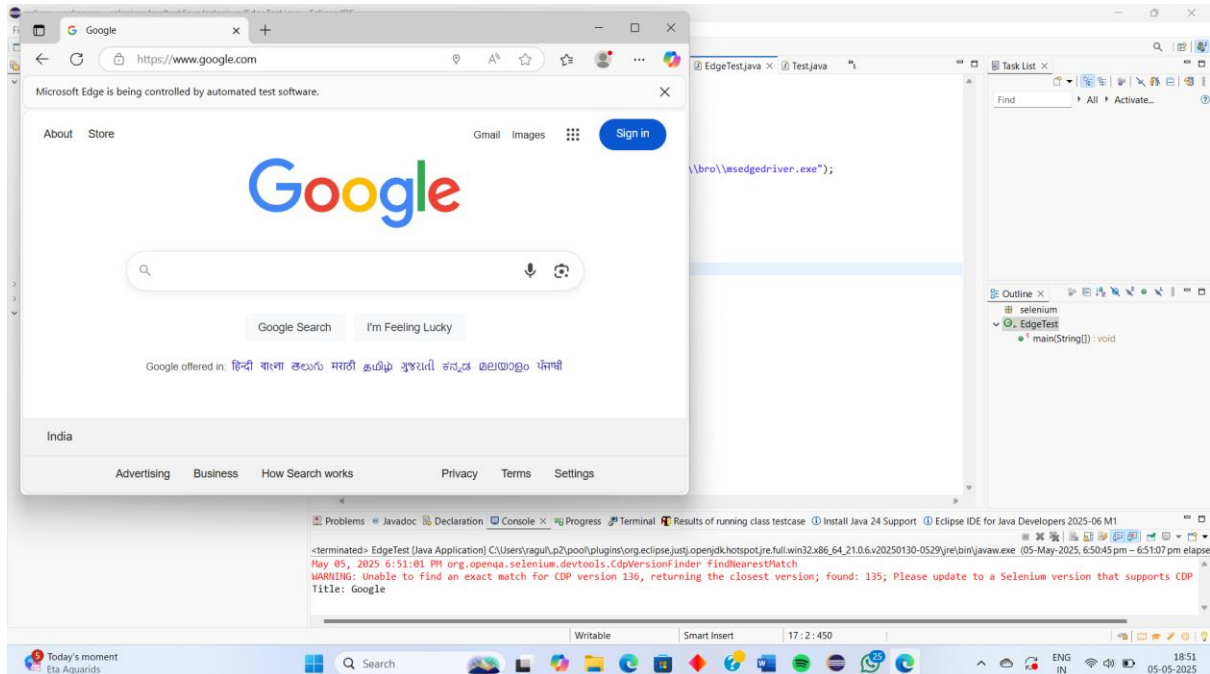

Result:

Chrome browser launched successfully and title was printed using Selenium WebDriver.

OUTPUT :

```
Login Test
Logout Test
PASSED: com.bca.EX1.loginTest
PASSED: com.bca.EX1.logoutTest
```


```
=====
    Default test
    Tests run: 2, Failures: 0, Skips: 0
=====
```

```
=====
Default suite
Total tests run: 2, Passes: 2, Failures: 0, Skips: 0
=====
```

Result:

loginTest runs before logoutTest. You can run by groups via XML.

OUTPUT :

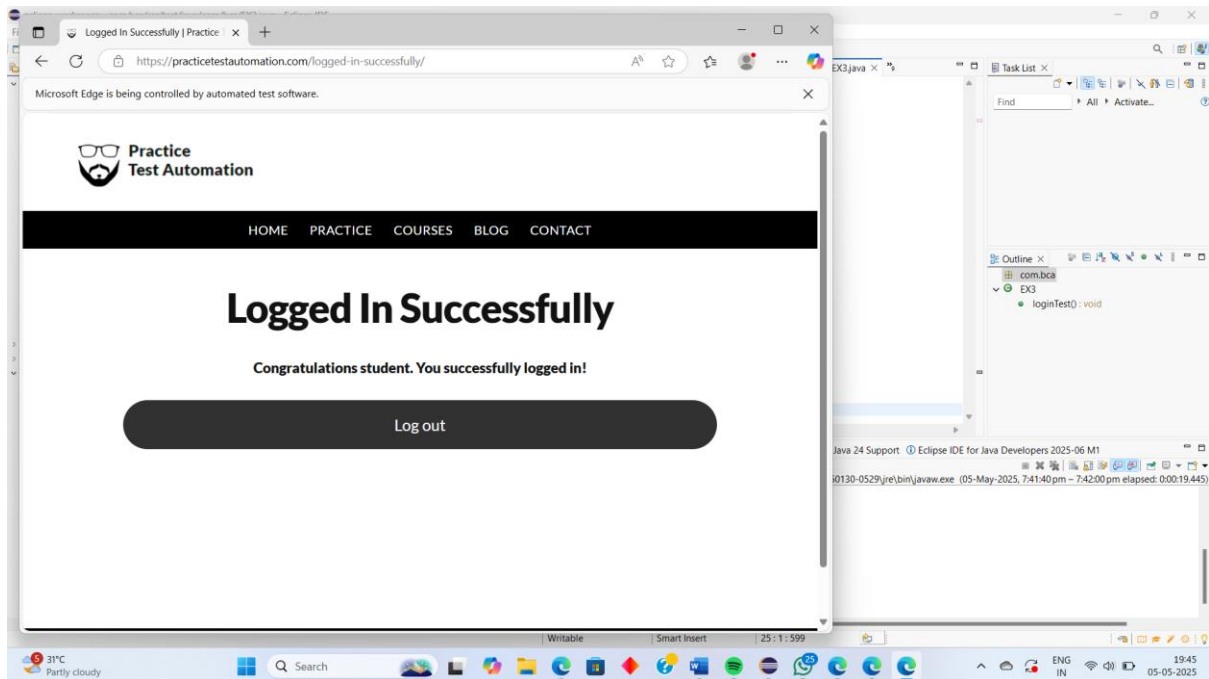

PASSED: com.bca.EX3.loginTest

=====

Default test

Tests run: 1, Failures: 0, Skips: 0

=====

=====

Default suite

Total tests run: 1, Passes: 1, Failures: 0, Skips: 0

=====

Result:

Login successful and title validated.