2. Copy the File to Another

Code:

```c
#include <stdio.h>
#include <stdlib.h>

int main()
{
    FILE *fptr1, *fptr2;
    char filename[100];
    int c;

    printf("Enter the filename to open for reading: ");
    scanf("%s", filename);

    fptr1 = fopen(filename, "r");

    if (fptr1 == NULL)
    {
        printf("Cannot open file %s\n", filename);
        exit(0);
    }

    printf("Enter the filename to open for writing: ");
    scanf("%s", filename);

    fptr2 = fopen(filename, "w");

    if (fptr2 == NULL)
    {
        printf("Cannot open file %s\n", filename);
        fclose(fptr1);
        exit(0);
    }

    c = fgetc(fptr1);

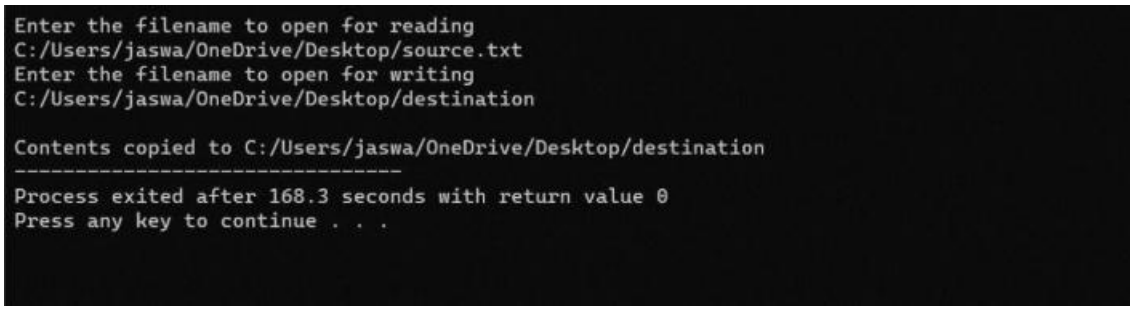
    while (c != EOF)
    {
        fputc(c, fptr2);
        c = fgetc(fptr1);
    }

    printf("\nContents copied to %s\n", filename);

    fclose(fptr1);
    fclose(fptr2);

    return 0;
}
```

Output:


Enter the filename to open for reading
C:/Users/jaswa/OneDrive/Desktop/source.txt
Enter the filename to open for writing
C:/Users/jaswa/OneDrive/Desktop/destination
Contents copied to C:/Users/jaswa/OneDrive/Desktop/destination
Process exited after 168.3 seconds with return value 0
Press any key to continue . . .