


## Microservice design document

Add song endpoint is used to add a song to the database. Expects a PUT request with form data containing 'name', 'artist', and a file upload 'song' in .wav format.

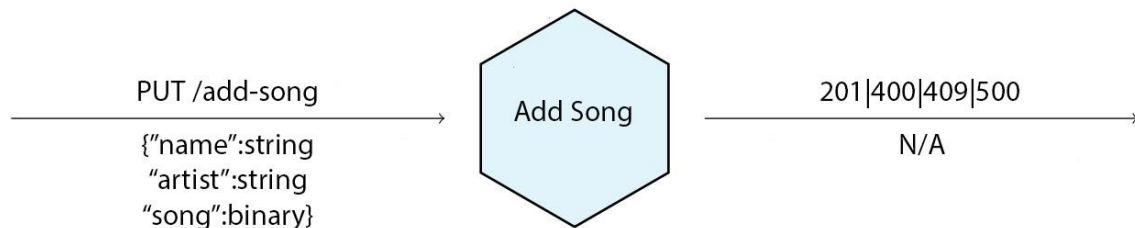

HTTP status codes based on the outcome:

201 - Created

400 - Bad Request (missing or invalid data)

409 - Conflict (song already exists)

500 - Internal Server Error (database insertion failed)

Remove song endpoint is used to remove a song from the database. Expects a DELETE request with form data containing 'name' and 'artist' which will uniquely identify the song.



HTTP status codes based on the outcome:

204 - Success with no content returned

400 - Bad Request (missing or invalid data)

404 - Conflict (song does not exist)

500 - Internal Server Error (database deletion failed)

List songs endpoint is used to list all songs from the database. Expects a GET request with no parameters.



HTTP status codes based on the outcome:

200 - Success with list of songs returned

404 - Conflict (database is empty)

Convert song endpoint is used to get an entire song and its information from a short segment of that song. Expects a POST request with form data containing a file upload 'file' in .wav format.



HTTP status codes based on the outcome:

200 - OK (song found in the database, and returned to user)

400 - Bad Request (missing or invalid data)

404 - Not Found (song not found in the database)

502 - Bad Gateway (error from Audd.io API)