


LJ Tags

LJ Tags is a free package containing some scripts to use ScriptableObjects as an alternative to tags. It comes with several extension methods to enable ease of use.


LJTag:

LJTags are a ScriptableObject that serve as an identifier. They represent the type of object a transform is supposed to be. They can be created like so:

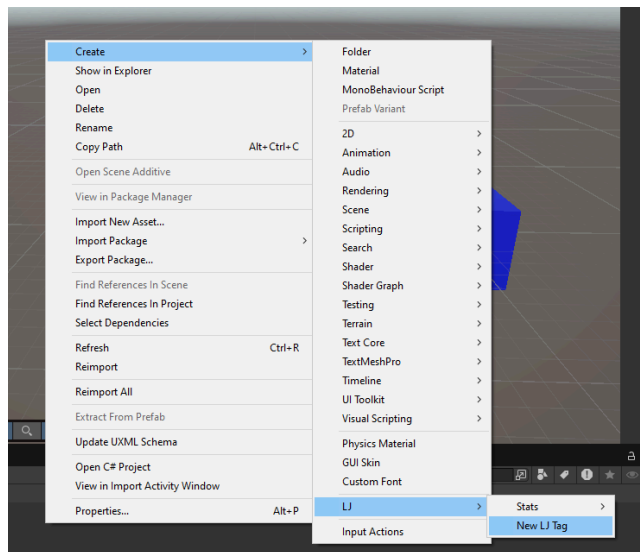


LJTagInstance:

A component that holds tags on an object

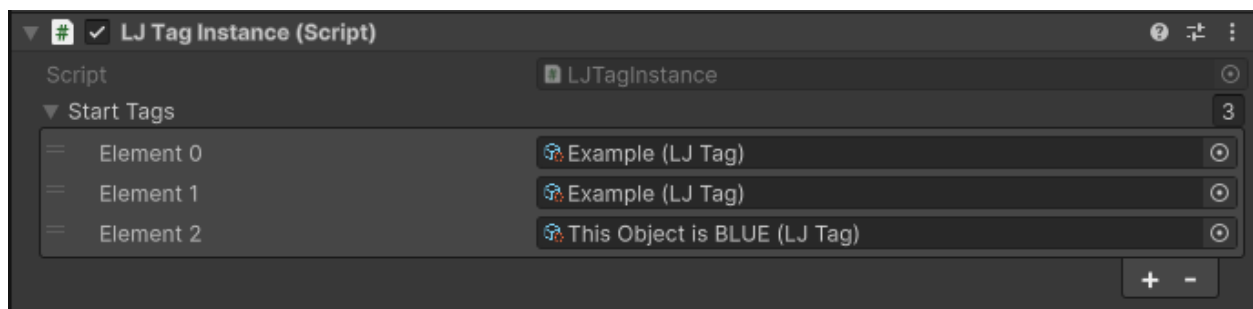

LJTagContext:

An object can 'consider' LJTags to be something else based on its context.

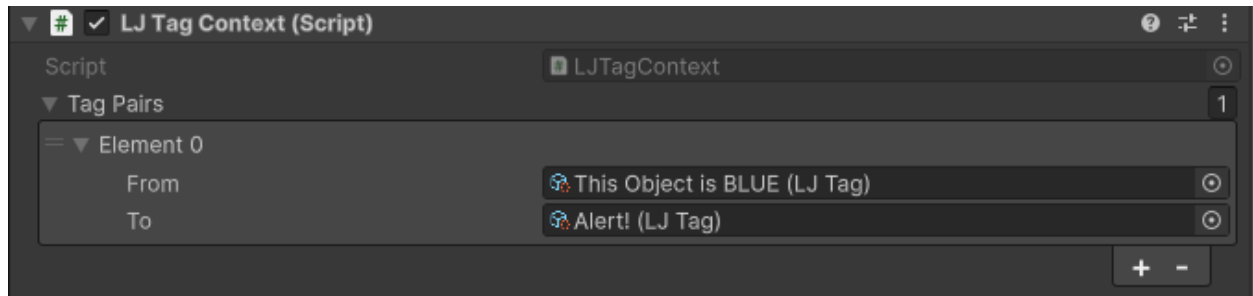

This transform can be passed as an argument so that checking for an 'Alert!' tag will be valid if the checked object has a 'This Object is BLUE' tag. The purpose of this is to make NPC AI easier to write (for example, checking if an object has the tag 'hostile' can be true for players, enemy factions, wild animals, etc.)

Static Methods:

[Transform] **LJTagUtilities.FindWithLJTag(LJTag tag)** - Returns the first or default transform that has the LJTag in question.

Extensions:

transform.AddTag(LJTag tag) - If the transform has a 'LJTagInstance' component it adds the tag to that collection, otherwise it adds an LJTagInstance to the transform and then adds the tag.

Note: Tags are represented as a HashSet and as of right now tags added through code do not appear in the 'start tags' list in the editor.

transform.RemoveTag(LJTag tag) - If the transform has 'LJTagInstance' it will attempt to remove the tag in question.

transform.ChangeTagContext(LJTag from, LJTag to) - This will add to or change existing context.

[bool] **transform.HasTag(LJTag tag, Transform contextTransform)** - If the transform has an instance with the tag, or context considers another tag to be equivalent, returns true. Else returns false.

[LJTagContext] **transform.LJTagContext()** - Glorified GetComponent, only exists to look cleaner.

[LJTag] **tag.WithContext(Transform contextTransform)** - Accepts the 'from,' and returns the 'to' of a tag on a contextTransform. Alternatively it will return the from if there is no proper context.

[Transform] **transform.FindWithTagInHierarchy(LJTag tag)** - Returns the first instance of a transform that has the inputted tag in its tag instance component.

[Transform[]] **transform.LJTagTransformsInSphere(LJTag target, float radius)** - Uses a physics overlap sphere, and returns an array of transforms that have the tag in question.