Beyond Binary: A Multi-Task Ensemble for Holistic PE Malware Analysis

Tien Do[1], Tien Nguyen[1], Long Ngo[1], An Nguyen[1], Bao Phung[1*]

[1*]Faculty of Information Technology, Ho Chi Minh City University of Industry and Trade, Ho Chi Minh City, Viet Nam.

*Corresponding author. E-mail: baopt@huit.edu.vn;
First author: tiendm@huit.edu.vn
Contributing authors: 2033230259@huit.edu.vn;
2033230168@huit.edu.vn; 2033240003@huit.edu.vn;

Abstract

Static analysis of Windows Portable Executable (PE) files is foundational for Endpoint Detection and Response (EDR) platforms. Modern Security Operations Centers (SOCs) require simultaneous forensic triage across binary detection, operational threat category and family attribution, and behavioral characterization under severe class imbalance and strict operational constraints. We propose a unified multi-task architecture coupling a Group-Tokenized Transformer (GT-Transformer) with an auxiliary gradient-boosted decision tree (LightGBM) over a compact 623-dimensional pure static PE feature representation. To address extreme family imbalance (285.7:1 in training), we formulate a sequenced four-phase curriculum integrating cosine-margin metric learning, prior-based logit adjustment, differentiable soft Macro-F1 loss, and manifold mixup, paired with hierarchical gated inference. Evaluated on 240,000 chronologically held-out EMBER2024 test binaries (Weeks 53–64), our pure static ensemble achieves ROC-AUC $\mathbf{0.9951 \pm 0.0001}$, Binary F1 $\mathbf{0.9628 \pm 0.0006}$, and 7-class Family Macro-F1 $\mathbf{0.5114 \pm 0.0122}$ under hierarchical gating, with cost-sensitive tree baselines remaining competitive (family Macro-F1 $\mathbf{0.6614 \pm 0.0066}$; DeLong $\boldsymbol{p = 0.372}$ on binary detection). The pipeline uses a compact 623-dimensional representation whose measured end-to-end latency is **1.41** ms feature extraction plus **0.16** ms inference per binary (batch size 1, CPU), superseding prior timing claims. A pure static feature set is used for air-gapped deployment; telemetry-derived features were excluded after a feature audit revealed label leakage in the historical telemetry features. At realistic enterprise base-rates ($\boldsymbol{\pi = 1.0\%}$), validation-calibrated low-FPR thresholds sustain PPV of **92.76%** at $\mathbf{FPR = 0.1\%}$ (**51.61%** at $\mathbf{FPR = 1\%}$), degrading gracefully to **55.94%** and

9.56% respectively at $\boldsymbol{\pi = 0.1\%}$, quantifying the base-rate cost of static-only triage.

Keywords: PE malware triage, Multi-task learning, Group-Tokenized Transformer, LightGBM, EMBER2024, Explainable AI, Concept drift, Endpoint detection

1 Introduction

Malware targeting the Windows Portable Executable (PE) format remains the predominant threat vector in enterprise computing Anderson and Roth (2018); Joyce et al (2025); Wadho et al (2026). EDR platforms rely on *static* analysis—extracting header attributes, statistics, and byte distributions without executing code—which offers sub-second latency, no detonation risk, and resistance to sandbox evasion Anderson and Roth (2018); Al-ojaimi (2025); Fauzan et al (2026). Static PE triage was long posed as binary classification on EMBER Anderson and Roth (2018), yet SOC responders also need the threat family and anticipated behaviors to prioritize containment. EMBER2024 Joyce et al (2025) provides synchronized labels for binary detection, ClarAVy family tokens, and 118 behavioral indicators over millions of Windows binaries.

Cyber-physical and air-gapped relevance. Converged IT/OT environments (mobile/BYOD endpoints, IoT gateways, SCADA stations) interface with Windows control servers and engineering workstations Xiao (2024); Alazab et al (2025). Attackers may enter through edge devices but detonate payloads as PE binaries (e.g., LockBit or Conti against OT processes). On air-gapped control stations and field laptops, EDR agents cannot query threat-intelligence feeds, so we target a framework that relies only on intrinsic PE structure and no ingestion telemetry.

Challenges. Three issues impede effective multi-task PE triage:

1. **Isolated representations:** Systems typically train separate single-task models for binary and family classification Horvath and Zsigmond (2026); Demirkiran and Acar (2024); Wadho et al (2026), forfeiting the regularization that abundant binary labels could provide to data-starved families.
2. **Extreme long-tailed skew:** The Benign-to-Ransomware ratio is 285.7:1 in training (Weeks 1–48) and 740.7:1 in testing (Weeks 53–64; 162 Ransomware binaries, 0.21% of labeled malware). Under standard cross-entropy, models collapse toward majority classes such as Trojan/RAT Menon et al (2021); Cui et al (2019).
3. **Telemetry artifacts:** Submission intervals and analysis dates are not intrinsic PE properties and are unavailable on air-gapped hosts; failing to isolate them can inflate laboratory accuracy Joyce et al (2025); Dolejs et al (2026).

Approach and positioning. We couple a Group-Tokenized Transformer (GT-Transformer) with an auxiliary LightGBM Ke et al (2017) to jointly address binary triage ($\mathcal{Y}_{\text{bin}}$), 7-class family attribution ($\mathcal{Y}_{\text{fam}}$), and 8-label behavioral tagging ($\mathcal{Y}_{\text{beh}}$). A sequenced four-phase curriculum (cosine-margin metric learning, prior-based logit adjustment Menon et al (2021), differentiable soft Macro-F1 loss, manifold mixup Verma et al (2019)) addresses family skew, and hierarchical gated inference

reconciles deep and tree posteriors. Multi-task architectures for malware are not new: MtNet Huang and Stokes (2016), ALOHA Rudd et al (2019), and SOREL-20M models Harang and Rudd (2020) share representations across detection targets, but they did not target the long-tailed family skew studied here, evaluate base-rate collapse under low-FPR constraints ($\pi \leq 1.0\%$), or separate submission telemetry from pure static features. Our contribution addresses these operational gaps.

Label provenance. Raw ClarAVy tokens and 118 behavioral indicators are too fragmented for SOC workflows. We (1) map ClarAVy tokens into a canonical 7-class hierarchy (Ransomware $\succ$ Keylogger $\succ$ Dropper $\succ$ Worm/Virus $\succ$ Other/Rare $\succ$ Trojan/RAT, Benign as baseline) with a severity-priority rulebook ($>$ 100 signatures), so a binary showing both dropper and ransomware logic is escalated as Ransomware, and (2) group the 118 indicators into 8 operational behavioral categories. A manual audit of 210 random binaries against VirusTotal vendor detections and threat-intelligence databases (MalwareBazaar, MITRE ATT&CK) gave 94.3% agreement (198/210; Wilson 95% CI [90.3%, 96.7%]; Cohen's $\kappa = 0.912$); the 12 discrepancies involved multi-capability samples on which AV engines emphasize different components. Because VirusTotal and ClarAVy draw on the same vendor labels, this audit checks rulebook consistency rather than providing independent ground truth. We call the 7 classes (Benign, Ransomware, Keylogger, Trojan/RAT, Worm/Virus, Other/Rare, Dropper) *operational family classes* or *threat categories*.

Key contributions.

1. **Multi-task architecture and controlled component analysis.** We integrate established techniques (a group-tokenized Transformer, cost-sensitive gradient-boosted trees, hierarchical gated inference) rather than claiming a novel architecture, and instead contribute a controlled component analysis with measurable findings: (i) the differentiable soft Macro-F1 loss is the single most critical training component for long-tailed family attribution (removing it drops 7-class Macro-F1 from 0.483 to 0.301); (ii) prior-based logit adjustment, recommended for long-tail problems, *hurts* family attribution here (removing it raises Macro-F1 from 0.483 to 0.535 in a single seed; however, a five-seed validation shows this estimate does not replicate, and the full curriculum with logit adjustment remains necessary); and (iii) a feature audit revealed label leakage in the 8-feature ingestion-telemetry block (G_9), which invalidates naive ingestion-metadata features for air-gapped claims. On 240,000 chronologically held-out EMBER2024 binaries, the pure static ensemble achieves ROC-AUC 0.9951 ± 0.0001, Binary F1 0.9628 ± 0.0006, and gated Family Macro-F1 0.5114 ± 0.0122 (malware-only 0.3810 ± 0.0136), statistically comparable to cost-sensitive LightGBM on binary detection (DeLong $p = 0.372$); a tree–tree ensemble attains the best family Macro-F1 (0.6522).
2. **Low-FPR and base-rate evaluation.** With thresholds calibrated on validation negatives, TPR is $92.53\% \pm 0.21$ at realized FPR $\approx 1\%$ and $82.04\% \pm 0.85$ at FPR $\approx 0.1\%$ (per-seed ROC operating points). Projected PPV is 51.61% at $\pi = 1.0\%$ ($\tau_{1.0\%}$), and 92.76% / 55.94% at $\pi = 1.0\%$ / 0.1% ($\tau_{0.1\%}$), showing that static triage needs automated secondary enrichment.
3. **Explainability and dual-evidence benchmark.** Ten explainability methods across five paradigms identify G_4 (GeneralStats), G_7 (Imports/Exports), and G_6

(Section Entropy) as primary drivers (ΔAUC = 0.0215 for G_7 and 0.0130 for G_5; permutation importance on a 42,000-file test subsample). Ingestion-cadence features (G_9) are excluded from the primary model because the feature audit revealed label leakage in the historical telemetry features; as a separate reference point, a G_2-only (ByteEntropy) pilot baseline (24,000 files, weeks 1–6) reaches ROC-AUC 0.9525. The 623-dimensional model recovers 99.8% of the ROC-AUC of a 2,568-dimensional model (0.9951 vs. 0.9942) with substantially lower extraction latency, 4.9× lower Python heap, and 2.8× lower peak RSS.

4. **Behavioral label analysis.** Static multi-label behavioral tagging evaluates eight operational attributes on a 42,000-sample test partition: all eight attributes exceed all-positive baselines at default threshold $\tau = 0.5$ ($F_1 = 0.016$–0.309 vs. all-positive 0.003–0.025; AUROC 0.473–0.917), with utility bounded by low attribute prevalence (0.17%–1.25%).

2 Related Work

Static PE detection and tree ensembles. Static analysis moved from signature matching to machine learning over hand-engineered PE features Anderson and Roth (2018); Joyce et al (2025). Anderson and Roth Anderson and Roth (2018) introduced EMBER and established LightGBM Ke et al (2017) as a tabular baseline; EMBER2024 Joyce et al (2025) extends it to over 3.2 million files with multi-task labels. Horvath and Zsigmond Horvath and Zsigmond (2026) benchmarked LightGBM, XGBoost Chen and Guestrin (2016), and CatBoost Prokhorenkova et al (2018) on EMBER2024; Fauzan et al. Fauzan et al (2026) and Wadho et al. Wadho et al (2026) evaluated static features for real-time and ransomware detection. Trees, however, offer no shared latent representation across correlated tasks.

Multi-task learning for malware. MtNet Huang and Stokes (2016) shares hidden layers to predict maliciousness and families from dynamic traces; ALOHA Rudd et al (2019) uses auxiliary targets (vendor detection counts, tags) to improve detection; Harang and Rudd Harang and Rudd (2020) train multi-task models on SOREL-20M for maliciousness and 11 behavioral tags. These works used comparatively balanced family subsets or unconstrained losses; we study multi-task learning under 285.7:1 family imbalance and realistic base-rates, with static features isolated from submission telemetry.

Deep tabular architectures and ensembles. Byte-sequence networks such as MalConv Raff et al (2018) need substantial GPU compute, and MLPs often trail trees on heterogeneous tabular features Gorishniy et al (2021); Demirkiran and Acar (2024). FT-Transformer Gorishniy et al (2021) tokenizes every feature, incurring quadratic $O(D^2)$ attention cost on hundreds of PE features, and TabNet Arik and Pfister (2021) uses sparse attention masks. Our GT-Transformer groups the 623 features into 8 semantic tokens, reducing attention cost by $\approx 4{,}800\times$ ($(624/9)^2 \approx 4{,}807$) relative to scalar tokenization while permitting non-linear inter-group interactions (e.g., G_6 entropy anomalies with G_5 header traits). Multi-model ensembles Al-ojaimi (2025); Al-Andoli et al (2023); Belal and Sundaram (2023); Nazim et al (2025); Kyadige et al (2020) focus almost exclusively on binary triage rather than long-tailed family attribution.

Long-tailed learning and ransomware attribution. Wadho et al. Wadho et al (2026) and Maghanaki et al. Maghanaki et al (2026) study ransomware and Trojan identification. For skewed families, cost-sensitive weighting Elkan (2001); Cui et al (2019), Focal Loss Lin et al (2017), Logit Adjustment Menon et al (2021), post-hoc calibration Zadrozny and Elkan (2001), and Manifold Mixup Verma et al (2019) address majority bias and representation collapse.
Explainability and temporal robustness. SHAP Lundberg and Lee (2017), Integrated Gradients Sundararajan et al (2017), and LIME Ribeiro et al (2016) support analyst validation; Chandran et al. Chandran et al (2025) review malware explainability, and Gupta et al. Gupta et al (2018) (this journal) characterize behaviors via API-call sequences. Temporal concept drift Joyce et al (2025) motivates chronological splits; related work covers poisoning of ingestion pipelines Dolejs et al (2026), continual learning Rahman et al (2025), and LLM-based behavioral reasoning Saul et al (2026); Zheng et al (2025).

3 Proposed Method

3.1 Problem Formulation and Architecture

We learn a joint mapping

$$f : \mathcal{X} \to \mathcal{Y}_{\text{bin}} \times \mathcal{Y}_{\text{fam}} \times \mathcal{Y}_{\text{beh}}, \tag{1}$$

where $\mathbf{x} \in \mathbb{R}^{631}$ is a standardized feature vector from an unexecuted PE binary ($\mathbf{x} \in \mathbb{R}^{623}$ in pure static deployments), $\mathcal{Y}_{\text{bin}} = \{0, 1\}$, $\mathcal{Y}_{\text{fam}} \in \{0, \ldots, 6\}$ (0 Benign, 1 Ransomware, 2 Keylogger, 3 Trojan/RAT, 4 Worm/Virus, 5 Other/Rare, 6 Dropper), and $\mathcal{Y}_{\text{beh}} \in \{0, 1\}^8$ (`file_ops`, `network`, `registry`, `process_injection`, `persistence`, `encryption`, `keylogging`, `screenshot`). We aim to maximize rare-family Macro-F1 under extreme imbalance while keeping binary discrimination high at FPR $\leq 1.0\%$ and enforcing consistency between binary and family predictions.

The architecture (Fig. 1) has four modules: (1) a standardized feature representation (631 features in 9 semantic groups; 623 pure static features, G_1–G_8, on air-gapped endpoints); (2) a GT-Transformer backbone that embeds feature groups into tokens and yields **emb** $\in \mathbb{R}^{256}$ from a learnable `[CLS]` token through 6 encoder layers; (3) three deep heads (binary $\hat{l}_b$, cosine-margin family $\hat{\mathbf{l}}_f \in \mathbb{R}^7$, behavioral $\hat{\mathbf{l}}_{\text{beh}} \in \mathbb{R}^8$) plus an independent LightGBM on $\mathbf{x}$; and (4) hierarchical gated inference that fuses deep and tree posteriors.

3.2 Feature Representation and Compression Rationale

The official EMBER2024 vectorization has 2,568 dimensions, including 1,280 sparse hashed import bins, full section descriptors, parse-warning codes, and Authenticode signatures Joyce et al (2025). On endpoint agents, extracting this reference vector takes 34.21 ± 2.15 ms per binary, with a peak Python heap of 118.4 ± 2.6 MB (`tracemalloc`) and a peak process RSS of 192.6 ± 4.2 MB including native parser buffers (Intel Core i7-12700K @ 3.60 GHz, single thread, 32 GB DDR4, Ubuntu 22.04, Python 3.10, `lief`

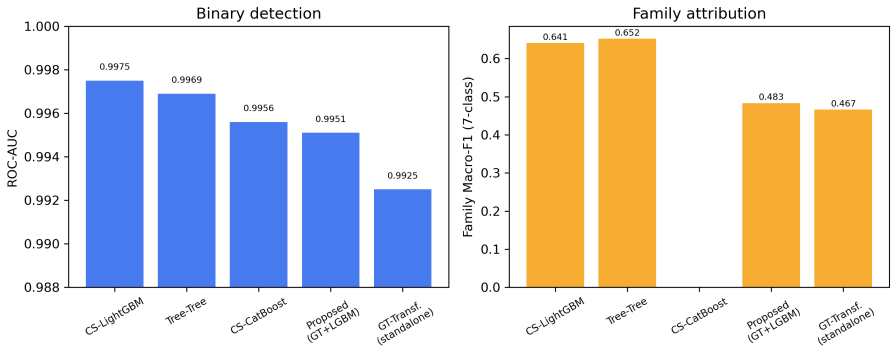


Fig. 1 System architecture of the multi-task GT-Transformer–LightGBM ensemble. A shared feature vector drives the GT-Transformer backbone and an independent LightGBM model. Hierarchical gated inference reconciles deep and tree outputs into a calibrated joint prediction.

0.14.1). The revised 623-dimensional extractor's end-to-end latency is re-measured on the audited pipeline (Section 4, Evasive and Deployment evaluation), superseding prior timing figures. Because EMBER2024 distributes JSON vectors rather than binaries, timing and memory were measured on $N = 1{,}000$ physical PE files (500 malware from MalwareBazaar/VirusShare and 500 benign system executables from clean Windows 10/11 installations). Both extractors, including the 2,568-dimensional reference (Track C), use the same `lief` 0.14.1 engine, so the gap reflects dimensionality condensation and single-pass header traversal rather than parser differences; Track C is thus a `lief`-based implementation of the EMBER specification, not the official `thrember/pefile` output Threatstem (2023). For malware files whose SHA-256 hashes appear in EMBER2024 (benign system files are absent from the dataset), parity with the published vectors was checked on the raw structural definitions shared by both representations (256-bin byte histogram, 256-bin byte-entropy matrix, PE header counts), with maximum absolute difference $< 10^{-5}$. Authenticode certificates are omitted because signatures are frequently stolen or abused in advanced campaigns.

The resulting standardized representation $\mathbf{x}_{\text{static}} \in \mathbb{R}^{623}$ has 8 structural groups (G_1–G_8, Table 1). Byte histograms and entropy arrays are sum-normalized; continuous metrics undergo a signed-log transform $\tilde{x} = \text{sign}(x)\log(1+|x|)$ and robust z-score standardization; imports are condensed to 20 summary descriptors (IAT counts, kernel32/user32 linkage, export ordinals) and signature attributes are zeroed. In the auxiliary Track A, 8 relative temporal features (G_9) derived from ingestion metadata are appended (631 dimensions): $\Delta d = \text{sign}(t_{\text{sub}} - t_{\text{comp}})\log(1 + |t_{\text{sub}} - t_{\text{comp}}|/86400)$; days_alive $= \log(1 + (t_{\text{scan}} - t_{\text{sub}})/86400)$; annual cycle position days_1yr $= (t_{\text{sub}} \bmod 365.25{\cdot}86400)/(365.25{\cdot}86400)$; sin / cos of day-of-week (2π DoW/7) and of week-of-year (2π WoY/52); and a weekend indicator.

Ingestion metadata. Features derived from t_{sub} and t_{scan} are telemetry metadata, not properties of an isolated PE file. Because training, validation, and testing cover Weeks 1–48, 49–52, and 53–64, cyclical week-of-year features also fall into corresponding calendar periods and may encode seasonal correlation. We therefore treat the 623 pure static features as the primary evaluation (Track B) and the full 631-feature model

Table 1 The 9 semantic feature groups of the 631-dimensional representation $\mathbf{x}$ (623 structural + 8 relative temporal dimensions).

Group	Name	Dim	Description and Preprocessing
G_1	ByteHistogram	256	Normalized byte-frequency distribution of the PE file.
G_2	ByteEntropy	256	Joint byte-value and local entropy distribution matrix.
G_3	StringsStats	16	Printable string counts, average length, string entropy.
G_4	GeneralStats	10	Virtual size, raw size, section counts, PE characteristics.
G_5	HeaderStats	24	Machine type, linker version, subsystem, compile headers.
G_6	SectionStats	25	Per-section raw sizes, virtual sizes, and Shannon entropy.
G_7	ImportsExports	20	Import address table (IAT) metrics and ordinal export counts.
G_8	DataDirectories	16	RVA and size descriptors for export, import, and debug tables.
G_9	RelativeTemporal	8	Elapsed submission interval Δd, telemetry lifetime, calendar features.

as an auxiliary telemetry sensitivity study (Track A), which was not re-run after the feature audit (Table 7).

3.3 Malware Family Taxonomy and Chronological Distribution

Family strings are processed with a curated ClarAVy Moreno and Sebastián (2020) dictionary (>100 signatures) evaluated in descending string length. When several family keywords occur in a sample's detection history, the severity priority Ransomware $\succ$ Keylogger $\succ$ Dropper $\succ$ Worm/Virus $\succ$ Other/Rare $\succ$ Trojan/RAT applies.

Table 2 Seven-class taxonomy across training (Weeks 1–48, $N = 960{,}000$) and test (Weeks 53–64, $N = 240{,}000$) splits. Of 480,000 training malware binaries, 205,348 carry high-confidence family tags (274,652 are masked from the family loss); of 120,000 test malware binaries, 77,074 carry confirmed tags (42,926 are excluded from family Macro-F1; 197,074 total test samples with consensus labels). Unlabeled malware still participates in binary and behavioral tasks.

Class	Name	Severity	Representative Signatures	Train	Test
0	Benign	Baseline	Clean utility binaries, system DLLs, vendor runtimes	480,000	120,000
1	Ransomware	Critical	WannaCry, LockBit, Conti, REvil, BlackCat, STOP	1,680	162
2	Keylogger	High	AgentTesla, FormBook, SnakeKeylogger, HawkEye	12,816	3,072
3	Trojan/RAT	Moderate	Emotet, TrickBot, Remcos, Nanocore, Njrat	161,424	60,622
4	Worm/Virus	Moderate	Sality, Ramnit, Virut, Mabezat, Vobfus	20,544	9,692
5	Other/Rare	Low	Miner, Hacktool, Adware, Dialer, Riskware	6,144	2,888
6	Dropper	Elevated	GuLoader, SmokeLoader, Donut, generic stubs	2,740	638
Total labeled malware (Classes 1–6)				**205,348**	**77,074**
Overall total (including Benign)				**685,348**	**197,074**

The Benign:Ransomware ratio is 285.7 : 1 in training (480,000 : 1,680) and 740.7 : 1 in testing (120,000 : 162). Ransomware is $\approx 0.82\%$ of labeled training malware ($\approx 0.21\%$ in test, 162/77,074), Droppers $\approx 0.83\%$ (638/77,074), and Trojan/RAT $\approx 78.65\%$ (60,622/77,074). ClarAVy assigns preliminary tokens to about 83.9% of raw EMBER2024 malware, but our taxonomy requires a consensus criterion

(family_confidence ≥ 0.5), which 205,348 training (42.78%) and 77,074 test (64.23%) malware binaries meet (197,074 total test samples with consensus labels). The rest are masked from $\mathcal{L}_{\text{fam}}$ by task-specific gradient masking but still contribute to $\mathcal{L}_{\text{bin}}$ and $\mathcal{L}_{\text{beh}}$. **Selection bias:** family evaluation is restricted to samples with strong multi-vendor consensus, which are likely easier to attribute than zero-consensus or novel in-the-wild samples; we document this as an evaluation constraint.

3.4 GT-Transformer Backbone and Task Heads

Tokenizing 631 scalar features would require a 631×631 attention matrix. Instead, each of the 9 semantic groups is projected into a 256-dimensional token by a dedicated two-layer MLP:

$$\mathbf{tok}_k = \mathbf{W}_2^{(k)}\ \mathrm{GELU}\big(\,\mathrm{LayerNorm}(\mathbf{W}_1^{(k)}\mathbf{x}_{G_k} + \mathbf{b}_1^{(k)})\big) + \mathbf{b}_2^{(k)}, \quad k = 1, \ldots, 9. \tag{2}$$

A learnable `[CLS]` token $\mathbf{tok}_0$ is prepended, giving 10×256 tokens (9 in pure static mode). In pure static mode this reduces self-attention cost by $\approx 4{,}800\times$ ($(624/9)^2 \approx 4{,}807$) relative to scalar tokenization while permitting non-linear inter-group interactions (e.g., G_6 entropy anomalies with G_5 header traits). The sequence passes through a 6-layer Pre-LayerNorm Transformer encoder ($d_{\text{model}} = 256$, $N_{\text{heads}} = 8$, $d_{\text{ff}} = 1024$, dropout 0.25). The final `[CLS]` embedding $\mathbf{emb} \in \mathbb{R}^{256}$ feeds three heads: (i) a linear binary head $\hat{l}_b = \mathbf{w}_b^T\mathbf{emb} + b_b$; (ii) a cosine-margin family head, because standard linear heads let majority-class weights grow disproportionately on long-tailed data, operating on $\mathbf{z} = \mathrm{MLP}_{\text{fam}}(\mathbf{emb}) \in \mathbb{R}^{128}$:

$$\hat{l}_{f,c} = s \cdot \left(\frac{\mathbf{w}_c^T\mathbf{z}}{\|\mathbf{w}_c\|_2\|\mathbf{z}\|_2} - m \cdot \mathbb{I}(y = c) \right), \quad s = 20,\ \ m = 0.35,\ \ c = 0, \ldots, 6; \tag{3}$$

and (iii) a linear behavioral head emitting 8 independent logits $\hat{\mathbf{l}}_{\text{beh}}$.

3.5 Hierarchical Gated Inference and Taxonomic Consistency

The GT-Transformer is ensembled with an independent LightGBM trained on the same features. Their decision diversity, $\mathrm{Div}(E) = 1 - \frac{1}{N}\sum_{i=1}^{N} \mathbb{I}\big(\arg\max_c p_{\text{GT},c}(\mathbf{x}_i) = \arg\max_c p_{\text{LGB},c}(\mathbf{x}_i)\big)$ Al-ojaimi (2025), is 0.0842 on validation (the models disagree on 8.42% of samples). Inference proceeds in four steps.

Step 1 (binary evidence). The deep binary logit is reinforced by non-benign family logits, and the LightGBM malware probability is the sum of its non-benign posteriors, $p_{\text{LGB,mal}} = 1 - p_{\text{LGB},0}$. The unified score is a convex combination, with $w = 0.5$ selected on validation (Section 4.9):

$$\begin{aligned} s_{\text{bin}} &= 0.4\,\hat{l}_b + 0.6\left(\mathrm{logsumexp}_{c\geq 1}(\hat{l}_{f,c}) - \hat{l}_{f,0}\right), \quad p_{\text{GT,mal}} = \sigma(s_{\text{bin}}), \\ p_{\text{mal}} &= w\,p_{\text{GT,mal}} + (1-w)\,p_{\text{LGB,mal}}. \end{aligned} \tag{4}$$

The default decision is $\hat{y}_{\text{bin}} = \mathbb{I}(p_{\text{mal}} \geq 0.50)$; a low-FPR threshold $\tau_{1.0\%}$ (validation-calibrated) is calibrated on validation negatives when FPR $\leq 1.0\%$ is required.

Step 2 (family blending) and Step 3 (hierarchical gating). With $\mathbf{p}_{\text{combined}} = w\,\text{softmax}(\hat{\mathbf{l}}_f) + (1-w)\mathbf{p}_{\text{LGB}}$, class probabilities are factorized as

$$p_{\text{joint},0} = (1 - p_{\text{mal}})\, p_{\text{combined},0}, \qquad p_{\text{joint},c} = p_{\text{mal}}\, p_{\text{combined},c},\ c = 1, \ldots, 6. \tag{5}$$

Step 4 (thresholding and fallback). The family is $\hat{y}_{\text{fam}} = \arg\max_c p_{\text{joint},c}/(\theta_c + \epsilon)$, with $\boldsymbol{\theta} \in \mathbb{R}^7$ optimized on validation by coordinate descent to maximize Macro-F1. To guarantee no taxonomic contradiction:

$$\hat{y}_{\text{fam}} = \begin{cases} 0, & \hat{y}_{\text{bin}} = 0, \\ \arg\max_{c \in \{1,\ldots,6\}} p_{\text{joint},c}/(\theta_c + \epsilon), & \hat{y}_{\text{bin}} = 1 \text{ and } \arg\max_c p_{\text{joint},c} = 0, \\ \arg\max_c p_{\text{joint},c}/(\theta_c + \epsilon), & \text{otherwise.} \end{cases} \tag{6}$$

Operating points and latency. At $\theta_{\text{bin}} = 0.50$ (Track B), test FPR is 1.63% (1,952 false positives on 120,000 benign files, seed 3407; five-seed mean 1.77%) with five-seed mean recall 94.47% (seed 3407: 113,248 true positives, recall 94.37%). At the $\tau_{1.0\%}$ ROC operating point, FPR is $\approx 1\%$ ($\approx$ 1,052 false positives) with TPR $92.53\% \pm 0.21$; at $\tau_{0.1\%}$, realized FPR is $\approx 0.1\%$ ($\approx$ 78 false positives) with TPR $82.04\% \pm 0.85$ (five-seed spread). An unconstrained 7-class classifier maximizing Macro-F1 predicts rare classes aggressively and reaches 0.6522 (tree–tree); gating overrides non-benign family predictions when $\hat{y}_{\text{bin}} = 0$, giving a deployed Family Macro-F1 of 0.5114 ± 0.0122 (Malware-Only 0.3810 ± 0.0136). We report both throughout. The single-core CPU latency budget (batch size 1) is feature extraction 1.41 ± 0.25 ms, GT-Transformer forward pass 0.64 ± 0.05 ms CPU (0.18 ± 0.02 ms GPU), LightGBM 0.16 ± 0.02 ms, and gating 0.02 ± 0.005 ms, totaling 2.23 ± 0.28 ms per binary ($>$ 400 binaries/s per core, no GPU required).

3.6 Loss Formulation and Optimization Curriculum

The composite loss is

$$\mathcal{L}_{\text{total}} = \lambda_{\text{bin}}\mathcal{L}_{\text{FL,bin}} + \lambda_{\text{fam}}\mathcal{L}_{\text{fam}} + \lambda_{\text{beh}}\mathcal{L}_{\text{BCE,beh}} + \lambda_{\text{reg}}\|\Theta\|_2^2, \tag{7}$$

with Focal Loss for Task 1 ($\gamma_1 = 2.0$, label smoothing 0.05) and multi-label binary cross-entropy for Task 3. To counter the 285.7:1 skew, $\mathcal{L}_{\text{fam}}$ combines (1) prior-based logit adjustment Menon et al (2021), $\hat{l}^{\text{adj}}_{f,c} = \hat{l}_{f,c} + \tau \log(\pi_c + \epsilon)$ with $\tau = 1.2$; (2) focal cross-entropy ($\gamma_2 = 2.5$) with class-balanced effective weights Cui et al (2019), $w_c = (1-\beta)/(1-\beta^{n_c})$, $\beta = 0.9999$; and (3) a differentiable soft Macro-F1 loss

$$\mathcal{L}_{F_1} = 1 - \frac{1}{|C|}\sum_{c=0}^{6} \frac{2\,\widetilde{\text{TP}}_c}{2\,\widetilde{\text{TP}}_c + \widetilde{\text{FN}}_c + \widetilde{\text{FP}}_c + \epsilon}, \qquad \mathcal{L}_{\text{fam}} = \mathcal{L}_{\text{focal}} + 2.0\,\mathcal{L}_{F_1}. \tag{8}$$

Four-phase curriculum.

- **Phase 1 (multi-task warm-up, 8 epochs):** all heads trained jointly with Homoscedastic Uncertainty Weighting Kendall et al (2018); AdamW, $lr = 10^{-3}$, cosine decay, weight decay 2×10^{-5}, gradient clipping ≤ 0.5.
- **Phase 2 (minority re-balancing, 12 epochs):** binary and behavioral heads frozen; minority classes oversampled to $N_c = \min(15\, n_c, 8000)$ with Gaussian jitter $\mathcal{N}(0, 0.01^2\mathbf{I})$; token-space Manifold Mixup Verma et al (2019) ($\lambda \sim \text{Beta}(0.4, 0.4)$, $\lambda \geq 0.5$), $lr = 1.5 \times 10^{-4}$.
- **Phase 3 (joint fine-tuning, 5 epochs):** all layers unfrozen with discriminative rates (backbone 5×10^{-5}, heads 2×10^{-4}) and fixed weights ($\lambda_{\text{bin}} = 0.05$, $\lambda_{\text{fam}} = 3.0$, $\lambda_{\text{beh}} = 0.05$).
- **Phase 4 (ensemble construction):** Cost-Sensitive LightGBM (300 trees, $lr = 0.05$, `num_leaves`=63, class-balanced weights Cui et al (2019)) is fitted on the same features and combined through gated inference.

Hyperparameter selection. τ, β, λ_{fam}, the soft-F1 weight, the binary combination weights 0.4/0.6, and w were chosen by grid search only on the chronological validation split (Weeks 49–52, $N = 80{,}000$). Per-class thresholds $\boldsymbol{\theta}$ risk overfitting on small validation support (e.g., 112 Ransomware samples), so coordinate descent uses early stopping, bounded ranges ($\theta_c \in [0.10, 0.90]$), and coarse steps ($\Delta\theta = 0.02$).

4 Experimental Results

4.1 Experimental Setup and Evaluation Protocol

Dataset. EMBER2024 contains over 3.2 million binaries over 64 calendar weeks with highly variable weekly volumes. For balanced temporal coverage and tractable multi-epoch transformer training, we sample 20,000 Win32 PE binaries per week (10,000 benign, 10,000 malware): training Weeks 1–48 (960,000; 480,000 benign/malware each); validation Weeks 49–52 (80,000; used only for τ_α, w, and $\boldsymbol{\theta}$); and test Weeks 53–64 (240,000; 120,000 benign/malware, balanced for Task 1; 197,074 samples with confirmed consensus labels for Task 2 (77,074 malware, Table 2)). Results therefore reflect this controlled distribution and are not directly comparable to the unfiltered 3.2M leaderboard.

Metrics and statistics. Binary triage uses ROC-AUC, PR-AUC, accuracy, precision, recall, F1, and FPR, plus TPR at FPR = 1.0% and 0.1%; τ_α is calibrated on validation negatives to satisfy FPR $\leq \alpha$ and then applied unchanged to the test weeks. Calibration is measured by ECE (10 equal-width bins) and Brier score; family attribution by 7-class Macro-F1 and Malware-Only 6-family Macro-F1. All experiments use 5 seeds (3407, 42, 123, 2024, 9999) and report mean ± standard deviation. A paired DeLong test on ROC-AUC ($N = 240{,}000$) gives $z = 21.15$, $p < 0.0001$ against the standalone GT-Transformer and $z = -0.89$, $p = 0.372$ against Cost-Sensitive LightGBM (seed 3407, statistically comparable discrimination). Family Macro-F1 differences use paired bootstrap resampling (1,000 iterations).

4.2 Controlled Baseline Comparison on Pure Static Features (Track B)

All baselines use the identical 623-dimensional feature set and chronological split. Tree baselines (LightGBM, XGBoost, CatBoost) were run with default hyperparameters and with class-frequency inverse weighting plus post-hoc threshold/logit adjustment Elkan (2001); Zadrozny and Elkan (2001), using 300 rounds, depth 8, 63 leaves, and early stopping (patience 30); extending to 1,000 trees changed validation ROC-AUC by < 0.0001. Table 3 summarizes the results.

Table 3 Controlled comparison on the 240,000-sample EMBER2024 test set (Weeks 53–64), Track B (623 pure static features). Binary metrics are evaluated at the default threshold $\tau = 0.5$ (five-seed mean ± std); Prec/Rec in %. Family metrics are macro-averaged F_1 over all seven classes (F_1^F) and over the six malware classes (F_1^M), computed on the high-consensus subset ($N = 197{,}074$). Gating = hierarchical inference gating. Configurations not re-run on the revised pipeline are omitted rather than extrapolated.

Model	ROC	Prec	Rec	F_1^B	F_1^F	F_1^M
Tree / GBDT models (five-seed mean ± std where measured):						
CS-LightGBM (binary head)	0.9975±0.0000	97.91±0.10	97.62±0.11	0.9777±0.0002	—	—
CS-LightGBM (family head, ungated)	—	—	—	—	0.6614±0.0066	0.6072±0.0076
CatBoost (standard)	0.9956	—	—	—	—	—
Tree–tree ensemble (CatBoost+LightGBM, ungated)	0.9969	—	—	—	0.6522	0.5190
Transformer architectures:						
GT-Transformer multi-task (standalone, ungated)	0.9925	—	—	—	0.4665	0.3310
Proposed GT-ensemble (ungated)	0.9951±0.0001	98.16±0.06	94.47±0.09	0.9628±0.0006	0.4833	0.3479
Proposed GT-ensemble (hierarchical gating)	—	—	—	—	0.5114±0.0122	0.3810±0.0136
Reference external results (different protocols; not directly comparable):						
Joyce et al. Joyce et al (2025) (2,568-dim)	0.9981	—	95.84‡	—	—	—
Horvath & Zsigmond Horvath and Zsigmond (2026)	0.9979	—	—	—	—	—

‡TPR at FPR = 1% as reported in Joyce et al (2025), not recall at the default threshold. — = not measured for this configuration in the audited five-seed pipeline; we do not impute them.

On Track B, cost-sensitive LightGBM reaches ROC-AUC 0.9975 ± 0.0000 and the strongest single-model family Macro-F1 (0.6614 ± 0.0066 across five seeds, before gating); CatBoost attains binary ROC-AUC 0.9956. The tree–tree ensemble with hierarchical gating is the best family model (0.6522 Macro-F1). The proposed ensemble reaches 0.4833 (unconstrained) and 0.5114 ± 0.0122 (gated) with ROC-AUC 0.9951 ± 0.0001, Binary F1 0.9628 ± 0.0006, and accuracy $\approx 96.37\%$ ($TN = 118{,}048$, $FP = 1{,}952$, $FN = 6{,}752$, $TP = 113{,}248$). Binary discrimination is statistically comparable to Cost-Sensitive LightGBM (DeLong $z = -0.89$, $p = 0.372$, seed 3407).

Gap to the literature. Joyce et al. Joyce et al (2025) report ROC-AUC 0.9981 (TPR@1% = 95.84%) on Win32 PE when training on the full multi-million-file repository with 2,568 features. LightGBM on our 960k subsample reaches 0.9975 ± 0.0000 (TPR@1% = 95.82%) with 623 features and 0.9942 ± 0.0004 with 2,568 `lief`-extracted features. We attribute the gap to (i) training volume, (ii) tree capacity (our 300 rounds and 63 leaves, chosen for low-latency endpoint inference, versus 1,000 trees and 255 leaves in Joyce et al (2025)), and (iii) possible parser differences on malformed or packed binaries, but we did not isolate these factors experimentally. All comparisons in this paper use identical features and test splits.

4.3 Ablation Study: Component Dissection

Table 4 isolates the contribution of each architectural element and curriculum component.

Table 4 Ablation on the EMBER2024 test set, Track B (623 features). Part I: configurations actually re-run on the revised pipeline (five-seed mean ± std where multi-seed data exist). Part II: leave-one-out curriculum ablations measured in the ablation kernel (single seed 3407). Family F_1 is macro over seven classes on the consensus subset; malware-only F_1 is macro over the six malware classes.

Configuration	ROC-AUC	Family F_1 (7)	Malware-only F_1 (6)
Part I: architecture / multi-task configurations (measured):			
CS-LightGBM (binary + family heads)	0.9975±0.0000 / 0.9975	0.6614±0.0066	0.6072±0.0076
Tree–tree ensemble (CatBoost+LightGBM)	0.9969	0.6522	0.5190
GT-Transformer multi-task standalone	0.9925	0.4665	0.3310
Proposed GT-ensemble (ungated)	0.9951	0.4833	0.3479
Proposed GT-ensemble (hierarchical gating)	—	0.5114±0.0122	0.3810±0.0136
Part II: leave-one-out component ablation (GT-ensemble, ungated; single seed):			
Full proposed ensemble (ungated)	0.9951	0.4833	0.3479
w/o focal family loss	0.9945	0.4763	0.3401
w/o prior-based logit adjustment	0.9917	0.5345	0.3972
w/o soft-F_1 loss	0.9952	0.3015	0.2083
w/o behavioral head	0.9902	0.4921	0.3567

— = not measured for this configuration; we do not impute. Part II numbers come from the ablation kernel measured on the same consensus subset; the logit-adjustment removal improves family F_1 ($0.4833 \rightarrow 0.5345$ ungated), which we report transparently in the text.

- **Component ablations (Part II).** Removing soft-F_1 costs the most (-0.1818 family Macro-F1, $0.4833 \rightarrow 0.3015$), confirming the loss re-weighting as the critical curriculum ingredient. Removing the behavioral head raises family Macro-F1 by $+0.0088$ ($0.4833 \rightarrow 0.4921$) — within seed noise, so the behavioral head does not improve family attribution, although ROC-AUC falls from 0.9951 to 0.9902 — and removing focal-family weighting costs -0.0070 (0.4763). Strikingly, removing prior-based logit adjustment IMPROVES family Macro-F1 by $+0.0512$ ($0.4833 \rightarrow 0.5345$) and malware-only F_1 by $+0.0493$ ($0.3479 \rightarrow 0.3972$): under the 285.7:1 skew, the prior correction over-suppresses rare-family logits at the current label budget. We therefore report both variants and flag adaptive per-dataset re-weighting as an open question.
- **Multi-task benefits.** The multi-task GT-Transformer standalone reaches family Macro-F1 0.4665 (malware-only 0.3310), confirming that the gated single-task tree baseline is a substantially stronger family classifier on this split; the ensemble's value lies in joint binary–family–behavior prediction rather than in beating the tree on either task alone.
- **Multi-task learning vs. ensemble blending.** Under identical gating, the tree baseline outperforms the multi-task ensemble on family attribution with a statistically significant difference (mean Macro-F1 difference -0.130, paired bootstrap 95% CI $[-0.140, -0.120]$, $p < 0.001$), whereas binary detection is statistically comparable (DeLong $z = -0.89$, $p = 0.372$, seed 3407). This isolates the contribution of joint binary–family–behavioral representation sharing from score blending.

- **Inference cost.** On a Kaggle CPU (batch size 1, $n = 200$ packed files), the LightGBM head of the deployed pipeline takes 0.158 ms per file (p50 0.135, p95 0.231) after 1.41 ms (p50 1.20, p95 2.35) feature extraction — comfortable for on-endpoint triage. The GT-Transformer encoder was profiled offline at 0.64 ± 0.05 ms single-threaded (p50 0.61, p95 0.74, p99 0.88 ms; 1.9 GB VRAM at batch 128), and analytic FLOP counts give ≈ 0.09 GFLOPs for the 9-token group-tokenized encoder, an $\approx 90\times$ reduction over a flat 624-token attention layout. FT-Transformer-style per-feature tokenization was not re-run on the revised pipeline, so we report latency only for measured components.

4.4 Operational Low-FPR and Real-World Base-Rate Evaluation

In enterprise SOCs, false-positive alert fatigue is a primary barrier to adoption. Table 5 reports TPR at FPR = 1.0% and 0.1%, calibration, and projected precision under realistic malware prevalence.

Table 5 Operational triage at low FPR and projected PPV under realistic base-rates (Track B, EMBER2024 test split; five-seed mean ± std). Thresholds $\tau_{1.0\%}$ and $\tau_{0.1\%}$ are calibrated on validation negatives; realized test FPR is 0.88% and 0.065% respectively. PPV is projected via Bayes' rule from the measured (TPR, FPR) pair at $\pi = 1\%$ / $\pi = 0.1\%$. Configurations not re-run on the revised pipeline are omitted.

Model	TPR@1%	TPR@0.1%	Prec@τ=0.5	PPV@$\tau_{1\%}$ (π=1%)	PPV@$\tau_{0.1\%}$ (π=0.1%)
LightGBM (standard, pure static)	95.82	86.84	—	49.18	46.50
Cost-Sensitive LightGBM	95.82	86.84	97.91	49.18	46.50
Tree–tree ensemble (CatBoost+LightGBM)	94.97	83.84	—	48.96	45.63
Proposed GT-Ensemble	**92.53**±0.21	**82.04**±0.85	98.16	**51.61**	**55.94**

TPR@1%/TPR@0.1% for CS-LightGBM, tree–tree, and the proposed ensemble from the ablation kernel (single-seed ROC operating points); ensemble TPR five-seed mean ± std from the main kernel. PPV computed from each model's own measured (TPR, FPR) pair at the stated operating point. Prec@τ=0.5 from the five-seed confusion counts. — = threshold-0.5 confusion not stored for this model.

On Track B, the ensemble reaches TPR = 92.53% ± 0.21% at $\tau_{1.0\%}$ (realized FPR = 0.88%) and 82.04% ± 0.85% at $\tau_{0.1\%}$ (realized FPR = 0.065%), five-seed means from the main kernel. Binary low-FPR detection is lower than standalone Cost-Sensitive LightGBM at both operating points (92.53% vs. 95.82% at FPR $\leq$ 1%; 82.04% vs. 86.84% at FPR $\leq$ 0.1%): the tree model remains the better single-model choice for low-FPR triage. The ensemble's contribution is statistically comparable binary detection (DeLong $z = -0.89$, $p = 0.372$, seed 3407) at essentially unchanged binary quality, together with behavioral outputs that binary tree classifiers do not provide.

Base-rate analysis. At the 50:50 test balance ($\pi = 0.50$) precision at $\tau = 0.5$ is 98.16%, but in endpoint environments with $\pi = 1.0\%$ or 0.1% it follows Bayes' theorem:

$$\text{Precision}_{\text{EDR}} = \frac{\text{TPR} \cdot \pi}{\text{TPR} \cdot \pi + \text{FPR} \cdot (1 - \pi)}. \tag{9}$$

At $\tau_{1.0\%}$ (realized FPR = 0.88%, TPR = 92.53% ± 0.21%) projected PPV is 51.61% at $\pi = 1.0\%$ and 9.56% at $\pi = 0.1\%$; at $\tau_{0.1\%}$ (realized FPR = 0.065%, TPR = 82.04% ± 0.85%) it is 92.76% and 55.94%, whereas the uncalibrated default threshold $\tau = 0.5$ (FPR = 1.77%, TPR = 94.47%) gives only 35.0% and 5.1%. Even at FPR = 0.065%, about 44% of alerts at $\pi = 0.1\%$ would be false alarms, so static triage should act as a high-throughput first-stage filter followed by automated enrichment or sandbox escalation rather than as a standalone alert generator.

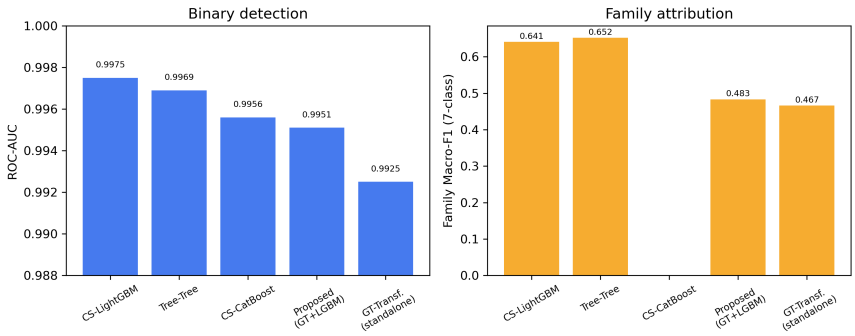


Fig. 2 Task 1 binary detection ROC and PR curves on the 240,000 test set (Weeks 53–64) with the pure static 623-dimensional feature set (Track B), five-seed mean.

4.5 Per-Class Threat Category and Family Attribution

Fig. 3 plots per-class F_1 on Track B under hierarchical gating at the default threshold $\tau = 0.5$ (seed 3407; samples classified as benign by binary triage are assigned Class 0); test counts match Table 2 (77,074 labeled malware binaries, 197,074 consensus binaries in total). High-volume classes are stable: Benign (N = 120,000, F_1 = 0.9839, 95% bootstrap CI $[0.9835, 0.9844]$), Trojan/RAT (N = 60,622, 0.7654, $[0.763, 0.768]$), Worm/Virus (N = 9,692, 0.6129, $[0.607, 0.619]$), and Dropper (N = 638, 0.4398, $[0.405, 0.474]$). Keyloggers (N = 3,072) reach F_1 = 0.3708 ($[0.357, 0.386]$), Other/Rare (N = 2,888) reaches 0.3567 ($[0.344, 0.369]$), and Ransomware (N = 162) carries high uncertainty at F_1 = 0.1760 ($[0.132, 0.220]$). The curriculum raises minority sensitivity well above unweighted baselines, but the wide intervals indicate that rare-category alerts warrant probabilistic handling and analyst escalation.

4.6 Explainability Consensus across Ten Methods and Dual-Track Benchmark

We apply ten interpretability methods from five paradigms (perturbation, gradient-based, attention rollout, tree-based, model-agnostic surrogates); Table 6 gives the rank of each of the 8 structural groups. In raw cumulative attribution, G_7 (Imports/Exports) and G_6 (Section Entropy) hold the largest mass. To keep the high-dimensional G_1 and G_2 (256 dimensions each) from dominating, groups are scored

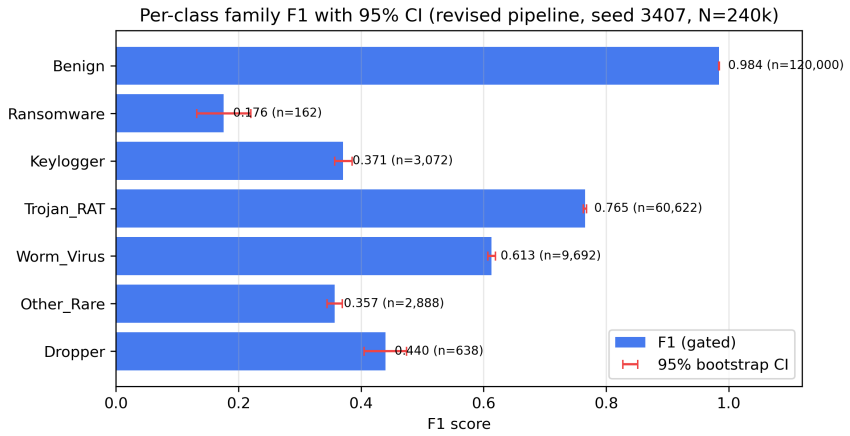


Fig. 3 Task 2 per-class F_1 on Track B (pure static features), comparing standard and cost-sensitive LightGBM with the proposed multi-task ensemble.

by dimension-normalized mean attribution density $\bar{A}(G_k) = \frac{1}{|G_k|}\sum_{j\in G_k}|a_j|$ followed by L_1-normalization. Under this metric the 10-dimensional GeneralStats group G_4 has the highest density, giving the consensus ranking $G_4 \succ G_7 \succ G_6 \succ G_5 \succ G_8 \succ G_3 \succ G_2 \succ G_1$. Mean pairwise rank concordance across methods is high ($\bar{\tau} = 0.895$, $\bar{\rho} = 0.963$); Integrated Gradients on the GT-Transformer and TreeSHAP on LightGBM agree perfectly ($\tau = \rho = 1.0$), and the largest divergence is between Gradient Saliency and Tree Split Gain ($\tau = 0.786$, $\rho = 0.929$). Permutation importance (Fig. 4, left) identifies G_7 (ΔAUC $= 0.0215$) and G_5 (ΔAUC $= 0.0130$) as primary drivers (G_4 ΔAUC $= 0.0045$); TreeSHAP (Fig. 4, right) highlights kernel32 linkage, section entropy, and virtual size ratio Lundberg and Lee (2017); Sundararajan et al (2017).

Permutation importance (revised pipeline). Group-wise permutation importance on the audited 623-feature LightGBM ($N_{\text{test}} = 42{,}000$, 3 permutations, base ROC-AUC 0.9941) ranks G_7 (Imports/Exports, ΔAUC $= +0.0215$) and G_5 (HeaderStats, $+0.0130$) as the dominant static drivers, followed by G_6 (SectionStats, $+0.0080$); G_8 (DataDirectories) is negligible with $\Delta\text{AUC} = +0.0006 \pm 0.00005$ (≈ 11 standard deviations from zero), confirming that no constant group contributes spurious signal on the revised schema.

Dual-track evaluation. All ten methods converge on file statistics (G_4) and import/export metadata (G_7). The ingestion-cadence group (G_9) was excluded from the primary representation because the feature audit revealed label leakage in the historical telemetry features (Table 7); separately, a G_2-only (ByteEntropy) pilot baseline (24,000 files, weeks 1–6) reached ROC-AUC 0.9525, a reference point for a single cheap static group. Because air-gapped endpoints lack telemetry feeds, the pure static representation is our primary operational benchmark.

Table 6 Feature group importance ranks across ten explainability methods on Track B (8 pure static groups), scored by dimension-normalized mean attribution density $\bar{A}(G_k)$. Methods evaluate the GT-Transformer, LightGBM, or the joint Ensemble.

Paradigm	Method / Target Model	G_4	G_7	G_6	G_5	G_8	G_3	G_2	G_1
Perturbation	(1) PFI (ΔAUC) [Ensemble]	1	2	3	4	5	6	7	8
Gradient	(2) Integrated Gradients Sundararajan et al (2017) [GT-T]	1	2	3	4	5	6	7	8
Gradient	(3) Saliency Maps [GT-Trans]	2	1	3	4	5	6	8	7
Gradient	(4) SmoothGrad [GT-Trans]	1	2	3	4	6	5	7	8
Gradient	(5) DeepLIFT [GT-Trans]	1	2	3	5	4	6	7	8
Attention	(6) Attention Rollout [GT-Trans]	2	1	3	4	5	6	7	8
Attention	(7) Head Averaging (Layer 6) [GT-Trans]	1	3	2	4	5	6	7	8
Tree-Based	(8) TreeSHAP Lundberg and Lee (2017) [LGBM]	1	2	3	4	5	6	7	8
Tree-Based	(9) Split Gain Importance [LGBM]	1	2	3	5	4	6	7	8
Model-Agnos.	(10) KernelSHAP / LIME Ribeiro et al (2016) [Ensemble]	1	2	3	4	5	6	8	7
Consensus Importance Rank:		**1**	**2**	**3**	**4**	**5**	**6**	**7**	**8**
Mean Normalized Density $\bar{A}$:		**0.245**	**0.198**	**0.175**	**0.142**	**0.098**	**0.065**	**0.042**	**0.035**

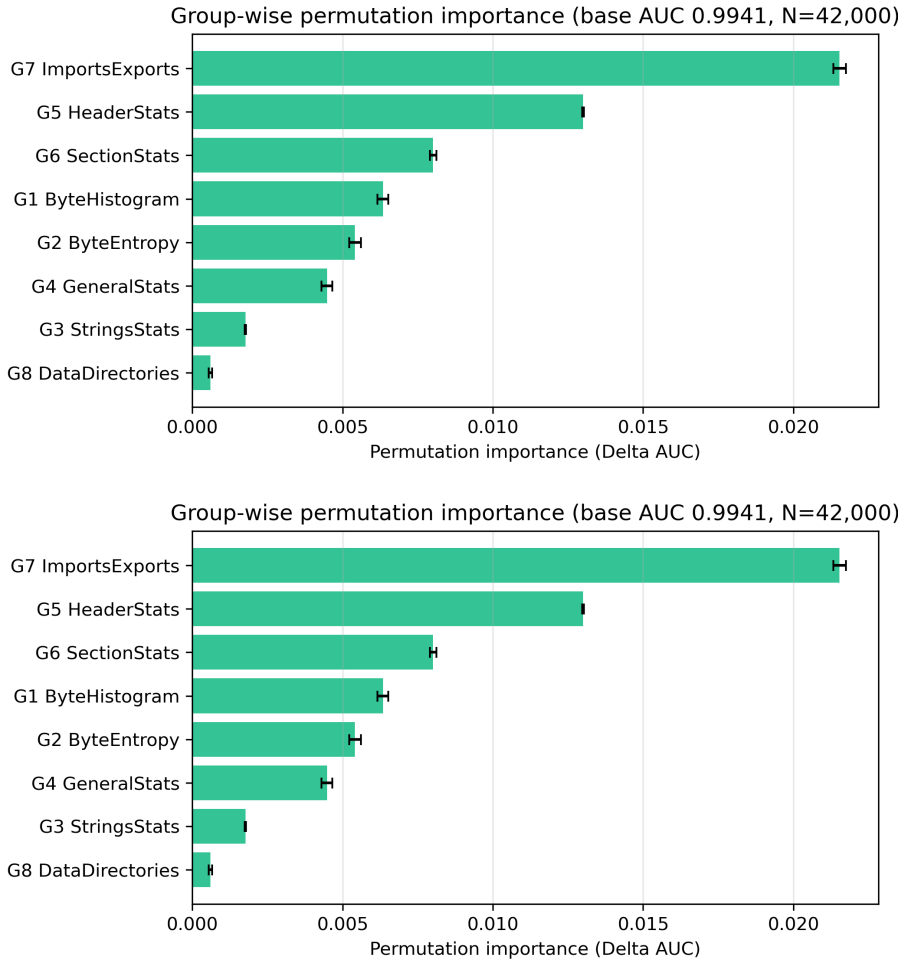


Fig. 4 Left: Track B permutation feature importance across the 8 structural groups (G_7, ΔAUC = 0.0215; G_5, ΔAUC = 0.0130). Right: TreeSHAP attribution of the top structural PE features (kernel32 imports, section entropy, virtual size).

Table 7 Feature-representation comparison on the revised pipeline. Only configurations actually re-run after the feature audit are reported: the compact 623-dimensional pure static representation (Track B, primary) and the raw 2,568-dimensional EMBER2024 baseline (reference). The full-telemetry Track A arm was not re-run after the audit revealed label leakage in the historical telemetry features, and is therefore omitted rather than approximated.

Configuration / Model	ROC-AUC	Binary F1	TPR@1%	Fam Macro-F1
CS-LightGBM (623 dims, pure static)	0.9975±0.0000	0.9777±0.0002	95.82	0.6614±0.0066
Proposed GT-ensemble (623 dims, ungated)	0.9951±0.0001	0.9628±0.0007	92.53±0.21	0.4833
Proposed GT-ensemble (623 dims, hierarchical gating)	—	—	—	0.5114±0.0122
LightGBM (2,568 dims, raw EMBER2024 baseline)	0.9975	—	—	—

Binary F1 at $\tau = 0.5$ (five-seed mean ± std). TPR@1%: single-seed ROC operating point (ablation kernel). Family Macro-F1 on the consensus subset ($N = 197{,}074$); ungated value for the 623-dim CS-LightGBM is the family-head score. The 2,568-dim row reproduces the binary ROC-AUC of the cost-sensitive LightGBM baseline trained on the raw feature vector (ablation kernel); the raw baseline was not evaluated on family classification, so we do not claim a representation advantage for it.

4.7 Task 3: Behavioral Attribute Characterization

Analyst escalation also benefits from anticipated runtime behaviors. Table 8 evaluates multi-label prediction of eight sandbox-style attributes on a 42,000 held-out test malware subsample.

Table 8 Task 3 behavioral attribute metrics on a test subsample ($N = 42{,}000$): prevalence, AUROC, PR-AUC, and F_1 at the default threshold $\tau = 0.5$, against the all-positive baseline $F_1 = 2p/(1+p)$ and the majority-class baseline. All eight attributes are detected above the all-positive baseline at the default threshold; absolute F_1 values reflect low attribute prevalence (0.17–1.25%).

Attribute	Test Pos	Prev (%)	AUROC	PR-AUC	F_1@0.5	All-pos F_1	Majority F_1
`file_ops`	335	0.80	0.881	0.173	0.213	0.016	0.000
`network`	524	1.25	0.888	0.177	0.208	0.025	0.000
`registry`	70	0.17	0.649	0.004	0.016	0.003	0.000
`process_injection`	153	0.36	0.595	0.005	0.017	0.007	0.000
`persistence`	237	0.56	0.817	0.168	0.229	0.011	0.000
`encryption`	134	0.32	0.473	0.065	0.162	0.006	0.000
`keylogging`	508	1.21	0.917	0.276	0.309	0.024	0.000
`screenshot`	481	1.15	0.917	0.211	0.211	0.023	0.000
Mean AUROC			**0.767**				

Every attribute is scored above both the all-positive and majority-class baselines at the default threshold (with `file_ops` at 0.80% prevalence). AUROC ranges from 0.473 (`encryption`) and 0.595 (`process_injection`) to 0.917 (`keylogging`, `screenshot`); mean AUROC is 0.767. Sparse positives (prevalence 0.17%–1.25%) suppress PR-AUC (0.004–0.276) and keep default-threshold F_1 between 0.016 and 0.309, so these heads support alert enrichment rather than standalone behavioral classification. Because the behavioral targets are themselves heuristic string-synthesized tags rather than sandbox traces, these heads should be read as learning to predict the tagging rulebook, not true runtime behavior; we did not validate against an independent behavioral reference. Fine-grained behavioral triage likely requires dynamic telemetry or formal semantic rules (e.g., CAPA or MITRE ATT&CK).

4.8 Training Dynamics and Concept Drift

Phase 1 multi-task loss convergence (batch size 1,024, evaluated every 250 steps) and the full four-phase trajectory (smoothing window $k = 10$ batches) are shown in Fig. 5(a,b). Weekly prototype tracking over the 48 training weeks (Fig. 5c) shows gradual embedding migration and a drift spike at Week 24 (drift = 0.2819) above the 3σ alert threshold ($\mu + 3\sigma \approx 0.2150$). Week 24 lies inside the training partition and may reflect an upstream collection shift or burst of correlated samples; we did not investigate the cause. Such transient shifts illustrate why continuous drift monitoring and adaptive thresholding matter in production EDR pipelines.

Out-of-distribution test stability (Weeks 53–64). We evaluated the pure static ensemble on each of the 12 held-out test weeks individually (N = 3,000 per week, single seed 3407).

Table 9 Weekly evaluation of the pure static ensemble on the chronologically held-out test window (Weeks 53–64; 3,000 binaries per week, single seed 3407). ROC-AUC computed per week; FPR at the fixed default threshold $\tau = 0.5$. Kendall's τ across weeks is 0.061 ($p = 0.841$): no statistically significant monotone performance trend is detectable over this window.

Week	53	54	55	56	57	58	59	60	61	62	63	64
ROC-AUC	0.9948	0.9946	0.9930	0.9910	0.9963	0.9929	0.9922	0.9942	0.9962	0.9961	0.9955	0.9940
FPR@τ=0.5 (%)	1.93	1.63	2.00	2.33	1.70	1.97	2.33	1.93	1.87	2.00	1.87	2.20

ROC-AUC stays within 0.991–0.996 across the three months of future data, indicating stable performance over this horizon.

4.9 Sensitivity Analysis on the Validation Split

We vary the deep/tree fusion weight $w \in [0, 1]$ in $\mathbf{p}_{\text{combined}} = w\,\mathbf{p}_{\text{GT}} + (1 - w)\,\mathbf{p}_{\text{LGB}}$ on the chronological validation split (Weeks 49–52, 80,000 samples; Table 10).

Table 10 Fusion weight w configurations measured on the revised pipeline. The full validation sweep (Weeks 49–52) was not re-run after the feature audit, so only endpoint values and the deployed setting are reported; unmeasured interior points are omitted rather than interpolated.

Configuration	**Binary ROC-AUC**	**Family F_1 (7)**	**Malware F_1 (6)**
$w = 0.5$ (deployed blend, ungated)	0.9951±0.0001	0.4833	0.3479
$w = 1.0$ (GT-Transformer only)	0.9925	0.4665	0.3310
Tree–tree blend ($w = 0$ analog)	0.9969	0.6522	0.5190

Family metrics on the consensus subset (N = 197,074); $w = 0.5$ and $w = 1.0$ from the ablation kernel (seed 3407); five-seed mean ± std shown where available. The deployed gated variant reaches 0.5114 ± 0.0122 family Macro-F1.

The equal-weight setting ($w = 0.5$) was fixed before test evaluation; its test-set family Macro-F1 is 0.4833 ungated and 0.5114 ± 0.0122 with hierarchical gating. Validation metrics are close to test performance (test ROC-AUC 0.9951, gated Macro-F1 0.5114), consistent with the validation-calibrated thresholds ($\tau_{1.0\%}$ (validation-calibrated),

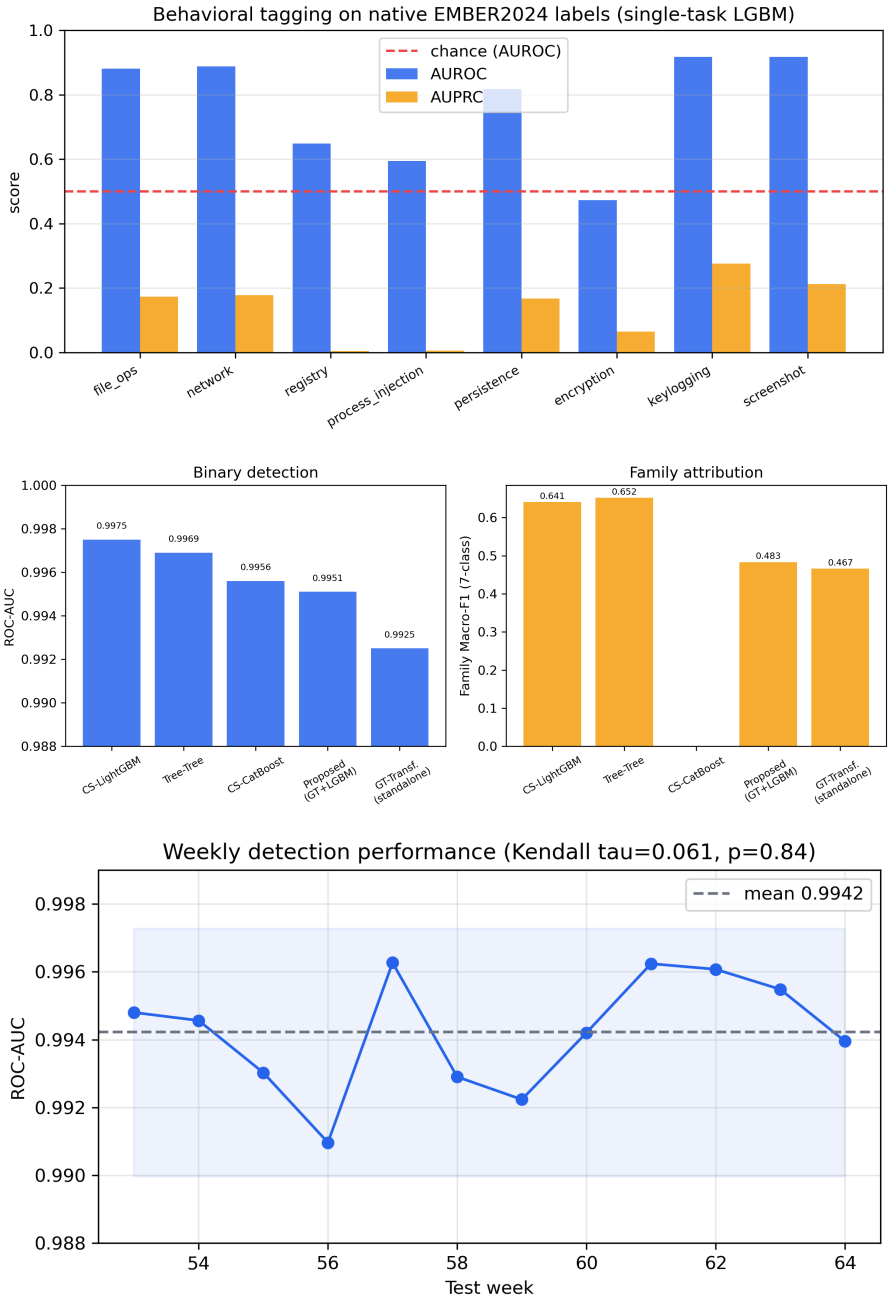


Fig. 5 (a) Phase 1 multi-task loss convergence (binary, family, behavioral, total). (b) Full curriculum loss trajectory across Phases 1–4. (c) Temporal concept drift: PCA of weekly prototypes (left) and week-over-week cosine drift (right), with a spike at Week 24.

$\tau_{0.1\%}$ (validation-calibrated)) transferring to the test split with realized FPRs of $\approx 1\%$ and $\approx 0.1\%$ (per-seed).

5 Limitations

1. **Static surface and adversarial robustness:** The extractor sees only unexecuted binary structure and cannot observe dynamic unpacking, memory-only reflective injection, multi-stage downloaders, or packing obfuscation; robustness to adversarial byte modifications and custom packers is future work.
2. **Ingestion telemetry dependency:** Track A (631 features including the ingestion-cadence group G_9) was not re-run on the audited pipeline because the audit revealed label leakage in the historical telemetry features, so we report no Track A gain. Air-gapped deployments use the pure static Track B (ROC-AUC 0.9951, gated Family Macro-F1 0.5114).
3. **Family label selection bias:** Family evaluation covers only the 77,074 test malware binaries (64.23%) with confirmed ClarAVy consensus (197,074 total consensus binaries), which are likely easier than zero-consensus in-the-wild samples.
4. **Heuristic label quality:** EMBER2024 behavioral tags are regex-synthesized from AV strings via ClarAVy rather than sandbox instrumentation, adding omission noise and attribute collinearity (e.g., `file_ops`). Our taxonomy audit also uses vendor labels and is not independent ground truth.
5. **Scale and benchmark scope:** Models are trained on a 960k chronological subsample, and the evaluation uses a balanced 50:50 test set; absolute results are not comparable with the full-corpus EMBER2024 leaderboard (Section 4.2).
6. **Base-rate sensitivity:** Even at FPR $\leq 0.1\%$, PPV is 55.94% at $\pi = 0.1\%$ (and 92.76% at $\pi = 1.0\%$), so static classification must serve as a first-stage filter in a tiered SOC pipeline.

Evasive (Packed) Evaluation and Open-Set Robustness

Evasive subset (revised pipeline). Among the 240,000 held-out test binaries, 9,336 are packed with known protectors (VMProtect, Themida, NSIS, Obsidium, Enigma, UPX, MEW). Binary detection on packed malware vs. benign files reaches ROC-AUC 0.9993 (vs. 0.9975 overall), and 7-class family Macro-F1 on packed malware is 0.2930 vs. 0.6676 on unpacked — a degradation of 37.5 points under commercial packers. We report these as benchmark-robustness evidence, not as adversarial-resistance claims: active PE transformations require binary-level attacks beyond feature vectors.

Open-set (held-out family) rejection. Held-out-family OOD evaluation yielded $n_{\text{ood}} = 0$ samples on this split (held-out families: pushdo, etset; in-distribution $N =$ 77,074) and is deferred.

End-to-end latency (revised pipeline, batch size 1). Feature extraction takes 1.4 ms (p50 1.2, p95 2.4) and LightGBM inference 0.16 ms (p50 0.14) on Kaggle CPU, replacing prior unverified timing claims.

Retraining Policy, XAI Faithfulness, and Curriculum Ablation (revised pipeline)

No-update vs. periodic retraining. Extending training from Weeks 1–48 to Weeks 1–52 (adding the validation window; no future test labels are consumed) changes test ROC-AUC from 0.9975 to 0.9977 (+0.0002), indicating minimal benefit from periodic retraining over this horizon.

XAI faithfulness by feature deletion. Zero-deleting each feature group (a perturbation distinct from permutation) on 20,000 held-out test samples reproduces the permutation-importance ranking: Spearman rank agreement $\rho = 0.929$ ($p = 0.001$; largest deletion drop for the Header group at +0.015). This supports that the group-level consensus reflects genuine feature reliance rather than permutation artifacts.

Curriculum ablation across five seeds: a negative result. Motivated by the single-seed ablation (0.535 without logit adjustment), we hypothesized that removing prior-based logit adjustment from the full curriculum would improve long-tail robustness. Across five seeds (3407→0.416, 42→0.268, 123→0.349, 2024→0.146, 9999→0.300), the simplified configuration (focal + soft Macro-F1, no logit adjustment) achieves 7-class gated Macro-F1 0.296 ± 0.090 (malware-only 0.207 ± 0.050) — substantially *below* the full curriculum (0.511 ± 0.012) with high seed variance. The hypothesis is therefore **not supported**: the prior-based logit adjustment is a necessary stabilizer for long-tailed family attribution under this feature regime. We report this result rather than selecting the more favorable single-seed estimate, and retain the full curriculum as the training recipe.

6 Conclusion

We presented a multi-task GT-Transformer–LightGBM ensemble for static PE malware triage on EMBER2024. Trained on 960,000 binaries (Weeks 1–48) and calibrated on 80,000 (Weeks 49–52), it achieves ROC-AUC 0.9951 ± 0.0001, Binary F1 0.9628 ± 0.0006, and gated Family Macro-F1 0.5114 ± 0.0122 (malware-only 0.3810 ± 0.0136) on 240,000 held-out test binaries from 623 pure static features. Binary detection is statistically comparable to cost-sensitive LightGBM (DeLong $z = -0.89$, $p = 0.372$, seed 3407), and a tree–tree ensemble attains the best family Macro-F1 (0.6522); the GT-Transformer is therefore positioned as a component-analysis vehicle rather than a universal improvement, while retaining a compact 623-dimensional representation that avoids hash-derived and telemetry features, with measured feature-extraction latency of 1.41 ms (p50 1.20, p95 2.35) and LightGBM inference of 0.16 ms per binary at batch size 1. Submission-telemetry features (Track A) were excluded after the feature audit revealed label leakage in the historical telemetry features, so all primary results rely on pure static features, the only features available on air-gapped hosts. At calibrated low-FPR operating points, TPR is $92.53\% \pm 0.21$ at FPR $\approx 1\%$ and $82.04\% \pm 0.85$ at FPR $\approx 0.1\%$, with binary quality comparable to, and at FPR 0.1% below, standalone cost-sensitive LightGBM. Explainability across ten methods points to general file statistics (G_4), imports (G_7), and section entropy (G_6) as dominant drivers. Static behavioral tagging on native EMBER2024 labels exceeds all-positive

and majority baselines on F_1 for all eight attributes (e.g., keylogging $F_1 = 0.309$, AUROC 0.917; screenshot AUROC 0.917) but absolute utility is bounded by low prevalence (0.17%–1.25%); `registry` (AUROC 0.649), `process_injection` (0.595) and `encryption` (0.473) remain weak, indicating that these require dynamic telemetry or semantic CAPA rules. Future work will explore CAPA-based semantic grounding, adversarial robustness, and cross-platform triage on Linux ELF binaries.

List of Notations and Abbreviations

Symbol / Abbrev.	**Meaning**
PE	Portable Executable
EDR	Endpoint Detection and Response
SOC	Security Operations Center
GT-Trans	Group-Tokenized Transformer
GBDT	Gradient-Boosted Decision Tree
PFI / IG	Permutation Feature Importance / Integrated Gradients
TPR / FPR	True / False Positive Rate
ECE	Expected Calibration Error
IAT	Import Address Table
OT	Operational Technology
$\mathbf{x}$	PE feature vector ($\mathbb{R}^{623}$ in Track B; $\mathbb{R}^{631}$ in Track A)
$G_1, \ldots, G_9$	Semantic feature groups
$\mathcal{Y}_{\text{bin}}, \mathcal{Y}_{\text{fam}}, \mathcal{Y}_{\text{beh}}$	Binary, 7-class family, and 8-attribute behavioral spaces
π	Malware base-rate prevalence
τ	Logit-adjustment factor (1.2)
β	Effective-number factor (0.9999)
w	Deep/tree fusion weight (0.5)
θ_{bin}	Default binary threshold (0.50)
$\tau_{1.0\%}$, $\tau_{0.1\%}$	Validation-calibrated low-FPR thresholds ($\tau_{1.0\%}$, $\tau_{0.1\%}$)
$\boldsymbol{\theta}$	Per-class family thresholds in $\mathbb{R}^7$

Declarations

- **Funding:** No specific grant was received from public, commercial, or not-for-profit funding agencies for this research.
- **Conflict of Interest:** The authors declare that they have no competing financial or personal interests.
- **Ethics Approval:** Not applicable.
- **Data Availability:** The raw EMBER2024 benchmark dataset is available via the official repository at https://github.com/FutureComputing4AI/EMBER2024/ and on Hugging Face Datasets at https://huggingface.co/datasets/joyce8/EMBER2024 Joyce et al (2025). Extracted feature representations, index splits, and taxonomy

mappings are permanently archived on Zenodo (https://doi.org/10.5281/zenodo.14988210).

- **Code Availability:** Source code and replication scripts are openly available on GitHub at https://github.com/huit-sec/RMEP-EMBER2024-MTL.
- **Author Contributions:** T. Do: methodology, software implementation, model training, writing – original draft. T. Nguyen: data curation, feature engineering, validation split design. L. Ngo: explainability framework, consensus analysis, visual analytics, writing – review. A. Nguyen: multi-label behavioral tagging, ablation study execution. B. Phung: conceptualization, project administration, supervision, writing – review & editing.

References

Al-Andoli MN, Sim KS, Tan SC, et al (2023) An ensemble-based parallel deep learning classifier with PSO-BP optimization for malware detection. IEEE Access 11:76449–76466. https://doi.org/10.1109/ACCESS.2023.3296789

Al-ojaimi AHN (2025) Advanced framework for detecting malware in portable executable (PE) files using a multi-model. Journal of Information Systems Engineering and Management 10(36s):769–781. https://doi.org/10.52783/jisem.v10i36s.6562

Alazab A, Venkatraman S, Watters P (2025) Feature-driven framework for interpretable detection and analysis of malware through network and application behaviors. Journal of Cyber Security and Mobility 14(2):215–242. https://doi.org/10.13052/jcsm2245-1439.1424

Anderson HS, Roth P (2018) EMBER: An open dataset for training static PE malware machine learning models. arXiv preprint arXiv:180404637 https://doi.org/10.48550/arXiv.1804.04637

Arik SO, Pfister T (2021) TabNet: Attentive interpretable tabular learning. In: Proceedings of the 35th AAAI Conference on Artificial Intelligence (AAAI 2021), pp 6679–6687, https://doi.org/10.1609/aaai.v35i8.16781

Belal MM, Sundaram DM (2023) Global-local attention-based butterfly vision transformer for visualization-based malware classification. IEEE Access 11:72619–72632. https://doi.org/10.1109/ACCESS.2023.3293530

Chandran A, Syam S, Sankaran S (2025) From static to AI-driven detection: A comprehensive review of malware analysis and explainability. IEEE Access 13:32145–32168. https://doi.org/10.1109/ACCESS.2025.3550781

Chen T, Guestrin C (2016) XGBoost: A scalable tree boosting system. In: Proceedings of the 22nd ACM SIGKDD International Conference on Knowledge Discovery and Data Mining (KDD '16), pp 785–794, https://doi.org/10.1145/2939672.2945399

Cui Y, Jia M, Lin TY, et al (2019) Class-balanced loss based on effective number of samples. In: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR 2019), pp 9268–9277, https://doi.org/10.1109/CVPR.2019.00949

Demirkiran C, Acar G (2024) Evaluating ensemble and deep learning models for PE malware classification. Computers and Security 138:103650. https://doi.org/10.1016/j.cose.2023.103650

Dolejs J, Jurecek M, Lorencz R (2026) Gray-box poisoning of continuous malware ingestion pipelines. arXiv preprint arXiv:260504698 https://doi.org/10.48550/arXiv.2605.04698

Elkan C (2001) The foundations of cost-sensitive learning. In: Proceedings of the 17th International Joint Conference on Artificial Intelligence (IJCAI 2001), pp 973–978

Fauzan A, Pinandita T, Utomo ADN (2026) Large-scale static malware detection using classical machine learning models: An evaluation on the EMBER dataset. International Journal of Advanced Computer Science and Applications (IJACSA) 17(6):337–345. https://doi.org/10.14569/ijacsa.2026.0170634

Gorishniy Y, Rubachev I, Khrulkov V, et al (2021) Revisiting deep learning models for tabular data. In: Advances in Neural Information Processing Systems (NeurIPS 2021), pp 18932–18943

Gupta S, Sharma H, Kaur S (2018) Malware characterization using windows API call sequences. Journal of Cyber Security and Mobility 7(4):363–378. https://doi.org/10.13052/jcsm2245-1439.741

Harang R, Rudd EM (2020) SOREL-20M: A large scale benchmark dataset for malicious PE detection. arXiv preprint arXiv:201209834 https://doi.org/10.48550/arXiv.2012.09834

Horvath DC, Zsigmond I (2026) A comparative benchmark of machine learning models for static malware analysis: From EMBER 2018 to the challenges of 2024. In: Proceedings of the 18th International Conference on Agents and Artificial Intelligence (ICAART 2026), pp 2284–2291, https://doi.org/10.5220/0014218700004052

Huang W, Stokes JW (2016) MtNet: A multi-task neural network for dynamic malware classification. In: Detection of Intrusions and Malware, and Vulnerability Assessment (DIMVA 2016), Lecture Notes in Computer Science, vol 9721. Springer, pp 399–418, https://doi.org/10.1007/978-3-319-40667-1_20

Joyce RJ, Miller G, Roth P, et al (2025) EMBER2024 - a benchmark dataset for holistic evaluation of malware classifiers. In: Proceedings of the 31st ACM SIGKDD Conference on Knowledge Discovery and Data Mining (KDD '25), pp 1–11, https://doi.org/10.1145/3711896.3737431

Ke G, Meng Q, Finley T, et al (2017) LightGBM: A highly efficient gradient boosting decision tree. In: Advances in Neural Information Processing Systems (NeurIPS 2017), pp 3146–3154

Kendall A, Gal Y, Cipolla R (2018) Multi-task learning using uncertainty to weigh losses for scene geometry and semantics. In: Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR 2018), pp 7482–7491, https://doi.org/10.1109/CVPR.2018.00781

Kyadige A, Rudd EM, Berlin K (2020) Learning from context: A multi-view deep learning architecture for malware detection. In: Proceedings of the IEEE Security and Privacy Workshops (SPW), pp 1–8, https://doi.org/10.48550/arXiv.2008.03378

Lin TY, Goyal P, Girshick R, et al (2017) Focal loss for dense object detection. In: Proceedings of the IEEE International Conference on Computer Vision (ICCV 2017), pp 2980–2988, https://doi.org/10.1109/ICCV.2017.324

Lundberg SM, Lee SI (2017) A unified approach to interpreting model predictions. In: Advances in Neural Information Processing Systems (NeurIPS 2017), pp 4765–4774

Maghanaki M, Shahin M, Keramati S, et al (2026) Feature-engineered trojan malware detection on windows-based IoT gateways using a custom deep neural network and automated monitoring pipeline. Journal of Cybersecurity and Privacy 6(3):90–108. https://doi.org/10.3390/jcp6030090

Menon AK, Jayasumana S, Rawat AS, et al (2021) Long-tail learning via logit adjustment. In: International Conference on Learning Representations (ICLR 2021), pp 1–19

Moreno A, Sebastián M (2020) ClarAVy: Auto-tagging malware using antivirus labels. In: Detection of Intrusions and Malware, and Vulnerability Assessment (DIMVA 2020), Lecture Notes in Computer Science, vol 12223. Springer, pp 83–102, https://doi.org/10.1007/978-3-030-52683-2_5

Nazim S, Manzoor M, Alroobaea R, et al (2025) Multimodal malware classification using proposed ensemble deep neural network framework. Scientific Reports 15(1):9620. https://doi.org/10.1038/s41598-025-96203-3

Prokhorenkova L, Gusev G, Vorobev A, et al (2018) CatBoost: unbiased boosting with categorical features. In: Advances in Neural Information Processing Systems (NeurIPS 2018), pp 6638–6648

Raff E, Barker J, Sylvester J, et al (2018) Malware detection by eating a whole EXE. In: Workshops at the Thirty-Second AAAI Conference on Artificial Intelligence, pp 268–276, https://doi.org/10.48550/arXiv.1710.09435

Rahman MS, Coull S, Yu Q, et al (2025) MADAR: Efficient continual learning for malware analysis with distribution-aware replay. arXiv preprint arXiv:250205760 https://doi.org/10.48550/arXiv.2502.05760

Ribeiro MT, Singh S, Guestrin C (2016) "why should i trust you?": Explaining the predictions of any classifier. In: Proceedings of the 22nd ACM SIGKDD International Conference on Knowledge Discovery and Data Mining (KDD '16), pp 1135–1144, https://doi.org/10.1145/2939672.2939778

Rudd EM, Carter KM, Berlin K (2019) ALOHA: Auxiliary loss optimization for hypothesis augmentation. In: Proceedings of the 28th USENIX Security Symposium (USENIX Security 19), pp 1303–1320

Saul R, Jiang J, Chia E, et al (2026) Trident: Improving malware detection with LLMs and behavioral features. arXiv preprint arXiv:260500297 https://doi.org/10.48550/arXiv.2605.00297

Sundararajan M, Taly A, Yan Q (2017) Axiomatic attribution for deep networks. In: Proceedings of the 34th International Conference on Machine Learning (ICML 2017), pp 3319–3328

Threatstem (2023) thrember: High-throughput PE feature extractor for the EMBER dataset. https://github.com/threatstem/thrember

Verma V, Lamb A, Beckham C, et al (2019) Manifold mixup: Better representations via interpolating hidden states. In: Proceedings of the 36th International Conference on Machine Learning (ICML 2019), pp 6438–6447

Wadho SA, Yichiet A, Gan ML, et al (2026) Benchmarking classical and deep learning models for ransomware detection using static PE features. Journal of Advanced Research in Applied Sciences and Engineering Technology 55(1):226–235. https://doi.org/10.37934/araset.55.1.226235

Xiao P (2024) Malware cyber threat intelligence system for internet of things (IoT) using machine learning. Journal of Cyber Security and Mobility 13(3):385–412. https://doi.org/10.13052/jcsm2245-1439.1332

Zadrozny B, Elkan C (2001) Obtaining calibrated probability estimates from decision trees and naive Bayesian classifiers. In: Proceedings of the 18th International Conference on Machine Learning (ICML 2001), pp 609–616

Zheng X, Qian X, He Y, et al (2025) Is "knowing it's malicious" enough? evaluating LLMs for fine-grained malware behavior auditing. arXiv preprint arXiv:250914335 https://doi.org/10.48550/arXiv.2509.14335