Hands-on Lab: Getting started with Apache Airflow

Estimated time needed: 20 minutes

Objectives

After completing this lab you will be able to:

- · Start Apache Airflow.
- · Open the Airflow UI in a browser.
- List all the DAGs.
- List the tasks in a DAG.
- Explore a DAG in the UI.

About Skills Network Cloud IDE


Skills Network Cloud IDE (based on Theia and Docker) provides an environment for hands on labs for course and project related labs. Theia is an open source IDE (Integrated Development Environment), that can be run on desktop or on the cloud. To complete this lab, we will be using the Cloud IDE based on Theia running in a Docker container.

Important Notice about this lab environment


Please be aware that sessions for this lab environment are not persistent. A new environment is created for you every time you connect to this lab. Any data you may have saved in an earlier session will get lost. To avoid losing your data, please plan to complete these labs in a single session.

Exercise 1 - Start Apache Airflow

Open a new terminal by clicking on the menu bar and selecting Terminal->New Terminal, as shown in the image below.



This will open a new terminal at the bottom of the screen as in the image below.



Run the commands below on the newly opened terminal. (You can copy the code by clicking on the little copy button on the bottom right of the codeblock below and paste it wherever you wish.)

Run the command below in the terminal to start Apache Airflow.

- 1 1
- 1. start_airflow

Copied!

Please be patient, it may take upto 5 minutes for airflow to get started.

When airflow starts successfully, you should see an output similar to the one below.

```
theia@theiadocker-rsannareddy:/home/projects startuals Password
Starting your airflow services...

Airflow started, waiting for all services to be ready...

Your airflow server is now ready to use and available with username: airflow password: MTM40D UtcnNhbm5h

You can access your Airflow Webserver at: https://rsannareddy-8080.theiadocker-5-labs-prod-theiak8s-4-tor01.proxy.cognitiveclass.ai

CommandLine:

List DAGs: airflow dags list


List Tasks: airflow tasks list example_bash_operator

Run an example task: airflow tasks test example_bash_operator runme_1 2015-06-01 theia@theiadocker-rsannareddy:/home/projects
```


Exercise 2 - Open the Airflow Web UI

Copy the Web-UI URL and paste it on a new browser tab. You can also click on the URL by holding the control key (Command key in case of a Mac).


You should land at a page that looks like this:

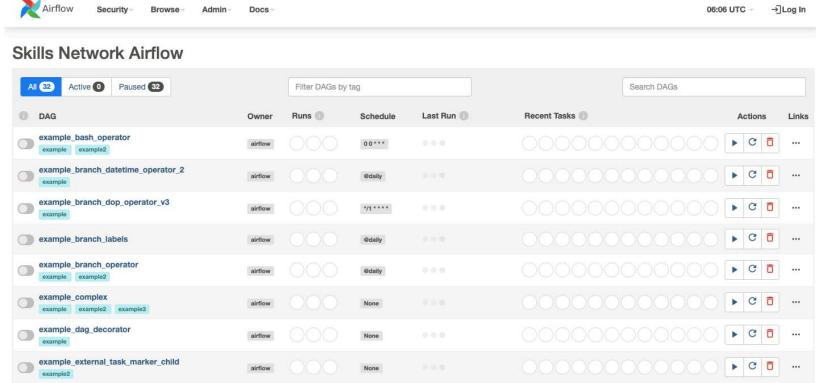

You can Unpause/Pause a DAG using the Unpause/Pause toggle button.



An unpaused DAG looks like this:

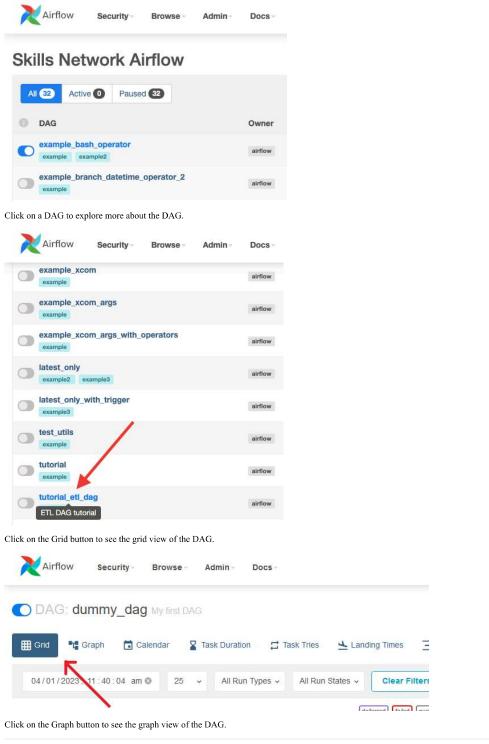

queued running success failed up_for_retry up_for_reschedule upstream_failed skipped scheduled no_status

Auto-refresh C

Exercise 3 - List all DAGs

task2

Apache airflow gives us some handy command line options to work with.

task3

Run the command below in the terminal to list out all the existing DAGs.

- 1. 1
- 1. airflow dags list

Copied!

Exercise 4 - List tasks in a DAG

Run the command below in the terminal to list out all the tasks in the DAG named example_bash_operator.

Copied! Here example_bash_operator is the name of the DAG. Try listing out the tasks for the DAG tutorial. Exercise 5 - Pause/Unpause a DAG. Run the command below in the terminal to unpause a DAG. 1. 1 1. airflow dags unpause tutorial Copied!	 airflow tasks list example_bash_operator
Try listing out the tasks for the DAG tutorial. Exercise 5 - Pause/Unpause a DAG. Run the command below in the terminal to unpause a DAG. 1. 1 1. airflow dags unpause tutorial	Copied!
Exercise 5 - Pause/Unpause a DAG. Run the command below in the terminal to unpause a DAG. 1. 1 1. airflow dags unpause tutorial	Here example_bash_operator is the name of the DAG.
Run the command below in the terminal to unpause a DAG. 1. 1 1. airflow dags unpause tutorial	Try listing out the tasks for the DAG tutorial.
1. 1 1. airflow dags unpause tutorial	Exercise 5 - Pause/Unpause a DAG
1. airflow dags unpause tutorial	Run the command below in the terminal to unpause a DAG.
	1. 1
Copied!	1. airflow dags unpause tutorial
	Copied!

Here tutorial is the name of the DAG.

Pause a DAG.

1. 1

1. airflow dags pause tutorial



 $Try \ to \ unpause \ the \ DAG \ named \ {\tt example_branch_operator}.$

Practice exercises

1. Problem:

 $List\ tasks\ for\ the\ DAG\ example_branch_labels.$

▼ Click here for Hint

Use list option.

▼ Click here for Solution

airflow tasks list example_branch_labels

Copied!

2. Problem:

 $Unpause \ the \ DAG \ example_branch_labels.$

▼ Click here for Hint

Use the unpause option.

▼ Click here for Solution

1. airflow dags unpause example_branch_labels

Copied!

3. Problem:

 $Pause \ the \ DAG \ example_branch_labels.$

▼ Click here for Hint

Use the pause option.

▼ Click here for Solution

1. airflow dags pause example_branch_labels

Copied!

Authors

Ramesh Sannareddy

Other Contributors

Rav Ahuja

Change Log

Date (YYYY-MM-DD) Version Changed By **Change Description** 0.2 Minor formatting changes 2023-05-04 Benny Li 2021-07-05 Ramesh Sannareddy Created initial version of the lab

Copyright (c) 2023 IBM Corporation. All rights reserved.