

# Foundation 5

Extension Key: df\_foundation5

Language: en, de

Version: 2.0.0

Keywords: responsive design template

Copyright 2006-2015, Detlef Fluess, <info@2-ad.de>

This document is published under the Open Content License  
available from <http://www.opencontent.org/opl.shtml>

The content of this document is related to TYPO3

– a GNU/GPL CMS/Framework available from [www.typo3.org](http://www.typo3.org)

## **Wow slider license notice :**

WOWSlider is free for non-commercial use. If you want to use WOWSlider on a school site, your non-commercial blog or non-profit organization website, use it for free.

A license fee is required for commercial use. For more info about commercial licenses, please [click here](#).

## **Wow-Slider Lizenzhinweis:**

WOWSlider ist für den nicht-kommerziellen Gebrauch kostenlos. Wenn Sie WOWSlider auf einer Schulseite, Ihrem nicht-kommerziellen Blog oder Webseite Ihrer non-profit-Organisation benutzen wollen, benutzen Sie es kostenlos.

Für kommerzielle Anwendungen muss eine Lizenzgebühr entrichtet werden.  
[klick hier](#).

# Table of Contents

## Foundation 5..... 1

### What does it do?.....3

### Funktionsauswahl im Inhaltselement.....4

### Das Inhaltselement:.....5

#### Bildeinstellungen.....5

#### Achtung!

Bei Angabe von Breite und/oder Höhe, oder

Bildzuschnitt wird die Funktion Interchange

außer Kraft gesetzt! .....5

Bild-Slider (Orbit).....6

Sticky-Navigation (Magellan).....7

Tabs.....8

Bild-/Text Ausrichtungen.....9

Ausgabebedingungen.....9

Erweitert.....10

### Users manual.....11

<http://zurb.foundation.com>.....11

### Libraries .....12

All settings are easily set in Constant Editor....12

Top Bar.....12

Off Canvas.....13

Side Nav.....14

Sub Nav.....15

Dropdown.....16

Interchange.....17

Pagination.....18

Breadcrumbs.....19

Orbit.....20

Wow-Slider.....23

Magellan.....25

Tabs.....26

### Examples.....27

An TScript Template exmple.....27

TScript Template exmple for HTML Template

below.....27

HTML Template Example (index.html).....27

### FAQ.....28

### Sponsor developments.....29

### ChangeLog.....30

# What does it do?

- Extension installieren
- Script-Update durchführen! (siehe Abbildung 1)
  - Statische Templates einbinden (mindestens erforderlich: *basic df\_foundation5*)





Abbildung 1: Aktualisierungsscript aufrufen

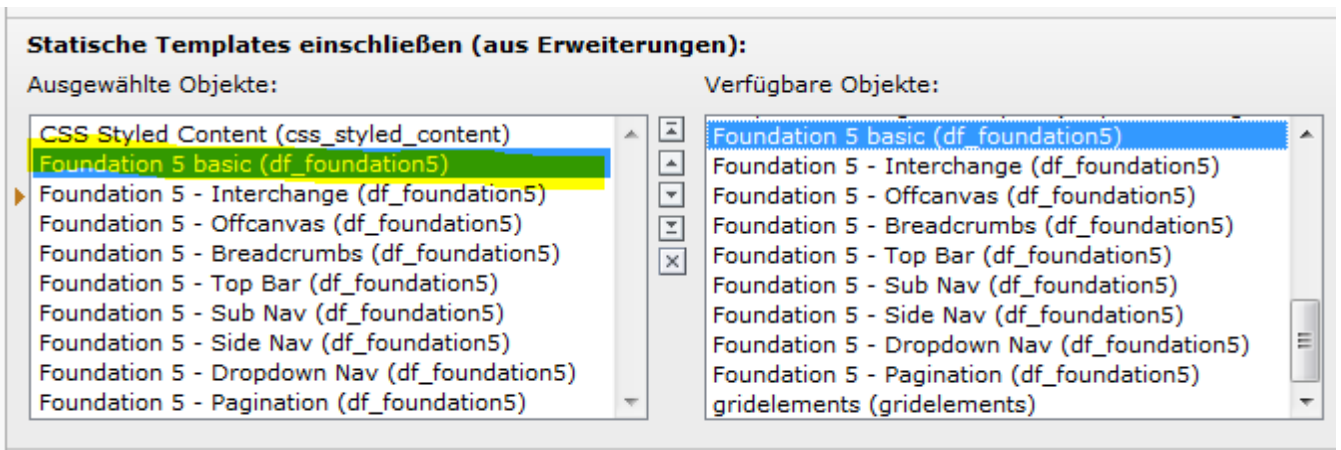

## Wichtig:

**A. Nach einem Major-Update von Version 0.3x auf 1.x (oder höher) müssen die statischen Templates (Foundation 5 ...) neu hinzugefügt werden!**

1. Alle Templates (Foundation 5 ...) entfernen, speichern und schließen.
2. Alle TYPO3 Caches löschen (auch den System Cache).
3. Templates wieder hinzufügen und speichern.

**B. Nach einem Major-Update von Version 1.x auf 2.x müssen die Konstanten über den Konstant-Editor (Konstanten bearbeiten) neu eingestellt werden!**

# Funktionsauswahl im Inhaltselement

Erweiterung konfigurieren df\_foundation5

modules

**Enable features**

**Enable Magellan sticky navigation** [modules.foundation\_5\_Magellan]

☐ (boolesch)

**Enable Tabs** [modules.foundation\_5\_Tabs]

☐ (boolesch)

**Slider module** [modules.foundation\_5\_slider]

Wow-Slider (Optionen)

no slider module

Wow-Slider

Orbit-Slider (deprecated)

## Hinsweis:

**Nach Aktivierung stehen im Inhaltselement die entsprechenden Funktionen zur Verfügung. Die statischen Templates sind nach Aktivierung der Funktion im Kontstant-Editor auswählbar:**

*foundation5 – magellan*

*foundation5 – tab*

*foundation5 – slider (Wow-Slider oder Orbit-Slider)*

# Das Inhaltselement:

## Bildeinstellungen

**Bildeinstellungen**

Breite (Pixel)  Höhe (Pixel)  Rahmen ☒ Aktiviert

Bildzuschnitt ☒ Schnittposition

☐ Unten links

Qualität und Typ  Effekte

### Achtung!

**Bei Angabe von Breite und/oder Höhe, oder Bildzuschnitt wird die Funktion *Interchange* außer Kraft gesetzt!**

## Bild-Slider (Orbit oder Wow-Slider)

Eingefügte Bilder im Inhaltselement werden bei Aktivierung eines Sliders automatisch als Slideshow dargestellt. Verfügbare Optionen für den Slider können über Constants eingestellt werden.

Hinweis:

Um einen Slider nutzen zu können, muß das entsprechende statische Template

**"Foundation 5 - Wow"** oder **"Foundation 5 - Orbit"** hinzugefügt werden!

Die mögliche Auswahl (Wow-Slider oder Orbit-Slider) richtet sich nach der Funktionsauswahl in der Konfiguration der Extension. (siehe "Funktionsauswahl im Inhaltselement")


Allgemein	Bilder	Erscheinungsbild	Zugriff	Kategorien	Ausgabebedingungen	Erweitert
<b>Layout des Inhaltselements</b>						
Layout	Oberer Abstand	Unterer Abstand	Einrückung und Rahmen			
Standard ▾	<input type="text"/>	<input type="text"/>	Standardframe ▾			
<b>Bildeinstellungen</b>						
Breite (Pixel)	Höhe (Pixel)	Rahmen	Orbit-Slider			
<input type="text"/>	<input type="text"/>	<input type="checkbox"/> Aktiviert	<input checked="" type="checkbox"/> Aktiviert			

## Seiteninhalt auf Seite "Start" bearbeiten

Allgemein	Bilder	Erscheinungsbild	Zugriff	Kategorien	Ausgabebedingungen	Erweitert
<b>Layout des Inhaltselements</b>						
Layout	Oberer Abstand	Unterer Abstand	Einrückung und Rahmen			
Standard ▾	<input type="text"/>	<input type="text"/>	Standardframe ▾			
Breite (Pixel)	Höhe (Pixel)	Rahmen	Wow-Slider			
<input type="text"/>	<input type="text"/>	<input type="checkbox"/> Aktiviert	<input checked="" type="checkbox"/> Aktiviert			

## Sticky-Navigation (Magellan)

Wird dieser Haken gesetzt, erscheint die Überschrift als Menüeintrag in der Sticky-Navigation (Magellan).

Allgemein	Erscheinungsbild	Zugriff	Kategorien	Ausgabebedingungen	Erweitert
<b>Sichtbarkeit</b>					
Inhaltselement	In Menüs zeigen	Link zum Seitenanfang anfügen	Magellan (Sticky Navigation)		
<input type="checkbox"/> Deaktivieren	<input checked="" type="checkbox"/> Aktiviert	<input type="checkbox"/> Aktiviert	<input checked="" type="checkbox"/> 		

Hinweis:

Um die Sticky-Navigation (Magellan) nutzen zu können, muss das statische Template "**Foundation 5 - Magellan**" hinzugefügt werden!

Im Template kann die Sticky-Navigation zum Beispiel so eingefügt werden:

```
page.10.marks {
    magellan < lib.magellan
}
```

Weitere Beispiele weiter unten...

## Tabs

Wird dieser Haken gesetzt, erscheint die Überschrift als Tab-Reiter in einer Tab-Navigation (Magellan).

Allgemein	Bilder	Erscheinungsbild	Zugriff	Kategorien	Ausgabebedingungen	Erweitert
<b>Sichtbarkeit</b>						
Inhaltselement	In Menüs zeigen	Link zum Seitenanfang anfügen	Magellan (Sticky Navigation)	Tab Menu		
<input type="checkbox"/> Deaktivieren	<input checked="" type="checkbox"/> Aktiviert	<input type="checkbox"/> Aktiviert	<input type="checkbox"/> Aktiviert	<input checked="" type="checkbox"/> Aktiviert		

Hinweis:

Um die Tab-Navigation nutzen zu können, muss das statische Template **"Foundation 5 - Tabs"** hinzugefügt werden!

Im Template kann die Tab-Navigation zum Beispiel so eingefügt werden:

```
page.10.marks {
  tabs < lib.tabs
}
```

Weitere Beispiele weiter unten...



## Bild-/Text Ausrichtungen

- Large – Desktop-Monitor (voreingestellt max 1024px)
- Medium – Tablet (voreingestellt max 768px)
- Small – Smartphone (voreingestellt max 480px)

**Bildausrichtung**

Position und Ausrichtung    Spalten: (Large)    Spalten: (Medium)    Spalten: (Small)

links    3    2    1

links (Large)    rechts (Large)

6 (50%)    6 (50%)

links (Medium)    rechts (Medium)

6 (50%)    6 (50%)

links (Small)    rechts (Small)

12 (100% - gestapelt)    12 (100% - gestapelt)

Zusl. CSS-Class links    Zusl. CSS-Class class rechts

small-only-center    small-only-center

Ausrichtung der Beschriftung

Rechts

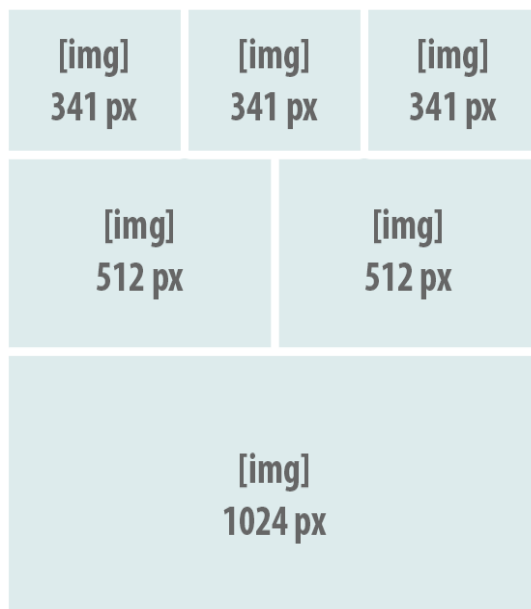


Abbildung 2: Dynamische Bildgrößen nach Anzahl der Bildspalten. Beispiel Desktop's (Large).

Zusätzliche CSS-Class [links/rechts] Beispiel: "small-only-center". Inhalte werden so auf Smartphones zentriert dargestellt.

Weitere Standard-Classes:

Align Left	Align Right	Align Center	Justify
.text-left	.text-right	.text-center	.text-justify
.small-text-left	.small-text-right	.small-text-center	.small-text-justify
.small-only-text-left	.small-only-text-right	.small-only-text-center	.small-only-text-justify
.medium-text-left	.medium-text-right	.medium-text-center	.medium-text-justify
.medium-only-text-left	.medium-only-text-right	.medium-only-text-center	.medium-only-text-justify
.large-text-left	.large-text-right	.large-text-center	.large-text-justify
.large-only-text-left	.large-only-text-right	.large-only-text-center	.large-only-text-justify
.xlarge-text-left	.xlarge-text-right	.xlarge-text-center	.xlarge-text-justify
.xlarge-only-text-left	.xlarge-only-text-right	.xlarge-only-text-center	.xlarge-only-text-justify
.xxlarge-text-left	.xxlarge-text-right	.xxlarge-text-center	.xxlarge-text-justify

## Ausgabebedingungen

Allgemein	Bilder	Erscheinungsbild	Zugriff	Ausgabebedingungen	Erweitert
-----------	--------	------------------	---------	--------------------	-----------

**Zeigen für Ausgabemedium:**

**Nicht zeigen für Ausgabemedium:**

**Bildformat:**

**berührbaren Bildschirm (Touchscreen):**

**Druckausgabe:**

## Erweitert

Zusätzliche CSS-Classes und/oder Inline-Styles für exclusive, Formatierungen eines Inhaltselements.

Beispiel:

Allgemein	Bilder	Erscheinungsbild	Zugriff	Kategorien	Ausgabebedingungen	Erweitert
-----------	--------	------------------	---------	------------	--------------------	-----------

**Zusätzliche CSS-Class:**

**Inline Style:**

# Users manual

**<http://zurb.foundation.com>**

## **Responsive design gets a whole lot faster for users.**

Foundation 5 is the professional choice for designers, developers and teams.

## **For example:**

### **Interchange**

Not just for responsive images any more, Interchange in Foundation 5 lets you create beautifully optimized sites by letting you selectively load entire sections based on the client device type.

### **Medium Grid**

By popular request, Foundation now includes a medium grid that you can leverage, nestled neatly between the small and large grids you're used to. That's a lot less custom code for you to write to make use of intermediate sizes.

# Libraries

All settings are easily set in Constant Editor.

## Top Bar

The Foundation Top Bar gives you a great way to display a complex navigation bar on small, medium or large screens.

### Category

FOUNDATION TOP-BAR NAVIGATION (8) ▼

### Enable features

**top-bar hover** [top-bar.is\_hover]


You can now make the top bar clickable.

 true

**Show Parent Link for Small** [top-bar.mobileShowParentLink]


 true

**Positioning the Top Bar** [top-bar.position]


 contain-to-grid

### Links and targets


**top-bar Entry Level** [top-bar.entryLevel]

 [Empty]

**top-bar Divider Wrap** [top-bar.divider]


 <li class="divider">|</li>

**top-bar ATagParams** [top-bar.atag]

 [Empty]


### Content: 'Header'

**top-bar Title for Small** [top-bar.smallTitle]

 Menu

### Content: 'List of records'

**top-bar Exclude UID List** [top-bar.excludeUidList]

 [Empty]

## Off Canvas

Off-canvas menus are positioned outside of the viewport and slide in when activated. Setting up an off-canvas layout in Foundation is super easy.

### Category

FOUNDATION OFF-CANVAS NAVIGATION (6) ▼


### Enable features

**off-canvas position.** [off-canvas.position]

 left


### Links and targets

**off-canvas Entry Level** [off-canvas.entryLevel]


 [Empty]

### Content: 'Header'


**off-canvas top Label for Small** [off-canvas.topLabel]

 Menu

**off-canvas Title for Small** [off-canvas.smallTitle]


 Menu Top-Label

**off-canvas Submenu Label for Small** [off-canvas.SubLabel]

 SubMenu

### Content: 'List of records'

**off-canvas Exclude UID List** [off-canvas.excludeUidList]

 [Empty]

## Side Nav


Side nav, like you see on the Foundation docs, is a great way to provide navigation for your entire site, or for sections of an individual page.

### Category


FOUNDATION SIDE NAVIGATION (8) ▼

### Enable features

**side-nav Expand all Level** [side-nav.expandAll]

 [Empty]

**side-nav Collapse Level** [side-nav.collapse]

 [Empty]

### Typography

**side-nav Wrap** [side-nav.wrap]

 |


### Links and targets

**side-nav Entry Level** [side-nav.entryLevel]

 2

### Content: 'Header'

**side-nav Leveltitle Wrap** [side-nav.leveltitleWrap]

 <h2>|</h2>

**side-nav Leveltitle Entry** [side-nav.levelTitle]


 2

**side-nav Leveltitle LinkLevel** [side-nav.levelTitleLink]

 -2

### Content: 'List of records'

**side-nav Exclude UID List** [side-nav.excludeUidList]

 [Empty]

## Sub Nav

This simple sub nav is great for moving between different states of a page. We use these frequently to show iterations of something, typically by date, but they're also handy for filters like these.

### Category

FOUNDATION SUB NAVIGATION (3) ▼

### Typography

**sub-nav Wrap** [sub-nav.wrap]


 |

**sub-nav Entry Level** [sub-nav.entryLevel]

 2

### Content: 'List of records'

**sub-nav Exclude UID List** [sub-nav.excludeUidList]

 [Empty]

## Dropdown

We removed the various dropdowns within different UI elements for Foundation 5. Instead, we created a universal dropdown plugin that will attach dropdowns or popovers to whatever element you need.


### Category

FOUNDATION DROPDOWN NAVIGATION (8) ▼


### Enable features

**dropdown-nav LinkType** [dropdown-nav.linktype]


Button or custom class [dropdown-nav.title]

 button


**dropdown-nav Button-/Link-Size** [dropdown-nav.linksizes]

 [Empty]

**ModalBox Button-color** [dropdown-nav.ButtonColor]

 [Empty]

**ModalBox Button-corner** [dropdown-nav.ButtonCorner]


 [Empty]

**dropdown-nav Box-Size** [dropdown-nav.boxsize]

 tiny

**dropdown-nav Title hover** [dropdown-nav.is\_hover]

You can now make the top bar hoverable.

 false


### Content: 'Header'

**dropdown-nav Title** [dropdown-nav.title]

 Title

### Content: 'List of records'

**Drop Down Navigation UID-List** [dropdown-nav.uidlist]

 [Empty]



# Interchange

Interchange uses media queries to dynamically load responsive content that is appropriate for different users' browsers.

## ***Wichtiger Hinweis:***

*Die Eingabe einer Breite oder einer Höhe im Inhaltselement hat Priorität!*

## Category

FOUNDATION INTERCHANGE (4) ▼


**Image maxWidth small** [df\_foundation5.interchange.mediaQueryie-small.img.maxW]

 480

**Image maxWidth medium** [df\_foundation5.interchange.mediaQueryie-medium.img.maxW]

 768

**Image maxWidth large** [df\_foundation5.interchange.mediaQueryie-large.img.maxW]

 1024

**Image maxWidth retina** [df\_foundation5.interchange.mediaQueryie-retina.img.maxW]

 2048

# Pagination

Pagination is a type of navigation that lets users tap through a series of related pages. Moving between pages has become less common with the advent of longer pages and AJAX loading, but if you need pagination, Foundation has you covered.


## Category

FOUNDATION PAGINATION (6) ▼

## Links and targets


**pagination directory** [pagination.directory]

pagination fetched from directory (page-id)

 [Empty]

**pagination treelevel** [pagination.treelevel]

pagination visible from specified pagination directory and in tree level (level list)

 0,1,2,3,4,5,6,7,8,9

## Others

**pagination first label** [pagination.firstLabel]

 <<

**pagination prev label** [pagination.prevLabel]

 <

**pagination next label** [pagination.nextLabel]

 >

**pagination last label** [pagination.lastLabel]

 >>

## Breadcrumbs


Breadcrumbs come in handy to show a navigation trail for users clicking through a site or app. They'll fill out 100% of the width of their parent container.

### Category

FOUNDATION BREADCRUMBS (4) ▼

### Links and targets

**breadcrumbs Entry Level** [breadcrumbs.entryLevel]

 [Empty]

**breadcrumbs Range** [breadcrumbs.range]

 0|3

**breadcrumbs Separator** [breadcrumbs.separator]

 /

**breadcrumbs Separator Position** [breadcrumbs.separatorpos]

Position from the top in px

 1

## Orbit

Orbit is an easy, powerful, responsive image slider that allows users to swipe on touch-enabled devices.

### Category

FOUNDATION ORBIT (15) ▼

### Enable features

**Animation** [df\_foundation5.orbit.animation]

Sets the type of animation used for transitioning between slides

 slide


**Timer Speed** [df\_foundation5.orbit.timer\_speed]

Sets the amount of time in milliseconds before transitioning a slide

 3000


**Pause on hover** [df\_foundation5.orbit.pause\_on\_hover]

Pause Autoplay when a dot is hovered

 false


**Resume on mouseout** [df\_foundation5.orbit.resume\_on\_mouseout]

If pause on hover is set to true, this setting resumes playback after mousing out of slide

 false

**Next on click** [df\_foundation5.orbit.next\_on\_click]

Resume on mouseout: Advance to next slide on click


 true

**Animation Speed** [df\_foundation5.orbit.animation\_speed]


Sets the amount of time in milliseconds the transition between slides will last

 500

**Stack on small** [df\_foundation5.orbit.stack\_on\_small]

 false

**Navigation Arrows** [df\_foundation5.orbit.navigation\_arrows]

 true

**Show dot indicators** [df\_foundation5.orbit.bullets]

Does the slider have bullets visible?


 true

**Slide loop** [df\_foundation5.orbit.circular]

Does the slider should go to the first slide after showing the last?

 true

**Display slide number** [df\_foundation5.orbit.slide\_number]

 true

**Display timer** [df\_foundation5.orbit.timer]

Does the slider have a timer active? Setting to false disables the timer.


 true

**Display slide number text** [df\_foundation5.orbit.slide\_number\_text]

 of

**Variable height** [df\_foundation5.orbit.variable\_height]

Does the slider have variable height content?

 false

**Swipe** [df\_foundation5.orbit.swipe]

 true


## Category

FOUNDATION ORBIT CLASSES (7) ▼

### Enable features


**Class for next** [df\_foundation5.orbit.next\_class]

Class name given to the next button

 orbit-next


**Class for prev** [df\_foundation5.orbit.prev\_class]

Class name given to the previous button

 orbit-prev


**Class for timer** [df\_foundation5.orbit.timer\_container\_class]

Class name given to the timer

 orbit-timer


**Class for preloader** [df\_foundation5.orbit.preloader\_class]

Class given to the preloader

 preloader


**Class for bullets** [df\_foundation5.orbit.bullets\_container\_class]

Class name given to the navigation bullets

 orbit-bullets


**Class for slide number** [df\_foundation5.orbit.slide\_number\_class]

Class name given to the slide number

 orbit-slide-number

**Class for caption** [df\_foundation5.orbit.caption\_class]

Class name given to the caption

 orbit-caption

## Wow-Slider

WOWSlider looks and works flawlessly on all mobile devices, modern and legacy browsers, thanks to the standards compliant, valid, semantic markup and thoroughly optimized script

### Konstanten bearbeiten


 Root TypeScript Template Root TypeScript Template ▼

### Kategorie


FOUNDATION WOW (17) ▼

### Enable features

**Slide caption Effect** [df\_foundation5.wowslider.captionEffect]

 move ▼


**Slide theme** [df\_foundation5.wowslider.theme]

 Geometric ▼

**Slide caption** [df\_foundation5.wowslider.caption]

 1

**Slide loop off** [df\_foundation5.wowslider.loop]

 [Empty]

**Slide controls Icon** [df\_foundation5.wowslider.controls]

 1

**Slide responsive type** [df\_foundation5.wowslider.responsive]

eg. 1 for Boxed, 2 for full width, 3 for full screen

 2


**Slide fullScreen Icon** [df\_foundation5.wowslider.fullScreen]

 ☒

**Slide bullets** [df\_foundation5.wowslider.bullets]

 1

**Slide stopOnHover** [df\_foundation5.wowslider.stopOnHover]

 [Empty]

**Slide PlayPause Icon** [df\_foundation5.wowslider.playPause]

 1


**Slide Effects** [df\_foundation5.wowslider.effect]

tv,lines,bubbles,dribbles,glass\_parallax,parallax,brick,collage,seven,kenburns,cube,blur,bc


 blur

**Slide order** [df\_foundation5.wowslider.onBeforeStep]


eg for random function: function(i,c){return (i+1 + Math.floor((c-1)\*Math.random()))}

 [Empty]


**Slide duration** [df\_foundation5.wowslider.duration]

 20\*100


**Slide delay** [df\_foundation5.wowslider.delay]

 20\*100

**Slide next Label** [df\_foundation5.wowslider.next]

 [Empty]

**Slide prev Label** [df\_foundation5.wowslider.prev]

 [Empty]

**Slide AutoPlay** [df\_foundation5.wowslider.autoPlay]

 1



## Magellan

Magellan is a style-agnostic plugin that lets you give your site sticky navigation. This fixed-position navigation helps users keep track of where they are on a page without scrolling.


### Category

FOUNDATION MAGELLAN (6) ▼

### Enable features

**Threshold** [df\_foundation5.magellan.threshold]

How many pixels until the magellan bar sticks, 0 = auto

 [Empty]

**Destination threshold** [df\_foundation5.magellan.destination\_threshold]

Pixels from the top of destination for it to be considered active

 65


**Destination Overlap** [df\_foundation5.magellan.destination\_overlap]

Overlap compensation in pixels

 45


**Throttle delay** [df\_foundation5.magellan.throttle\_delay]

Calculation throttling to increase framerate


 [Empty]

**Fixed Top** [df\_foundation5.magellan.fixed\_top]

Top distance in pixels assigned to the fixed element on scroll

 [Empty]

**Class used for active sections** [df\_foundation5.magellan.active\_class]

 active

## Tabs


Tabs are elements that help you organize and navigate multiple documents in a single container. They can be used for switching between items in the container.

### Kategorie


FOUNDATION TAB (3)

### Enable features

**Changes the orientation of tabs** [df\_foundation5.tab.orientation]

 horizontal

**Deep linking to tab or tab content** [df\_foundation5.tab.deep\_linking]

 false

**Scroll to the specified element** [df\_foundation5.tab.scroll\_to\_content]

 true

# Examples

## An TScript Template exmple

You can use the following TypoScript code in the setup field of your template:

```
page.10.marks {
    offcanvas < lib.off-canvas
    offcanvas.stdWrap.wrap = <section class="show-for-small"> | </ section>
    topbar < lib.top-bar
    topbar.stdWrap.wrap = <section class="hide-for-small"> | </ section>
}
```

## TScript Template exmple for HTML Template below

```
page = PAGE
page.10 = TEMPLATE
page.10 {
    template = FILE
    template.file = fileadmin/Template/index.html
    workOnSubpart = DOCUMENT
    marks {
        offcanvas < lib.off-canvas
        topbar < lib.top-bar
        dropdown < lib.dropdown-nav
        sidenav < lib.side-nav
        subnav < lib.sub-nav
        pager < lib.pagination
        breadcrumbs < lib.breadcrumbs
        tabs < lib.tabs
        magellan < lib.magellan
    }
}
```

## HTML Template Example (index.html)

```
[...]
<body>
<!--###DOCUMENT### Start-->
<div class="show-for-small">###offcanvas###</div>
<div class="page-wrapper">
    <header>
        <div class="row">
            <div class="large-12 columns">
                <nav class="hide-for-small">###topbar###</nav>
                [...]
            </div>
        </div>
    </header>
    <section>
        <div class="row">
            <div class="large-2 medium-2 columns"> ###sidenav### </div>
            <div class="large-10 medium-10 columns">
                <div class="breadcrumbs">###breadcrumbs###</div>
                <div class="sub-nav">###subnav###</div>
                <div class="magellan">###magellan###</div>
                <div class="magellan">###tabs###</div>
                <div class="content">###content###</div>
                <div class="pager">###pager###</div>
            </div>
        </div>
    </section>
</div>
<!--###DOCUMENT### End-->
</body>
[...]
```

# FAQ

**Foundation is not loaded automatically after the update from v0.3x to v1.x:**

After the major update on 1.x, the static template must be re-mounted.

- Delete Typo3Cache. (Static templates would be all removed).
- Add Static templates new, save, done.

**Foundation constants not loaded after the major update 1.x to v2.x:**

After the major update on 2.x, the Constants in the constant editor must be reset .

# Sponsor developments

Die Pflege und Weiterentwicklung dieser Extension kostet viel Zeit und Geduld. Viele weitere *Foundation 5* Funktionen warten noch auf den Einbau.

Ziel ist es, verfügbare *Foundation 5* Funktionen, so komfortabel wie möglich, in TYPO3 einzusetzen. Vorschläge für Verbesserungen sind immer willkommen.

Sponsoren können die Prioritäten für zügige Weiterentwicklungen fördern!

Spezielle Wünsche (*soweit sie dem Grundgedanken dieser Extension und Foundation 5 entsprechen*) werden auf die ToDo gesetzt. Eine Garantie zur Umsetzung einzelner Wünsche kann jedoch nicht gegeben werden.

**Möchtest Du Sponsor werden dann klicke hier: [Sponsor developments](#)**

Alle Sponsoren werden (falls nicht ausdrücklich untersagt) namentlich gelistet.

**Herzlichen Dank an:**

Peter Kleinow, Dirk Grunenberg, Kim Rücker,

# ChangeLog

Version:

**2.1.0**

Februar 27, 2015

**2.0.1**

Februar 08, 2015

**2.0.0**

Januar 14, 2015

**1.2.8**

November 01, 2014

**1.2.7**

Oktober 30, 2014

**1.2.6**

Oktober 30, 2014

**1.2.5**

Oktober 28, 2014

**1.2.4**

Oktober 26, 2014

**1.2.3**

Oktober 07, 2014

**1.2.2**

September 16, 2014

**1.2.1**

September 16, 2014

**1.2.0**

September 08, 2014

**1.1.0**

September 08, 2014

**1.0.1**

August 29, 2014

**1.0.0**

August 28, 2014

**0.3.0**

August 25, 2014

**0.2.10**

August 25, 2014

Changes:

Wow-Slider added (Orbit-Slider deprecated)

interchange module can now be turned off for individual content items .

Add TYPO3 CMS 7.0.x compatibility.

Version update to 5.5.1

Major Update! For an update from 1.x to 2.x , please instructions in the product literature ! Framework version update to 5.5.0, Tabs added.

Magellan (Sticky Navigation) added.

This fixed-position navigation helps users keep track of where they are on a page without scrolling.

Image description for Orbit Slider added.

Code for T3 v6.2x optimized. (obsolete code removed and bugfixes).

Bugfix: Foundation Initialisation JS added again.

Documentation completed.

Orbit Slider for images added in the content element.

Orbit is an easy, powerful, responsive image slider that allows users to swipe on touch-enabled devices. You can adjust settings using Constants. Small bugs fixed.

Framework version update to 5.4.6

Changelog see: <http://foundation.zurb.com/docs/changelog.html>

Various closing boxes, added as a frame types.

Framework version update to 5.4.5

Changelog see: <http://foundation.zurb.com/docs/changelog.html>

Fix Update-Script

All current values from the field 'imagecols' (columns) are now taken over by Foundation. (Must not be reset!)

**Supports TYPO3 version 6.2.0 - 6.2.99**

Missing documentation added again.

New frame types ModalBox and DropDown added again.

**Supports TYPO3 version 6.2.0 - 6.2.99**

Image Crop fixed.

Code structure for new rules optimized and adjusted.

**Supports TYPO3 version 6.2.0 - 6.2.99**

Incorrect settings ImageCols fixed. **Please update scripts to perform!**

Image Crop: Function for image sections added.

**Supports TYPO3 version 6.2.0 - 6.2.99**

Detail and code optimizations for TYPO3 6.2.

**Supports TYPO3 version 6.2.2 - 6.2.99**

Released only for Version 6.2.x # Foundation Framework version 5.4.0

[<http://foundation.zurb.com/docs/>] # Full support adaptive image, with foundation library interchange via TypoScript source collection.

**Supports TYPO3 version 6.2.2 - 6.2.99**

Released for typo3 6.2 # Foundation Framework version update to 5.4.0 # Includes over 150 kick-ass commits # Adds and fixes

**Supports TYPO3 version 4.5.0 - 6.2.999**

Framework version update to 5.4.0 ## Includes over 150 kick-ass commits # Adds stacking option for button groups # Adds breakpoint classes to icon-bar # Audit and simplify excess colors by changing to variables # Adds Multi-level off-canvas menu

**Supports TYPO3 version 4.7.0 - 6.1.99**

**0.2.9**

July 21, 2014

Framework version update to 5.3.1 Bug fixes and optimizations. Divider Wrap and ATagParams added as constant. - Fix for clearing issue on mobile where lightbox allows vertical scroll outside container - Fixes Reveal bug with modals locking when target is

**Supports TYP03 version 4.7.0 - 6.1.99****0.2.8**

June 23, 2014

Framework version major update to 5.3.0 # Added new component - Switches # Added new component - Icon Bar # Added new component - Vertical Range Sliders # Added disabled state to range-sliders # Added accordion mixins # Added tons of other fix

**Supports TYP03 version 4.7.0 - 6.1.99****0.2.7**

June 13, 2014

Fixed bug in Offcanvas wrap.

**Supports TYP03 version 4.7.0 - 6.1.99****0.2.6**

June 06, 2014

Framework version update to 5.2.3 Bug fixes and optimizations. - Equalizer can now equalize when stacked, or in block grid - Accordion can now be spread across different parent containers - Adds accessibility classes - Joyride Threshold implemented and f

**Supports TYP03 version 4.7.0 - 6.1.99****0.2.5**

May 18, 2014

Small error is eliminated, simultaneous use of Equalizer and Interchange.

**Supports TYP03 version 4.7.0 - 6.1.99****0.2.4**

April 30, 2014

Small optimization for the content type \"images\". Unusable options removed.

**Supports TYP03 version 4.7.0 - 6.1.99****0.2.3**

April 10, 2014

Foundation Update 5.2.2- April 3, 2014 Bug fixed and new Features. - Numerous fixes and changes to Orbit for performance and functionality - Equalizer now only calculates height for visible objects - Off-canvas objects now retain momentum scrolling on

**Supports TYP03 version 4.7.0 - 6.1.99****0.2.2**

March 27, 2014

Documentation updated. Fixed some minor bugs.

**Supports TYP03 version 4.7.0 - 6.1.99****0.2.1**

March 16, 2014

Foundation Update version to 5.2.1. - Fixed Orbit timer stopping after first slide - Fixes captions in clearing Viewer - Orbit Adds vertical scrolling on touch device - Corrected modal dialog z-index

**Supports TYP03 version 4.7.0 - 6.1.99****0.2.0**

March 16, 2014

Adaptive image sizes (Interchange) optimized for typo3. Image widths are automatically divided by column number. Usual breakpoints added. All breakpoints customizable via Constants. Foundation version updated to 5.2.0.

**Supports TYP03 version 4.7.0 - 6.1.99****0.1.5**

March 06, 2014

Optimized trigger for interchange responsive images. Library Pagination added. Minor optimizations.

**Supports TYP03 version 4.7.0 - 6.1.99****0.1.4**

February 17, 2014

small error in the library off canvas adjusted. Manual added.

**Supports TYP03 version 4.7.0 - 6.1.99****0.1.3**

February 17, 2014

small error in the library off canvas adjusted. Manual added.

**Supports TYP03 version 4.7.0 - 6.1.99****0.1.2**

February 17, 2014

Functions added: Image processing - Interchange: uses media queries to dynamically load content responsive did is Appropriate for different users' browsers. Navigation - Off-canvas: menus are Positioned outside of the viewport and slide in When activat

**Supports TYP03 version 4.7.0 - 6.1.99****0.1.1**

February 12, 2014

- ZURB Foundation added 5 version 5.1.1 - Optional libraries outsourced for navigation as static templates. (if required please add) - Configurations possible on Constants

**Supports TYP03 version 4.7.0 - 6.1.99**

**0.1.0**

February 12, 2014

- ZURB Foundation 5 version 5.1.1 added - Optional libraries outsourced as static templates for navigation. (if required please add) Configurations on Constants possible. Example of use: page.10 <lib.off-canvas page.10.stdWrap.wrap = <section class=\"sh

**Supports TYP03 version 4.7.0 - 6.1.99**

**0.0.3**

February 12, 2014

small bug fixes and custom css optimization.

**Supports TYP03 version 4.7.0 - 6.1.99**

**0.0.2**

February 11, 2014

small bug fixes.

**Supports TYP03 version 4.7.0 - 6.1.99**

**0.0.1**

February 06, 2014

new zurb.foundation version 5

**Supports TYP03 version 4.7.0 - 6.1.99**