LOPSWAP: OFFCHAIN LIQUIDITY LAYER

White Paper
{Denis Bukov on behalf of the Lopswap Core Contributors}
Version 1.0 — September 2024

ABSTRACT

The rise of DeFi protocols has enabled open access to yield and liquidity markets, but most solutions require users to give up custody, lock capital, or interact with complex vault logic. Lopswap introduces a wallet-native liquidity layer that allows users to create and manage offchain liquidity pools directly from their wallets, with full flexibility, composability, and instant yield upon execution.

Built on top of the 1inch Limit Order Protocol, Lopswap lets users define pool parameters offchain and earn rewards trustlessly the moment their liquidity is filled — without deposits, staking, or lockups. The protocol supports custom pool logic, is gasless until execution, and is fully compatible with multi-chain deployment. Liquidity remains entirely in the user's wallet and can be reused across multiple pools simultaneously, maximizing capital efficiency without restricting access or mobility.

Lopswap bridges the gap between capital efficiency and user control, offering an extensible and non-custodial alternative to lending platforms, AMMs, and vault strategies.

***K*eywords** DeFi · Liquidity Layer · Non-custodial · Offchain Pools · 1inch Protocol · Capital Efficiency

1 Introduction

In recent years, Decentralized Finance (DeFi) has transformed the way users interact with financial products — enabling open access to lending, trading, and yield generation through permissionless protocols. However, these innovations often come with trade-offs in terms of user control, capital efficiency, and complexity.

Most DeFi protocols that offer yield opportunities such as AMMs, lending platforms, and vault strategies require liquidity providers to lock funds into smart contracts. This exposes users to custodial risks, delayed access, and capital fragmentation. Liquidity becomes "stuck" within individual protocols, making it difficult to reuse or reallocate across different strategies in a dynamic manner.

At the same time, user expectations have evolved: capital should remain under user control, yield should be immediate, and liquidity strategies should be flexible, composable, and portable across platforms.

Lopswap introduces a new design paradigm - an offchain liquidity layer that operates entirely from the user's wallet. Liquidity remains non-custodial until the moment of execution, and can be reused across multiple strategies without friction or lockup. Built on top of the trusted 1inch Limit Order Protocol, Lopswap enables gasless pool creation, instant yield realization, and secure onchain execution. All from a single interface.

By redefining how liquidity is offered and consumed, Lopswap aims to bridge the gap between capital efficiency and user sovereignty, setting a new standard for non-custodial yield generation in DeFi.

2 Problem Statement

Decentralized Finance has unlocked new opportunities for yield generation, primarily through platforms that utilize user-provided liquidity — including automated market makers (AMMs), lending and flashloan protocols, and yield vaults. While these systems have driven significant innovation, they share a common architectural flaw: liquidity must be removed from the user's control and locked into smart contracts.

This approach introduces several key problems for liquidity providers:

- **Custodial risk:** Although technically non-custodial, the protocol takes control of the assets until the position is exited.
- **Inflexibility and lockups**[1]**:** Funds are inaccessible while active, often requiring costly or time-delayed withdrawals.
- **Capital fragmentation**[2]**:** The same tokens cannot be used across multiple platforms or strategies simultaneously.
- **Operational friction:** Creating, modifying, or exiting a position requires onchain transactions — which can be expensive and slow.
- **Complexity:** Users must understand the internal logic of each protocol, including impermanent loss, interest accrual, or vault rebalancing.

This model forces users to choose between yield and flexibility — introducing trade-offs that hinder capital efficiency and discourage active liquidity management.

3 What is Lopswap

Lopswap is a wallet-native, offchain liquidity layer that enables users to earn yield without giving up custody of their assets. Built on top of the 1inch Limit Order Protocol[3, 4], Lopswap allows users to create and manage liquidity offers offchain with execution occurring only when matched by an external counterparty.

Unlike traditional DeFi protocols, Lopswap separates liquidity intent from custody and execution, enabling a new class of composable and revocable liquidity strategies. By keeping assets in the user's wallet and leveraging EIP-712[5] signatures, it introduces a flexible, gasless, and non-custodial framework for capital deployment.

3.1 Key Innovations

Lopswap introduces a fundamentally different approach to liquidity provisioning, based on the following principles:

- **Wallet-native design:** Liquidity remains entirely in the user's wallet before, during, and after execution, never locked or held by the protocol.
- **User-defined control:** The user decides when and how liquidity is utilized, with no enforced schedules or lockups.
- **Capital composability:** The same tokens can simultaneously participate in multiple pools, maximizing reuse and allocation efficiency.
- **Zero lock-in:** Users can withdraw, reassign, or modify liquidity at any time and instantly.
- **Direct rewards:** Fees and payouts are delivered automatically to the user's wallet upon execution with no need to stake, claim, or wrap tokens.

This architecture enables a new class of permissionless, revocable, and yield-bearing liquidity strategies designed to prioritize capital efficiency without sacrificing user sovereignty.

3.2 Use Cases

Lopswap supports a wide range of liquidity applications across user types and execution contexts. The following examples illustrate how its offchain architecture can be leveraged for capital-efficient, flexible strategies:

Dynamic Yield Provision Without Lockups

User aims to generate yield on idle USDC without losing custody or incurring transaction costs. With Lopswap, the user can define multiple liquidity pools with varying parameters (e.g., price targets, taker tokens, expiration time) that remain active offchain. Execution occurs only when matched, and funds remain in the wallet until the moment of transfer.

Private OTC Liquidity Offers

A DAO or treasury manager seeks to provide liquidity to a strategic partner under pre-agreed terms. Using Lopswap, the liquidity can be offered through signed orders scoped to the counterparty's address. This ensures that only the designated party can execute the offer, while funds remain fully accessible and revocable by the provider at any time.

AMM-like Liquidity Provision with Offchain Pricing Curves

Lopswap can emulate automated market making behavior through a series of overlapping offchain pools that represent price bands or dynamically adjusted rates. For example, a liquidity provider may define multiple symmetric orders with incrementally increasing and decreasing prices across a range (similar to Uniswap v3 ticks). By combining these pools and updating them offchain based on market conditions, the provider can approximate AMM-like behavior offering continuous liquidity across a spectrum of prices, while retaining full custody of funds and avoiding impermanent loss. Unlike traditional AMMs, Lopswap-based liquidity is revocable, programmable, and gasless until matched.

Flash Loan Participation from Idle Balances

A user holds idle tokens in their wallet that are not currently used in any protocol. Through Lopswap, they can expose this liquidity for one-block flash loan usage with a predefined execution fee. If a borrower finds the liquidity useful, they execute the transaction and the lender earns a direct payout in the same transaction without locking funds or incurring risk beyond the atomic execution.

Automated Execution with External Triggers

A trading bot monitors market conditions and automatically uses Lopswap pools in response to price movements or volatility signals. Because pool definitions are offchain, this activity is gasless until execution, enabling high-frequency strategy updates without incurring prohibitive cost.

Peer-to-Peer Lending

Lopswap can be used as a foundational layer for non-custodial lending mechanisms. In this model, a borrower locks collateral into a smart contract and requests a loan in a coin (e.g., USDC) via a matching Lopswap pool. The lender defines the terms (amount, rate, duration, etc.) in a signed offchain order. Once matched, the lender's funds are transferred directly from their wallet to the borrower, while the collateral remains locked until repayment or liquidation. This setup enables decentralized, capital-efficient lending where liquidity providers retain full control over their assets until the loan is executed, with no need to pre-fund a shared lending pool.

Non-AMM Liquidity Provision with Controlled Pricing

A liquidity provider wants to offer swap liquidity between ETH and USDC, but without the price exposure or impermanent loss associated with AMMs. Through Lopswap, they can define symmetric limit orders with fixed exchange rates and earn a fee only when their conditions are met, ensuring predictable outcomes and deterministic risk.

Composable Multi-Strategy Portfolios

A yield optimization engine wants to diversify risk by deploying a single asset across multiple protocols. It may allocate a portion of a user's funds to lending while simultaneously exposing the same tokens to execution via AMM-like (even several different AMM-like), allowing either stream to activate based on profitability and availability without requiring fund transfers between strategies.

3.3 Competitive Advantages

Lopswap redefines liquidity provisioning by combining the flexibility of offchain architecture with the security of onchain execution. Its design introduces multiple technical and practical advantages over traditional DeFi protocols:

- **Non-Custodial by Default:** Liquidity always remains in the user's wallet until the exact moment of execution. There is no need to pre-deposit or stake assets in a smart contract. This eliminates custodial risk and ensures full capital availability at all times.
- **Gasless Pool Creation:** All pool definitions are created and signed offchain via EIP-712 messages. No onchain transaction is required to publish or offer liquidity. Execution only incurs gas costs at the time of actual settlement. While cancellation or replacement of active orders may require a transaction or token movement, initial deployment and reconfiguration remain offchain and cost-efficient.
- **Balance-Aware Execution:** Lopswap allows users to define exactly how much liquidity they want to offer independently of their full wallet balance. The protocol does not reserve or lock funds: it simply checks the available balance at execution time. If the user's wallet holds less than the defined pool amount at that moment, the order remains valid and is partially fillable up to the available amount. This gives users fine-grained control over exposure and ensures pools remain usable even as balances fluctuate.
- **Instant Yield Realization:** Rewards (fees or payouts) are delivered directly to the liquidity provider's wallet (or their defined receiver) upon execution, with no need for claiming, staking, or compounding processes. This simplifies user experience and improves transparency.

- **Capital Reuse and Composability:** The same tokens can be allocated across multiple pools simultaneously, without conflict. Available balances are checked at execution time, enabling parallel strategies and more efficient capital deployment.
- **Full User Control and Revocability:** Users maintain complete authority over their liquidity at all times. Pools can be invalidated by explicitly cancelling them, modifying parameters, or simply transferring the relevant tokens out of the wallet. There is no lock-in: liquidity remains under user control and can be withdrawn, updated, or reassigned at any moment.
- **Multi-Chain Compatibility:** Lopswap is compatible with any EVM network supported by the 1inch Limit Order Protocol, enabling cross-chain liquidity provisioning through a unified interface.
- **Programmable Liquidity:** Custom logic can be embedded via pool extensions and traits, allowing the creation of time-based strategies, price ranges, auction formats, and more without requiring protocol changes or governance intervention.
- **Secure Execution Layer:** Execution is powered by the audited and widely used 1inch Limit Order Protocol, providing trustless settlement with proven reliability and performance.

4 Protocol Mechanics

Lopswap operates through a minimal offchain-onchain interaction model that maximizes flexibility and capital efficiency while preserving full user custody. Liquidity provisioning is defined entirely offchain and becomes active only upon matched execution. The system relies on cryptographic signatures (EIP-712), decentralized order propagation, and secure onchain settlement via the 1inch Limit Order Protocol.

4.1 Lifecycle Overview

The lifecycle of a liquidity pool on Lopswap consists of the following stages:

1. **Declaration:**

   The user defines a liquidity pool by specifying parameters such as tokens, amounts, fee, fee receiver, expiration, and others. This data is encoded in an EIP-712 message and signed with the user's wallet. No onchain transaction is required. The signed order is then broadcast to offchain relayers or aggregators.

   For execution to succeed later, the user must approve the relevant token(s) to the 1inch Router contract either in advance via a standard `approve` transaction, or inline using `permit`[6] / `Permit2`[7] if supported by the token.

2. **Execution:**

   A counterparty (e.g., a trader or aggregator) finds the order and submits it to the onchain execution layer to the 1inch Limit Order Protocol. At this point, the tokens are transferred directly from the user's wallet to the counterparty, and the order is validated and settled onchain.

3. **Completion:**

   The user receives fees or payouts immediately, directly into their wallet. No staking, claiming, or interaction with reward contracts is needed. Before final settlement, all pool conditions are enforced onchain — including token amounts, validation rules, expiration, and recipient logic. The protocol ensures that the correct assets are received and transferred as defined by the original order. The pool may remain active and reusable (if partially filled), or expire based on the defined parameters.

4. **Modification and Revocation:**

   Pools can be invalidated or modified at any time. This can be done by submitting a cancellation transaction, broadcasting an invalidation signature, or simply moving the relevant tokens out of the wallet. Orders remain valid even if the wallet balance drops below the originally defined amount in such cases, only the available portion will be fillable during execution.

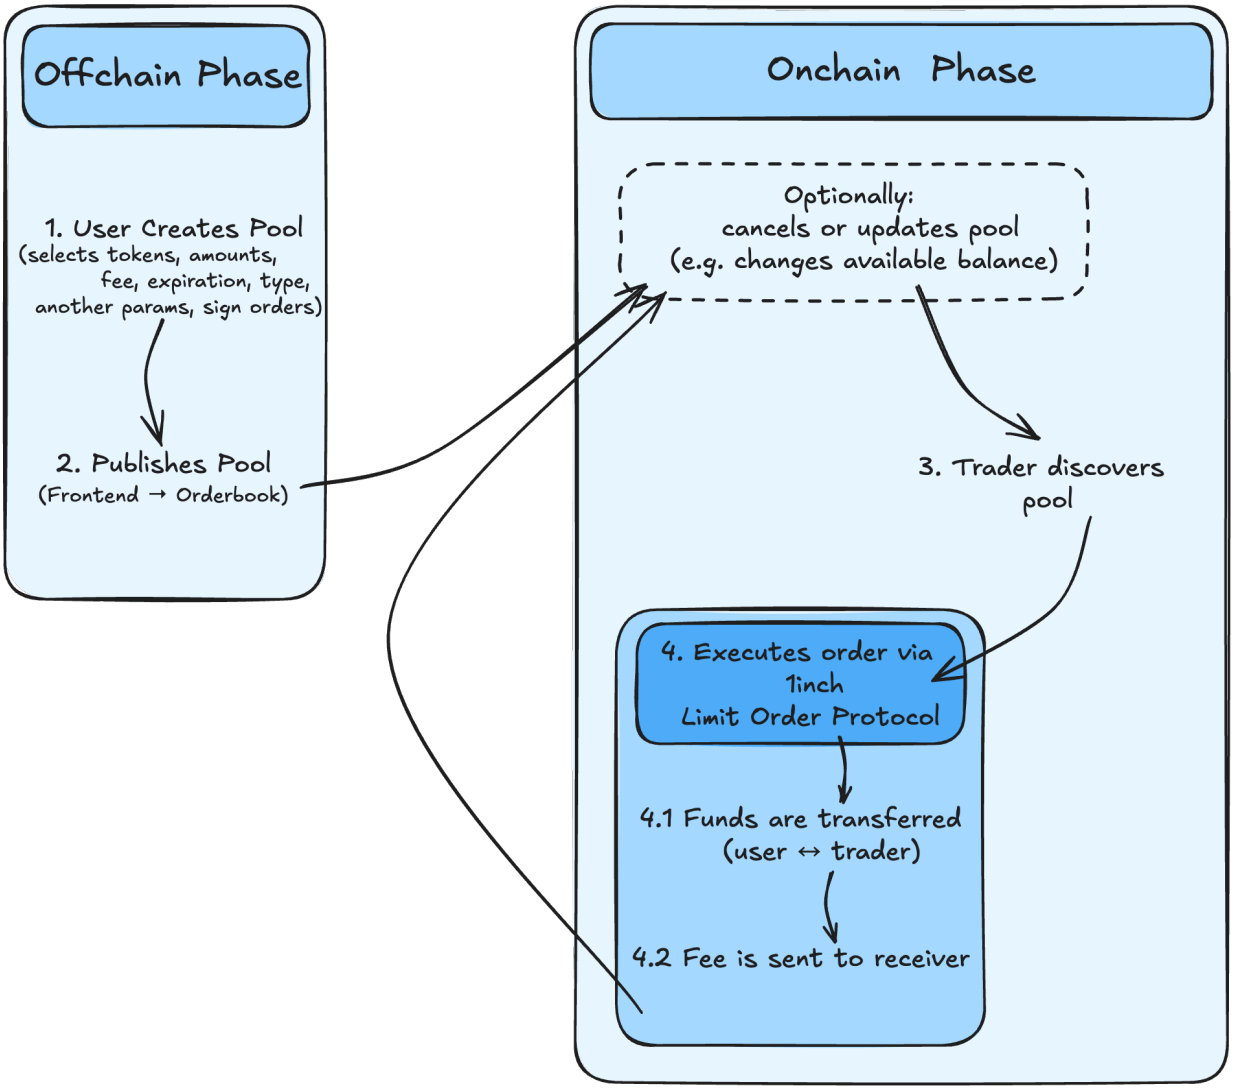


Figure 1: Lifecycle of Liquidity Pool in Lopswap

4.2 Pools & Multi-Pools

Each Lopswap pool represents a standalone offchain order, signed by the liquidity provider. It defines the terms under which a specific token amount can be used by a counterparty. Pools do not lock or reserve funds and rely on real-time balance checks at execution. While the order definition is immutable once signed, the pool's effective availability may change dynamically. For example, due to balance updates or strategy-specific state like AMM price curves.

Unlike traditional DeFi protocols, Lopswap allows users to create and maintain multiple overlapping pools using the same tokens. These pools may differ in pricing, time constraints, traits, or counterparty logic. Because balance checks are performed at execution time, tokens can simultaneously participate in multiple strategies without conflict.

- A user may create three separate pools with USDC: one for AMM arbitrage, one for lending, and one for private OTC offers - all using the same USDC balance.

  That is, the very same wallet-held USDC tokens - for example, the user's USDC can support multiple liquidity pools at once. These pools coexist offchain, and at execution time, each can draw from the same balance, subject to availability. If one pool partially consumes the tokens, the others automatically adjust to the reduced

remaining user balance. This dynamic allocation allows for simultaneous strategies without duplicating, splitting, or pre-committing capital.

- When any pool is matched and executed, only the available balance is used. Other pools remain active and automatically adjust their fillable volume based on the user's current wallet balance at execution time.
- This architecture enables partial fills, strategy layering, and conditional capital exposure without needing to split or move tokens.

Multi-pool composability is one of Lopswap's core advantages, allowing capital to remain idle-efficient, self-custodied, and dynamically allocated.

4.3 Custom Pool Types

Lopswap allows liquidity pools to express advanced behavior through optional flags, traits, and embedded data. All defined offchain and enforced during execution. These customizations extend the core pool format and enable specialized strategies without modifying the protocol's onchain contracts. Execution logic remains trustless and consistent, with all validations performed atomically within the 1inch Limit Order Protocol.

- **Whitelisted Counterparties:** Restrict execution to a specific set of addresses. For example, a known market maker, DAO multisig, or OTC partner.
- **Amount-Limited Pools:** Restrict execution to specific minimum or maximum fillable amounts. Useful for ensuring partial fills exceed a certain threshold, or for limiting total exposure per transaction.
- **Price-Bounded Pools:** Include a minimum or maximum exchange rate at which the order can be executed, enabling simple AMM or TWAP-like behavior.
- **Time-Locked Pools:** Enforce a minimum delay before the pool can be filled, or restrict execution to a specific time window (e.g., for batch auctions or future-timed orders).
- **Expiration Rules:** Define a maximum validity period for the pool. After the expiration timestamp, the order becomes unfillable and is automatically rejected during execution.
- **One-Time Fill or Auto-Cancel:** Mark pools as disposable after the first fill attempt or after partial execution.
- **Custom Fee Logic:** Encode dynamic fee behavior, alternative reward receivers, or conditional incentives. For example, redirecting a portion of fees to referrers or treasury.
- **Pool Metadata Extensions:** Include arbitrary payloads for offchain indexing, analytics, or frontend display without affecting settlement logic.

These extensions make Lopswap suitable for a wide range of applications, from AMMs and private liquidity to algorithmic execution and DAO-governed liquidity programs.

4.4 Custom Execution Models

Lopswap is designed to support a wide variety of liquidity models and strategies. Instead of enforcing a fixed behavior for all pools, it provides a universal framework in which diverse execution logics can be implemented on top of the same order format.

Each pool is defined offchain as an EIP-712 message, and its meaning such as pricing, conditions, or strategy is interpreted by external resolvers or smart contracts during execution. This design enables the creation of custom pool types with arbitrary logic, without requiring changes to the core protocol.

Examples of execution models that can be realized within Lopswap:

- **Lending Pools:** A borrower locks collateral in a separate contract, and tokens are provided directly from the liquidity provider's wallet, with repayments and interest settled later.
- **Flashloan Pools:** Tokens are lent out and returned atomically within the same transaction, with the protocol ensuring repayment and fee delivery.
- **AMM-like Pools:** Offchain logic can emulate AMM behavior by dynamically adjusting taker amounts based on price curves or oracle data.
- **Auction or TWAP Pools:** Pool conditions evolve over time. For example, gradually lowering price, unlocking liquidity in steps, or enabling execution only after a target time.

- **Strategy-Specific Pools:** Execution may depend on external factors — such as price triggers, governance signals, or resolver identity.

- **Conditional Access Pools:** Restrict execution based on external ownership or identity. For example, only users holding a specific NFT, governance token, or address type may use the pool. Useful for gated liquidity, DAO-controlled access, or private deals.

- **Reflexive Pools:** Modify behavior dynamically based on historical fills or state such as increasing the fee or price after each execution. Enables bonding curve mechanics, adaptive pricing, or capped participation models.

- **Dynamic Fee Pools:** Calculate the maker's reward or protocol fee based on market conditions at the time of execution. For example, higher fees during volatility or delayed fills. Allows for performance-based incentives or congestion pricing.

- **Time-Drip Pools:** Gradually unlock liquidity over time. For instance, releasing a fixed amount every hour or day. Suitable for continuous token sales, scheduled auctions, or streaming incentives.

- **Option-Like Pools:** Orders that can only be executed under specific market conditions such as price crossing a threshold or volatility reaching a target. These pools enable option-style behavior and can be used as a primitive for building simple onchain derivatives.

These custom execution models are not limited by the protocol itself, but can be developed and operated independently using shared infrastructure. This makes Lopswap a flexible foundation for programmable liquidity and adaptable to new use cases, strategies, and applications over time.

5 Architecture & Components

5.1 System Diagram

Lopswap separates liquidity declaration, discovery, and execution into distinct layers, enabling a modular and gas-efficient architecture.

- **User Wallet:** Holds the actual tokens. Users sign EIP-712 orders to define pools. Tokens remain fully in custody of the user until execution.

- **Frontend Interface:** Enables users to create, manage, and browse liquidity pools and treir states. The interface generates orders, tracks statuses, and integrates with wallet providers.

- **Offchain Layer:** Responsible for broadcasting signed orders to relayers, aggregators, or peer-to-peer channels. No trust is assumed, execution only happens onchain.

- **Resolvers:** External actors (bots, scripts, or protocols) that observe orders, match them with takers, and execute them via the 1inch Limit Order Protocol.

- **Execution Layer:** Settlement is performed onchain through the audited 1inch contracts. Orders are filled atomically, based on live wallet balances and declared terms.

This separation of responsibilities makes Lopswap highly composable and suitable for advanced strategies without introducing custody or gas overhead at declaration time.

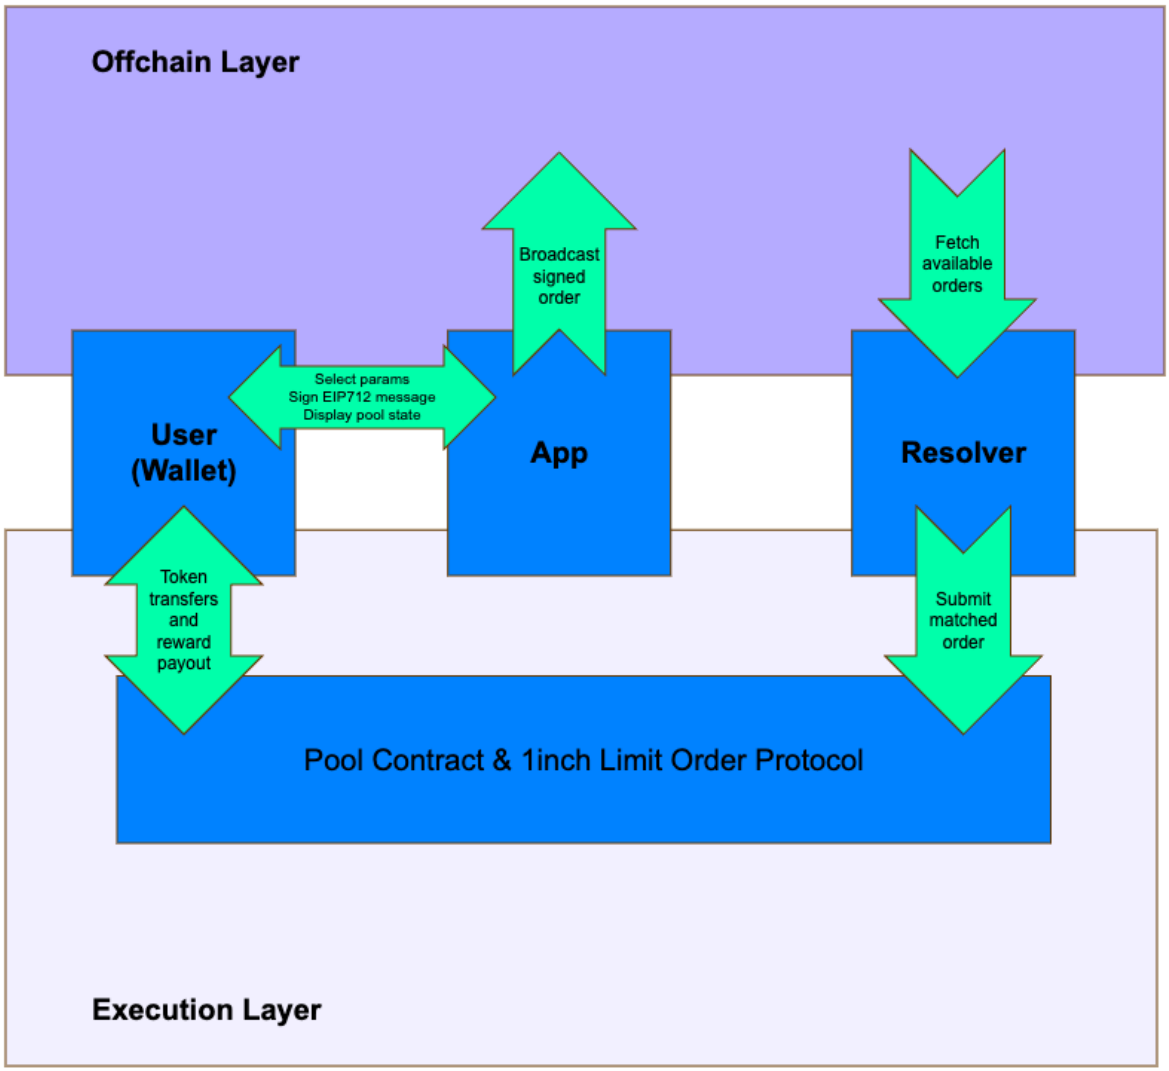


Figure 2: System Diagram

5.2 Technical Design

Lopswap is built around the principle of offchain liquidity declaration and onchain execution. It leverages standard cryptographic primitives and existing DeFi infrastructure to deliver a non-custodial, modular protocol.

This design enables Lopswap to operate in a highly flexible and decentralized manner, supporting a wide range of liquidity strategies without requiring users to sacrifice control, capital availability, or security.

EIP-712 Offchain Orders

Liquidity pools are defined as signed messages conforming to the EIP-712 structured data standard. This enables gasless creation, high performance, and compatibility with existing wallets and aggregators.

1inch Limit Order Protocol Integration

Execution is performed through the audited and battle-tested 1inch Limit Order Protocol, ensuring minimal trust assumptions and maximum compatibility with existing DeFi tooling.

Resolver-Based Architecture

Order discovery and submission are decoupled. Third-party resolvers (bots or scripts) can monitor offchain orders and trigger execution based on their own criteria or strategies.

Real-Time Wallet Balance Validation

Pools are fillable only if the wallet contains sufficient tokens at the time of execution. This avoids lockups while supporting dynamic token availability.

Composable and Extensible Traits

Pool behavior is controlled via a set of traits embedded in the order structure including fees, expirations, permitted takers, dynamic pricing rules, oracles, and more.

Permit / Permit2 Support

Token approvals can be embedded in execution, removing the need for prior `approve` transactions when supported by the token.

No Centralized Indexer Required

While relayers or aggregators can broadcast and store orders, Lopswap does not rely on any specific backend. Orders can be passed peer-to-peer, posted to public mempools, or integrated with external discovery layers.

5.3 Security Considerations

Lopswap is designed to minimize custodial, executional, and systemic risks by leveraging proven infrastructure and strict separation of responsibilities.

By combining audited infrastructure, offchain composability, and strict wallet-bound execution, Lopswap ensures a high degree of safety and reliability for liquidity providers and takers alike.

Non-Custodial by Design

At no point does the protocol take control over user funds. Tokens remain in the user's wallet until the exact moment of execution, enforced by the 1inch smart contracts.

Trusted Execution Path

Settlement occurs exclusively through the audited 1inch Limit Order Protocol, which guarantees atomic execution and transparent token flows between parties.

Balance-Aware Execution

Execution logic validates that the user holds a sufficient balance at the time of transaction. If not, the order cannot be filled eliminating failed settlements or misused liquidity.

Offchain Signature Verification

Orders are created offchain and verified onchain via EIP-712. This ensures cryptographic integrity and prevents tampering or replay attacks.

Revocable Orders

Pools can be cancelled or invalidated by the user at any time using cancellation signatures, onchain revocation, or simply moving funds. This provides full control and safety against stale or unwanted orders.

Permit-Based Approvals

Where supported, token allowances can be embedded via permit / Permit2 reducing approval surface and eliminating unnecessary approval risks.

Composable but Isolated Logic

Advanced pool behaviors are implemented offchain or encoded in the order structure. Malicious or faulty logic cannot compromise execution, as only stateless signed messages are accepted.

5.4 Comparative Analysis

The following tables present a comparative overview of Lopswap's architecture and liquidity model in contrast to existing DeFi solutions including AMMs, lending protocols, and emerging intent-based systems. Key aspects such as custody, capital efficiency, flexibility, and composability are highlighted to illustrate the advantages of Lopswap's offchain pool mechanism.

Feature	Lopswap	Uniswap / Balancer	0x / Compound / Yearn
Asset Custody	Non-custodial (wallet)	Custodial (pool)	Custodial (protocol/vault)
Execution Model	Offchain order + onchain fill	Onchain AMM / weighted swap	Offchain book / onchain logic
Withdrawal Flexibility	Full (any time)	Requires exit txn	Strategy/transaction-dependent
Pool Creation Cost	Zero (offchain)	High (gas for deploy)	High

Table 1: Architecture and fund control comparison

Feature	Lopswap	Uniswap / Balancer	0x / Compound / Yearn
Yield Model	Instant yield on execution	Fees / weights	Spread / lending / strategies
Capital Reuse	Yes (multi-pool use)	No / Limited	No
Strategy Flexibility	High (traits/extension)	Medium (ranges/weights)	Low–High (by type)
User Complexity	Low	Medium–High	Medium–High

Table 2: Yield, flexibility and UX comparison

6 Token & Incentives (Future Consideration)

Lopswap currently operates without a native token. All liquidity flows, rewards, and interactions are handled directly via offchain orders and existing protocol integrations.

The protocol's architecture, however, allows for the future introduction of incentive mechanisms or governance coordination through a native token if needed. Such mechanisms may include liquidity mining, fee rebates, or DAO-driven governance. All without altering the non-custodial foundation of Lopswap.

7 Integration Options

Lopswap enables seamless integration of offchain liquidity pools into a wide range of third-party systems from consumer wallets to institutional platforms.

DeFi Wallets

Lopswap pools can be created and signed directly within wallet interfaces. MetaMask and WalletConnect offer native signing support for EIP-712 messages, while Safe (ex-Gnosis) allows DAOs and treasuries to originate multisig-authorized pools. Hardware wallets such as Ledger and Trezor are also supported, enabling secure offchain participation without transferring assets.

DEX Platforms and Aggregators

Lopswap orders can be surfaced inside decentralized exchange frontends and aggregators. For example, the 1inch UI can route through Lopswap pools as additional sources of liquidity. Other platforms like 0x or Paraswap can integrate via standard API bridges. Relayers and resolvers can also independently discover, index, and broadcast available orders to maximize fill efficiency.

Strategy Engines and Vaults

Protocols such as Yearn may incorporate Lopswap into automated yield strategies using offchain pools as composable building blocks. Bots can dynamically create and update pools based on market conditions, token balances, or price feeds. More advanced use cases include TWAP execution, conditional fills based on volatility thresholds, or streaming-based strategies.

Institutional and Custom Integrations

Lopswap supports institutional workflows via custom frontends, private liquidity layers, and execution dashboards. OTC desks and L2 hubs may integrate private orderbooks and define tailored fill conditions. Risk analytics platforms can access Lopswap data to measure yield performance, slippage, and systemic exposure across time.

8 Conclusion

Lopswap introduces a fundamentally new approach to liquidity provisioning in DeFi — one that restores user control, reduces overhead, and unlocks flexible and scalable liquidity. By separation liquidity from custody and execution, it establishes a modular, wallet-native liquidity layer designed to serve both individual users and integrated protocols.

References

[1] Liquidity lockup in dex. `https://www.nadcab.com/blog/liquidity-lockup-in-dex`. Explains how LPs lose flexibility due to lockups in decentralized exchanges.

[2] Liquidity fragmentation on decentralized exchanges. `https://arxiv.org/html/2307.13772v5`. Discusses liquidity fragmentation and inefficiencies in DeFi.

[3] 1inch limit order protocol documentation. `https://portal.1inch.dev/documentation/contracts/limit-order-protocol/limit-order-introduction`.

[4] 1inch limit order protocol source code. `https://github.com/1inch/limit-order-protocol`.

[5] Eip-712: Typed structured data hashing and signing. `https://eips.ethereum.org/EIPS/eip-712`.

[6] Eip-2612: Permit extension for eip-20 signed approvals. `https://eips.ethereum.org/EIPS/eip-2612`.

[7] Introducing permit2. `https://blog.uniswap.org/permit2-and-universal-router`.