

CollaFuse: Collaborative Diffusion Models

Simeon Allmendinger^{*1,2,3}, Dominique Zipperling^{*1,2,3}, Lukas Struppek^{4,5}, and Niklas Kühl^{1,2,3}

¹University of Bayreuth

²Fraunhofer FIT

³FIM Research Center for Information Management

⁴Technical University of Darmstadt

⁵German Research Center for Artificial Intelligence (DFKI)
{simeon.allmendinger,domenique.zipperling}@uni-bayreuth.de

Abstract

In the landscape of generative artificial intelligence, diffusion-based models have emerged as a promising method for generating synthetic images. However, the application of diffusion models poses numerous challenges, particularly concerning data availability, computational requirements, and privacy. Traditional approaches to address these shortcomings, like federated learning, often impose significant computational burdens on individual clients, especially those with constrained resources. In response to these challenges, we introduce the novel approach CollaFuse for distributed collaborative diffusion models inspired by split learning. Our approach facilitates collaborative training of diffusion models while alleviating client computational burdens during image synthesis. This reduced computational burden is achieved by retaining data and computationally inexpensive processes locally at each client while outsourcing the computationally expensive processes to shared, more efficient server resources. Through experiments on the common datasets CelebA, CIFAR-10, and Animals-with-Attributes2, our approach demonstrates enhanced performance while decreasing information disclosure as it reduces the necessity for sharing raw data. These capabilities hold significant potential across various application areas, including the design of edge computing solutions. Thus, our work advances distributed machine learning by contributing to the evolution of collaborative diffusion models.

1 Introduction

Generative artificial intelligence (GenAI) methods exhibit astonishing results in generating images, among other modalities like music [35] and video [52, 3] with promis-

ing applications in areas like healthcare [58] to help reduce biases [43]. Recent computer vision advancements primarily rely on diffusion models [21, 55] that generate synthetic images from random noise through iterative denoising steps. We formally introduce diffusion models and related work in Sec. 2.1. In contrast to more traditional approaches [27, 15], diffusion models excel in providing high sample quality and strong mode coverage [26, 39, 7]. However, the strides in GenAI require large amounts of data, and the generation process itself is computationally expensive due to the multiple required denoising steps.

While large companies possess the necessary data and computational resources for training diffusion models, smaller organizations and private clients may face challenges in providing the required resources, limiting their ability to train and implement recent GenAI models [67]. This might lead to high dependency on a few key players and even prevent the application of such models completely due to local data protection regulations. For example, the popular Stable Diffusion v2 has been trained on 256 A100 GPUs for about 200,000 hours [44]. But even smaller models still set notably high hardware and data requirements.

To address data and resource availability constraints, organizations and clients can join forces to train machine learning models collaboratively with other clients in a decentralized way. A prominent representative of collaborative training is federated learning [36]. Conceptually, each client trains an individual model locally on their private data. After several training steps, the model parameters are sent to the server to build a global model by aggregating the individual weights. The server distributed this global model back to all clients. As the necessity for each client to train and share an entire model remains, high computational resources for each client are entailed [60]. Furthermore, in addition to privacy risk from the generative GenAI models in general [19], federated learning introduces new potential privacy risks [51, 69].

^{*}Equal contribution.

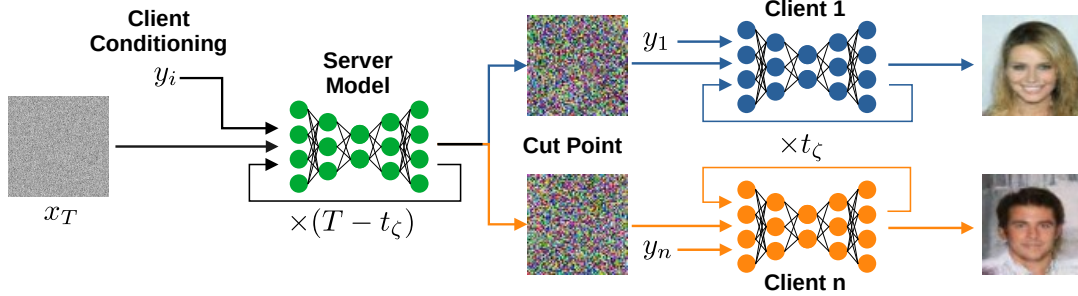


Figure 1: Overview of CollaFuse for collaborative image synthesis by splitting the denoising process between the server and clients. Based on client-specific conditioning y_i , the first $T - t_\zeta$ denoising steps are run on a trusted server model, while the remaining t_ζ denoising steps are run locally by the i -th client. Thereby, external computing resources can be utilized while keeping the clients’ raw data private.

As an alternative learning paradigm, split learning [16] supports collaborative model training by splitting the model into server-side and client-side components. In the conventional split learning setup, clients share only intermediate network activations with the server side, where the final computations are performed. Unlike federated learning, split learning reduces the computational load on clients and enhances privacy protection by sharing only intermediate representations instead of raw data or model weights [9]. We provide an overview of collaborative training for generative models in Sec. 2.2. Our analysis reveals that current approaches rely mostly on federated learning. By not utilizing split learning with diffusion models, they overlook the privacy and resource benefits of split learning, especially from the clients’ perspective.

Our Approach: In addressing the challenges posed by the data, computation, and privacy requirements of diffusion-based GenAI, we present our collaborative diffusion models in Sec. 3. We introduce the novel collaborative learning and inference approach **CollaFuse** tailored specifically for diffusion models. Drawing inspiration from the split learning framework, our approach divides the iterative denoising steps of diffusion models into two components. The computation of the initial denoising steps is carried out by a shared model on a server, with limited information disclosure due to the inherent noise in the training data and intermediate generated samples. Subsequently, the client’s model then performs the remaining denoising steps, which are usually significantly fewer than the denoising steps on the server side. **CollaFuse** also allows for personalized image conditioning by incorporating attribute labels during the generation. Our empirical results demonstrate that our collaborative diffusion approach improves the image quality compared to a setting where each client trains its own local diffusion model. By sharing a server model that performs most of the computationally heavy denoising steps, the computational burdens for each client are comparably small. At the same time,

clients can better approximate their individual data distribution, which enables them to generate better characteristic features. Beyond these performance improvements, we also conduct dedicated privacy analyses, including attribute inference [13] and inversion attack [12] experiments, to quantify information disclosure at different collaboration cut points. This allows us to empirically evaluate how collaborative diffusion can balance image fidelity with privacy protection.

The proportion of denoising steps carried out on the server and client sides, respectively, is controlled by a single parameter called the cut point. The higher the cut point, the more steps are computed on the client side. Whereas our approach is in principle also applicable to other diffusion model architectures, we focus our experiments in Sec. 4 on the common Denoising Diffusion Probabilistic Models (DDPM) [21] and Latent Diffusion Models (LDMs) [44]. In summary, we make the following contributions:

1. We introduce the first collaborative diffusion model **CollaFuse**, which consists of a shared server component trained by multiple clients without revealing their original training data to other clients or the server.
2. **CollaFuse** allows clients to outsource most of their computationally expensive denoising steps during training and inference to a shared server model.
3. **CollaFuse** improves the image quality compared to the setting where each client trains a local diffusion model on its own data.

2 Background and Related Work

We start by introducing diffusion models for generative image synthesis. We further describe related distributed collaborative machine learning approaches, such as federated and split learning, and their utilization for image synthesis or generative AI more generally.

2.1 Diffusion Models

The Denoising Diffusion Probabilistic Models (DDPMs) [21] mark a significant advancement in generative image synthesis consisting of a diffusion and denoising process. The diffusion process is a Markov chain with T timesteps that transforms a training image x_0 to a noisy image x_T that follows a random Gaussian distribution. The diffusion process of an image x_t at time step t is mathematically defined as

$$x_t = \sqrt{\alpha_t}x_{t-1} + \sqrt{1 - \alpha_t}\epsilon, \text{ with } t = 1, \dots, T. \quad (1)$$

Here, α_t denotes the variance schedule, and ϵ is the added Gaussian noise. A denoising network $\epsilon_\theta(x_t, t)$ with parameters θ is then trained to reverse the diffusion process and predict the noise added to the sample x_t during time step t . Most denoising networks are built upon the common U-Net [45] architecture. With the denoising network, the image generation process, which iteratively removes the predicted noise $\epsilon_\theta(x_t, t)$ from the noisy sample x_t , can be defined as

$$x_{t-1} = \frac{1}{\sqrt{\alpha_t}} \left(x_t - \frac{1 - \alpha_t}{\sqrt{1 - \alpha_t}} \epsilon_\theta(x_t, t) \right) \quad (2)$$

with $\bar{\alpha}_t = \prod_{s=1}^t \alpha_s$. Based on the idea of Markov chains, the distribution of the intermediate noise predictions in the denoising process $p_\theta(\cdot)$ is defined by

$$p_\theta(x_{0:T}) = p(x_T) \cdot \prod_{t=1}^T p_\theta(x_{t-1}|x_t) \quad (3)$$

with $p(x_T) = \mathcal{N}(x_T; \mathbf{0}, \mathbf{I})$. In DDPMs, the iterative application of U-Nets across T timesteps is a fundamental characteristic, enabling the model to refine noisy data into structured outputs progressively. The Imagen model [47], as one of the most recognized text-conditioned diffusion models in the community, builds upon DDPMs. The authors employ a frozen text encoder and dynamic thresholding to generate photorealistic images conditioned by the text prompt y . The loss function of DDPMs is expressed by

$$\mathcal{L} = \sum_{t=1}^T \|\epsilon_\theta(x_t, t, y) - \epsilon\|_2^2. \quad (4)$$

The Imagen model additionally adds a guidance weight ω_t , which is integral to the denoising process. This guidance weight modulates the influence of the predicted noise $\epsilon_\theta(x_t, t, y)$ at each timestep t , enabling precise control over the image generation process, particularly in maintaining fidelity to the target distribution. For simplicity, we leave the explicit embedding process out of our notation and implicitly assume that all text labels have already been embedded before feeding the embeddings into the U-Net $\epsilon_\theta(\cdot)$.

LDMs [44] extend DDPMs to the latent space of image representations, enhancing computational efficiency and scalability [44]. By applying the diffusion process in a lower-dimensional latent space, LDMs generate high-quality images with less computational overhead. Autoencoders encode images into latent representations, where denoising occurs, and then reconstruct the final image.

2.2 Collaborative Learning in Generative AI

Collaborative learning has become an essential paradigm for training models on distributed data while preserving privacy and reducing local computational costs. It enables multiple clients to jointly optimize model parameters without sharing raw data, forming the basis for methods such as federated and split learning.

Collaborative learning: Federated learning (FL) [36] and split learning (SL) [16] are among the most prominent approaches for training machine learning models collaboratively on distributed data sources. FL utilizes distributed data, with clients independently training models on their unique datasets. These models are subsequently shared, aggregated, and redistributed. The cycle repeats until the models converge. Conversely, SL divides a model among clients and a central server, decreasing the computational load on clients. Moreover, clients have the option to use FL for model aggregation, leading to the development of SplitFed learning [60]. These techniques have found applications in diverse fields such as the automotive industry [49], energy management [48], and healthcare [24], where they are combined with both discriminative [38] and generative AI approaches [50].

Collaborative learning in generative AI: Especially for image synthesis, FL and SL possess potential owing to the extensive volume of data involved. Before diffusion models took over as the predominant architecture for image synthesis, *Generative Adversarial Networks (GANs)* [15] represented the most widely used generative architecture. GANs are composed of two components: a generator for synthesizing images and a discriminator trained to distinguish between real and synthetic images. Existing research on collaborative training of GANs demonstrates different ways to integrate these two components within the FL process. Hardy et al. [17] introduced FL-GAN, adopting the standard FL procedure for both discriminator and generator. This vanilla approach was compared to MD-GAN, where FL is applied only to the discriminator, while the generator is trained directly by a central server. Building upon this foundation, Fan and Liu [10] empirically analyzed several strategies for synchronizing discriminators and generators across clients, demonstrating that the best results are achieved when synchronizing both components jointly. Li et al. [31] improved FL-GANs by employing maximum mean discrepancy for generator up-

dates, while more recent work addresses heterogeneity issues [34, 68]. Because FL places substantial strain on computational and communication resources, new methods have been developed to alleviate these burdens. Lai et al. [30] proposed an on-demand, quantized, energy-efficient federated diffusion approach to enhance the training efficiency of generative AI models in mobile edge networks by dynamically adjusting quantization, reducing energy and communication consumption while preserving data quality and diversity.

In addition, several studies focus on improving privacy in FL-GANs. Augenstein et al. [1] proposed a differentially private federated GAN framework, while Veeraragavan and Nygård [62] combined consortium blockchains with an efficient secret sharing algorithm to address trust-related weaknesses in existing solutions. Beyond FL, GANs have also been collaboratively trained using SL [11]. Although not explicitly focused on distributed learning, Ohta and Nishio [40] presented a privacy-preserving SL approach for GANs that could be extended to collaborative learning. Other work combines both paradigms, known as SplitFed learning, to leverage the strengths of each [28, 66].

While these studies demonstrate the feasibility of collaborative learning for GAN-based architectures, their direct transfer to diffusion models remains challenging. Diffusion models rely on iterative denoising and stochastic sampling processes that are computationally intensive and require consistent synchronization of parameters over thousands of steps. These characteristics complicate straightforward adaptation of existing FL and SL schemes, motivating the development of new collaborative frameworks tailored to diffusion-based generative models.

Collaborative learning of diffusion models: In the domain of diffusion models, research on collaborative training methods is still scarce. Jothiraj and Mashhadi [25] made a first step and introduced the Phoenix technique for training unconditional diffusion models in a horizontal FL setting. Their objective is to address mode coverage issues often seen in distributed datasets that are not independent and identically distributed. Their data-sharing approach boosts performance by sharing only 4-5% of the data among clients, minimizing communication overhead. Personalization and threshold filtering techniques outperform comparison methods in terms of precision and recall, but fall short in image quality compared to the proposed technique. The paper suggests further exploration to enhance image quality in future work. Song et al. [54] proposed enhancing FL with knowledge distillation by dynamically adjusting distillation weights, using data generated by a collaboratively trained diffusion model (FedAvg), thus addressing data heterogeneity and preserving privacy by eliminating the need for public datasets.

Moreover, the potential of FL for AI-generated content, especially for DDPMs, was demonstrated by Huang et al.

[23]. The authors discuss three different approaches for diffusion models in FL settings. A parallel approach mimicking the conventional FL. A separate split approach combines FL with SL. As a third solution, the authors discussed a sequential approach in which one client receives the current model from the server, trains the model on its data, and then transmits the current version to the next client. The trained model returns to the server only after every client has trained the model once. Based on the sequential FL, a LoRA-based [22] federated fine-tuning scheme is designed and examined in more detail, demonstrating the advantages of faster convergence time and reduced memory consumption during the tuning process. Further, de Goede et al. [6] adapt the federated averaging algorithm for training DDPMs. Mendieta et al. [37] trained diffusion models with one-shot FL under provable privacy budgets with differential privacy.

By mainly focusing on FL for GANs [32], current literature has neglected the benefits of different collaborative paradigms and GenAI architectures so far. Combining DDPMs and SL promises various benefits, including reducing local resource requirements and increasing data privacy. Huang et al. [23] is the only identified study utilizing SL for diffusion models. However, it combines SL with FL, which increases privacy risks compared to a standard SL approach, as client models are still shared. Moreover, it overlooks the impact of model split configuration on factors such as performance. Our proposed approach for distributed collaborative image synthesis with diffusion models taps into these advantages and combines the research areas of diffusion models and collaborative learning. Focusing exclusively on split learning mitigates privacy risks by sharing only intermediate results. Additionally, we treat the model split configuration—determining how much of the model resides with clients—as a hyperparameter and analyze its impact.

3 Collaborative Diffusion Models

We now formally introduce our novel approach CollaFuse for enabling collaborative image generation with diffusion models. In our setting, a certain number k of clients $c \in C = \{c_1, c_2, \dots, c_k\}$ wants to collaboratively train a diffusion model for image synthesis. Although we assume that each client has a dataset from a similar domain, e.g., facial images, the specific feature distribution may differ. To stay with the facial image example, client A may have a dataset of facial images with eyeglasses, whereas client B’s dataset consists only of faces without eyeglasses. All clients now want to train a shared U-Net ϵ_θ^S on the server that is available to each client and computes the initial denoising steps. Additionally, each client $c \in C$ trains an individual U-Net ϵ_θ^c that is maintained locally and computes solely the remaining denoising steps. For notation simplicity, we assume that θ denotes the weights of each

Algorithm 1 Collaborative Training

Require: training dataset D ; batch size b ; number of time steps T , cut point t_ζ , batch size b , variance scheduler α , noise scheduler σ , clients C , server s

- 1: client dataset $D_c \subseteq D$
- 2: **while** Not Converged **do**
- 3: **for** $c \in C$ **do**
- 4: **for** Each batch $\{(x_0, y)\}^b \subseteq D_c$ **do**
- 5: *** CLIENT NODE ***
- 6: $t^c \sim \mathcal{U}[1, t_\zeta]^b$ and $t^s \sim \mathcal{U}[t_\zeta, T]^b$
- 7: $\epsilon^c \sim \mathcal{N}(0, \mathbf{I})$, $\epsilon^s \sim \mathcal{N}(0, \mathbf{I})$
- 8: $x_{t^c} \leftarrow \alpha(t^c) \cdot x_0 + \sigma(t^c) \cdot \epsilon^c$
- 9: $x_{t_\zeta} \leftarrow \alpha(t_\zeta) \cdot x_0 + \sigma(t_\zeta) \cdot \epsilon^c$
- 10: $x_{t^s} \leftarrow \alpha(t^s) \cdot x_{t_\zeta} + \sigma(t^s) \cdot \epsilon^s$
- 11: $\mathcal{L}_{t^c} = \omega_{t^c} \cdot \|\epsilon_{\theta^c}(x_{t^c}, t^c, y) - \epsilon^c\|_2^2$
- 12: Update θ^c
- 13: Pass x_{t^s} and ϵ^s to server s
- 14: *** SERVER NODE ***
- 15: $\mathcal{L}_{t^s} = \omega_{t^s} \cdot \|\epsilon_{\theta^s}(x_{t^s}, t^s, y) - \epsilon^s\|_2^2$
- 16: Update θ^s
- 17: **end for**
- 18: **end for**
- 19: **end while**

individual model, so there exist no shared weights between the client models and the server model.

The computational split between server and clients is manually set by the cut point $t_\zeta \in [0, T]$ that specifies the number of denoising steps performed on the client side after $T - t_\zeta$ steps were computed by the shared server model. The cut point is set as a hyperparameter and kept fixed during training and inference. For $t_\zeta = 0$, all denoising steps are computed by the server, which is trained on the joint set of all clients' data. For $t_\zeta = T$, each client trains an individual diffusion model on its data that performs all denoising steps without any shared server model. The approximated data distribution of our collaborative denoising approach is formalized in Equation (5) with $p(x_T) = \mathcal{N}(x_T; 0, \mathbf{I})$:

$$p_{\theta^s, \theta^c}(x_{0:T}) = p(x_T) \cdot \prod_{t=1}^{t_\zeta} p_{\theta^s}(x_{t-1}|x_{t_\zeta}) \cdot \prod_{t=t_\zeta}^T p_{\theta^c}(x_{t-1}|x_t) \quad (5)$$

Here, the first product operator describes the distribution approximated by the server model with weights θ^s , and the second product operator consequently defines the distribution approximated by the client model $\epsilon_{\theta^c}^c$.

Algorithm 2 Collaborative Inference

Require: number of time steps T , label y , cut point t_ζ , client c , server s

- 1: Sample initial noise: $x_T \sim \mathcal{N}(0, \mathbf{I})$
- 2: $M = \left\lfloor t_\zeta + \frac{t_\zeta}{T} \cdot (T - t_\zeta) \right\rfloor$
- 3: $t_{list}^c = \text{linearly spaced array generator}(1, M, t_\zeta)$
- 4: $t \leftarrow T$
- 5: **while** $t \geq 1$ **do**
- 6: **if** $t > t_\zeta$ **then**
- 7: Compute x_{t-1} using $\epsilon_{\theta^s}(x_t, t, y)$ and $\alpha(t), \sigma(t)$
- 8: **else**
- 9: Compute x_{t-1} using $\epsilon_{\theta^c}(x_t, t_{list}^c[t], y)$ and $\alpha(t_{list}^c[t]), \sigma(t_{list}^c[t])$
- 10: **end if**
- 11: $t \leftarrow t - 1$
- 12: **end while**

3.1 Collaborative Training

During training, client models $\epsilon_{\theta^c}^c$ and the server model $\epsilon_{\theta^s}^s$ are updated independently. Alg. 1 provides our collaborative training procedure in pseudocode, which we now describe in more detail. For training, each client $c \in C$ has access to a private dataset $D_c = \{(x_0^i, y^i)\}$ of images x_0^i with optional textual attribute labels y^i . In principle, our approach also works with unlabeled data and other kinds of labels, e.g., one-hot encoded label vectors and segmentation maps. However, we focus on the use case of attribute-conditioned image generation in this work. By using textual feature descriptions as labels, our implementation can easily be extended to more elaborate text-guided image synthesis. As for the standard diffusion training process, each client samples a training batch $\{(x_0, y)\}^b \subseteq D_c$ of batch size b together with client time steps $t^c \sim \mathcal{U}[1, t_\zeta]^b$ during each training step. Gaussian noise is added to each training sample based on t^c following the diffusion process defined in eq. (1). All noisy images are fed into the client's model to predict the added noise and update the model's parameters according to the loss function defined in eq. (4). In addition, each client uses the diffused image x_{t_ζ} from the cut point and samples additional server time steps $t^s \sim \mathcal{U}[t_\zeta, T]^b$ to provide the noisy images x_{t^s} for the server. The final noise image and the noise added to x_{t_ζ} are then used to update the server model's weights analogously. We note that the process of adding additional noise for the server could, in principle, also be performed on the server side. However, it is crucial to note that the server only has access to samples at the noise level of t_ζ and not the initial training samples to limit the amount of disclosed information shared with the server.

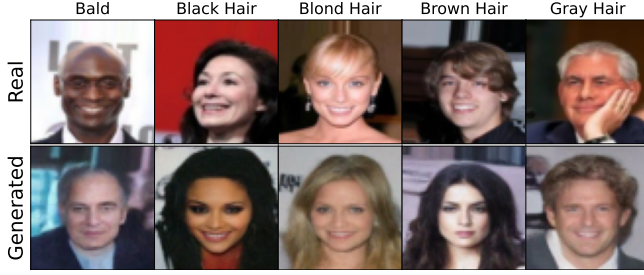


Figure 2: Comparison between random samples from the training set (top row) and images generated with our collaborative diffusion models trained with cut point $t_\zeta = 100$ (bottom row). Images were not cherry-picked and generated starting with the same initial noise. The results demonstrate that collaboratively training diffusion models can achieve high image quality and attribute fidelity.

3.2 Collaborative Inference

After training, each client $c \in C$ can send a request to the server containing optional textual attribute labels y . The individual steps during the inference are specified in Alg. 2. The server first samples initial noisy images $\hat{x}_T \sim \mathcal{N}(0, 1)$ and starts denoising them using ϵ_θ^s for $T - t_\zeta$ steps conditioned on the label y . The still noisy samples $\hat{x}_{t_\zeta}^s$ are sent to the client c , which computes the final t_ζ denoising steps using its local model ϵ_θ^c . To account for the increased amount of noise in $\hat{x}_{t_\zeta}^s$ and hence allow for a higher noise reduction on the client node, the variance and noise scheduler are adapted considering the cut point t_ζ . While keeping the total amount of timesteps fixed, the maximum value M is defined to adapt the schedulers. A sufficiently large cut point t_ζ ensures that possibly sensitive features are generated on the client side while the server performs the less privacy-critical initial denoising steps. If multiple clients request samples from the same label y , the server-side denoising process can be run once to generate an intermediate noise sample, and each client solely has to compute the remaining denoising steps.

4 Experiment

To assess our approach, we implement Alg. 1 and Alg. 2 and train the models on common benchmark datasets. We simulate a scenario in which $k = 5$ clients use a trusted server to train a DDPM or LDM collaboratively. Each client has access to an individual subset from the same domain. Thereby, we investigate the influence of collaborative training on the fidelity of generated images. Furthermore, we analyze the influence of the chosen cut point t_ζ on sample fidelity with respect to disclosed information.

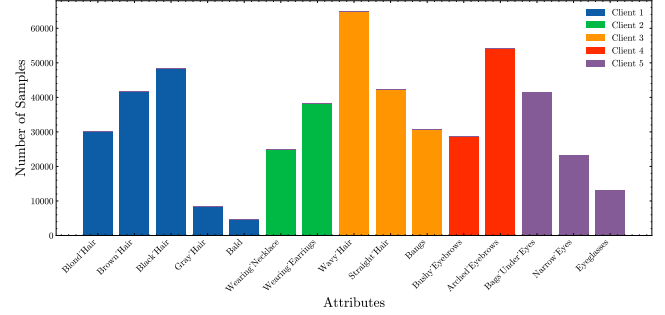


Figure 3: While datasets such as CIFAR-10 and AWA2 were evenly partitioned among clients (IID), CelebA was deliberately distributed according to attribute labels to simulate heterogeneous, non-IID client data. Each color indicates one client’s subset of dominant attributes, such as hair color, facial features, or accessories. This setup mimics realistic data heterogeneity across participants, where clients capture distinct subpopulations rather than uniform samples.

4.1 Experimental Protocol

To ensure consistent conditions and avoid confounding factors, we maintain identical training and inference hyperparameters and seeds across different runs and settings, if not stated otherwise. We provide our source code for reproducibility using a GitHub repository¹.

Model Architecture: We adopt the network architectures of traditional DDPMs [21], Imagen Models [47], and LDMs [44] which are based on the U-Net architecture [45] to process 32×32 , 64×64 , 256×256 , and 512×512 RGB images. As in the original implementation, the Imagen models are conditioned on text embeddings computed by T5-Base [42]. For the DDPMs, we use one-hot encoding. For the LDMs, we use pre-trained U-Nets as well as text- and autoencoders from “CompVis/lm-text2im-large-256” [44] and “runwayml/stable-diffusion-v1-5” [44] from huggingface. Unlike Saharia et al. [47], we do not apply any super-resolution model to increase the fidelity of the generated images in the Imagen model, as the focus of our work lies on the feasibility of the collaborative training and inference process. However, our collaborative diffusion setting also allows each client to add individual or shared super-resolution models [46] to their pipeline to upscale the generated images.

Datasets: We train and evaluate our collaborative diffusion models on common datasets: *CelebA*, *CIFAR-10*, *Animals-with-Attributes2* (*Awa2*). The CelebA dataset, collected by Liu et al. [33], consists of over 200,000 facial images of celebrities annotated with 40 binary attribute labels, including gender appearance, perceived age, hair color, and fa-

¹<https://github.com/SimeonAllmendinger/collafuse>

cial expressions. The CIFAR-10 dataset [29] includes 60,000 32x32 color images across 10 classes, such as airplanes, automobiles, and animals. The Awa2 dataset [64] contains 37,322 images of 50 animal classes with 85 attributes.

To evaluate CollaFuse under more realistic conditions, we extended our experimental setup beyond IID data partitions. While CIFAR-10 and Awa2 were uniformly split among clients, the CelebA dataset was distributed non-IID with respect to semantic attributes (Fig. 3). Each client thus specialized in distinct attribute combinations (e.g., hair color, facial traits, or accessories), reflecting natural data heterogeneity often observed in federated or collaborative learning scenarios.

Training Parameters: Our training protocol employs a learning rate of 0.001, a batch size of 8, and $T = 1000$ timesteps. Each client holds 10,000 / 56,870-123,908 / 6,717 training images and 2,000 / 6,319-13,768 / 746 test images (hold-out dataset) w.r.t the different datasets CIFAR-10 / CelebA / Awa2. The experiments were conducted utilizing 11 NVIDIA A100-SXM4-80GB for computational processing.

Evaluation Metrics: To assess the quality of the generated images, we calculate the common *Fréchet Inception Distance* (FID) [18] and the *Fréchet CLIP Distance* (FCD) between the test dataset and generated images from each client. We differentiate between images generated by clients from pure Gaussian noise ($t_\zeta = 1000$), and images generated based on the server image at the cut point. All metrics are computed on the implementations provided by Parmar et al. [41] to ensure stable and comparable evaluation results. For both metrics, lower values indicate better approximation of the training distribution and improved image quality.

As we are interested in the performance of CollaFuse, we calculate the image fidelity across the set of clients to compare the performance for different values of t_ζ . Furthermore, we calculate the fidelity between the partially diffused images at the cut point t_ζ and the original images of the clients to assess the information disclosed to the server.

4.2 Experimental Results

In our experiments, we analyze the performance of collaborative diffusion models by focusing on specific distributed categories among clients. Fig. 2 displays exemplary generated images of our collaborative approach from the dataset CelebA, comparing them with their attributes and real images from the dataset. Our quantitative analysis includes a comparison with two baselines: global model ($t_\zeta = 0$) and independent client models ($t_\zeta = 1000$). The single global model (GM) on the server node is trained using the combined datasets of all clients, while the independent client models (ICM) are trained on client-specific distributed sub-datasets and separately operate on the client node. The FID and FCD

scores in Fig. 4 illustrate the feasibility of training diffusion models collaboratively. Each column shows the scores for a different architecture, dataset, and image resolution. The first row compares the performance for different cut-points with the GM (dashed horizontal line) and ICMs (solid horizontal line). The squares represent the FID and FCD scores for the respective cut points. Further, it is illustrated whether collaboration increases or decreases the performance. The second row shows the FID and FCD scores based on the images generated from the server, which are then sent to the clients. The figure shows that models with cut points $t_\zeta \leq 200$ surpass the performance of the independent client models in favor of collaborative image synthesis. Our collaborative experiments with smaller cut points even manage to outperform the global model. However, cut points $t_\zeta > 300$ often weaken the fidelity of image generation, which converges with the performance of the independent client models for higher cut points.

In terms of **image quality**, we observe that the degradation of image fidelity and visual characteristics is evident in images generated by the server as the cut point t_ζ increases. Fig. 5 displays this deterioration, which affects the images generated by the server at higher cut points. Conversely, the client’s performance in generating images from noise is compromised when operating with low cut points. However, leveraging our collaborative approach, each client can produce meaningful images with improved fidelity, as shown in Fig. 4, making use of denoised images provided by the server. Additionally, our results indicate that incorporating an adjustment of the variance and noise scheduler into the collaborative inference process significantly enhances the denoising capabilities on the client node. This is particularly effective given the higher levels of residual noise in the images received from the server, leading to an improvement in the overall quality of the images. Adopting the adjusted parameter M in Alg. 2, especially with an increased emphasis on managing variance and noise in the collaborative setting, proves to be beneficial in refining the quality of the final image output.

In terms of **information disclosure** to the server, we analyze the similarity between real images and the images generated by the server—these are the images sent to clients for further denoising. We use the FID and FCD scores to assess how similar the generated images match the training distribution. The results show that as the cut point increases, the FID and FCD scores also rise, indicating a decrease in the similarity between the distribution of real images and that of the server-generated images. Fig. 6 illustrates the server’s ability to generate images and the extent of information disclosed for a cut point $t_\zeta = 400$.

To further substantiate our claim of limited information disclosure at intermediate cut points, we conducted a dedicated attribute inference experiment on CelebA. Using a

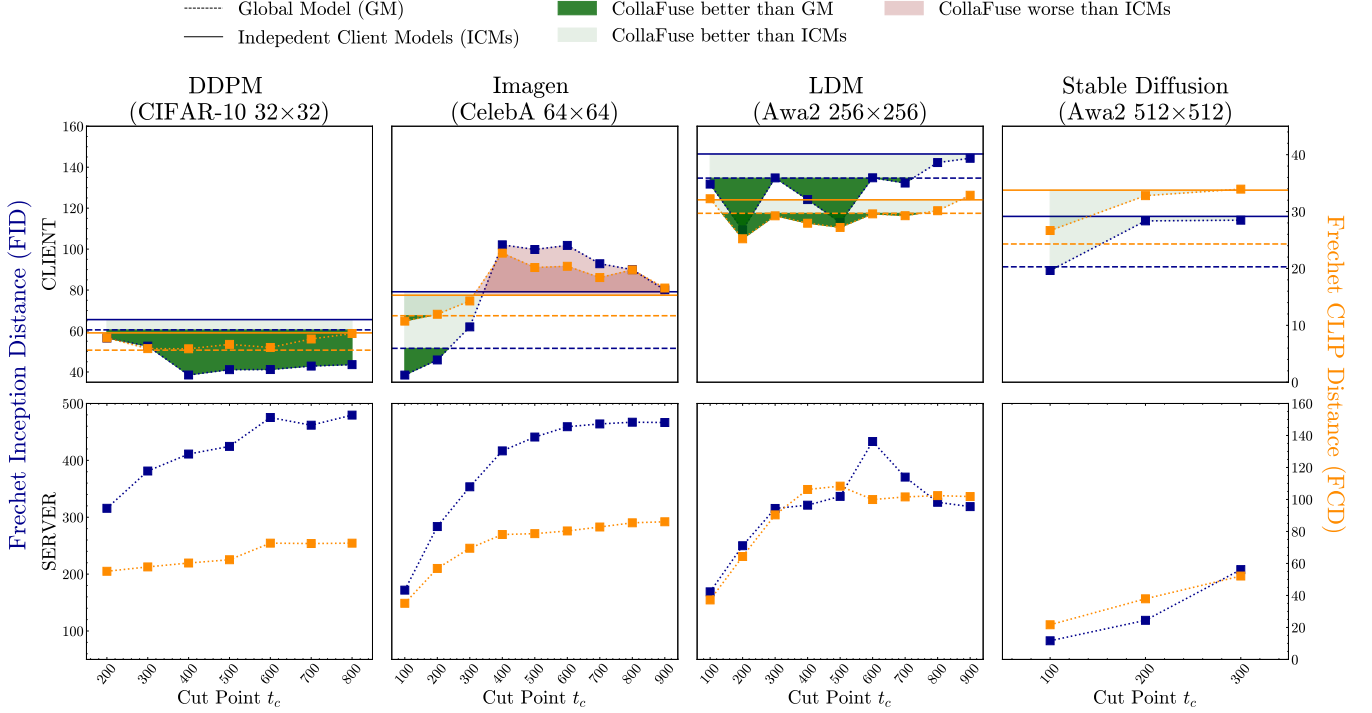


Figure 4: Fidelity evaluation of clients and server using FID $\downarrow$ and FCD $\downarrow$: We assess 10,000 / 6,319-13,768 / 3,730 real x_0 and collaboratively generated images ($\hat{x}_0^c \circ \hat{x}_{t_c}^s(\epsilon)$) from the CIFAR-10 / CelebA / Awa2 dataset across clients. Our findings show that cut points with $t_c \leq 200$ outperform the baseline of independent client models (ICMs) ($t_c = 1000$). Notably, smaller cut points even surpass the global model (GM) ($t_c = 0$), which is trained on all client datasets. In particular, training with smaller images or latent sizes benefits from CollaFuse. As expected, information disclosure almost consistently decreases as the cut point (t_c) increases across all models (DDPM, Imagen, LDM, Stable Diffusion).

ViT-Base classifier (*google/vit-base-patch16-224*; not pre-trained), we trained attribute predictors on intermediate images generated at different cut points t_c . Fig. 7 summarizes the resulting F1-score differences for all 40 attributes relative to the baseline without a cut point ($t_c = 0$). The results reveal a clear decline in attribute inference accuracy as the cut point decreases, confirming that earlier (more noisy) intermediate representations leak substantially less semantic and identity-related information. This provides empirical evidence that the diffusion process itself offers a natural privacy buffer, as higher noise levels reduce the reconstructibility of sensitive features while still enabling effective collaborative generation.

Building on the attribute inference analysis, which focused on the leakage of semantic or sensitive attribute information, we next investigated whether intermediate representations could be exploited to reconstruct original data. This complementary evaluation assesses a more direct form of privacy risk, namely, the ability of an adversarial or malicious client to recover identifiable visual content from shared features.

To further assess reconstructibility and potential cross-

client information leakage, we performed inversion attack experiments on the CIFAR-10 dataset. In this setting, a simulated malicious client attempted to reconstruct another client’s private (training) data or infer its images from intermediate representations shared during collaborative generation. Using DDPMs conditioned on features extracted at various cut points t_c , we observed that reconstructed samples rapidly lost identifiable content as the cut point moved earlier in the generation process (Fig. 8). For cut points $t_c \geq 400$, the models exhibited a pronounced decline in their ability to reconstruct training data from other clients. Specifically, reconstruction quality remained higher for a model’s own training data but deteriorated substantially for data originating from different clients, resulting in a sharp increase in the FCD metric. This indicates that, beyond this cut point, adversarial clients were increasingly constrained in reproducing the data distribution of other participants, reflecting a reduced potential for cross-client information leakage. These findings demonstrate that CollaFuse effectively limits cross-client disclosure and substantially reduces reconstructibility risk, reinforcing its inherent privacy-preserving characteristics at intermediate cut points.

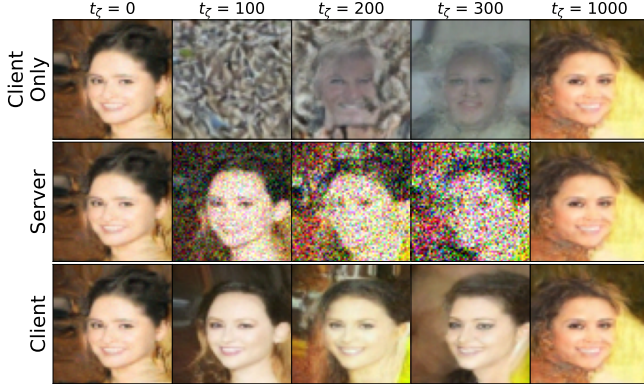


Figure 5: Samples generated by CollaFuse trained on CelebA with different cut points t_ζ . The top row depicts images produced by the server, which are then sent to the client. The bottom row shows the samples after the final denoising performed by the client. For $t_\zeta = 0$, the server performs the full denoising process; for $t_\zeta = 1000$, each client trains a separate diffusion model without a server component.

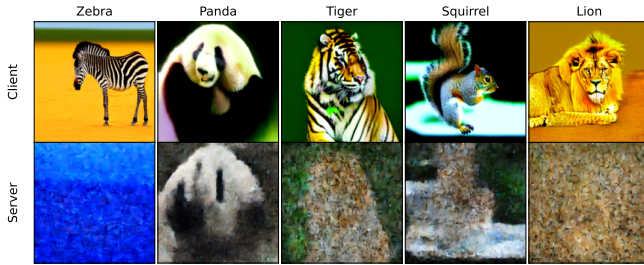


Figure 6: Samples generated by CollaFuse trained on Awa2 for the cut point $t_\zeta = 400$. The top row depicts images after the final denoising performed by the client. The bottom row shows images produced by the server, which are then sent to the client.

5 Discussion, Limitations, and Future Work

Our findings reveal that CollaFuse produces images of higher quality than those generated by independently trained diffusion models using sub-datasets. In certain instances, they even surpass the performance of globally trained diffusion models. This not only highlights the efficacy of our method but also demonstrates its capability to tackle the personalization versus generalization challenge frequently encountered in federated learning scenarios [65]. Beyond image fidelity, our extended experiments provide a more comprehensive understanding of CollaFuse in terms of information disclosure and privacy protection. The attribute inference analysis on CelebA shows that intermediate representations at earlier cut points reveal substantially less semantic or identity-related information, indicating that higher noise levels in the diffusion process naturally act as a pri-

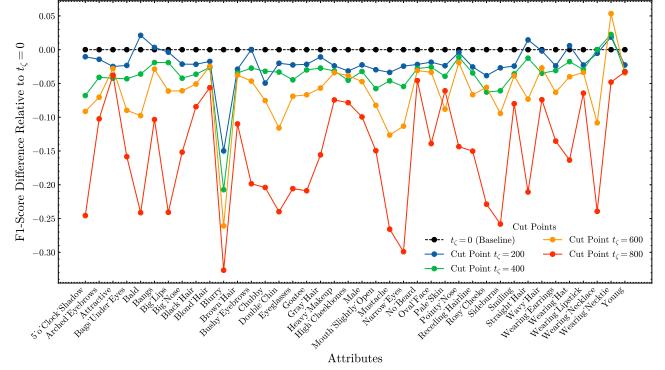


Figure 7: Attribute inference F1-score differences for 40 CelebA attributes across varying cut points t_ζ . Each line represents the change in F1-score relative to the baseline without a cut point ($t_\zeta = 0$). Lower scores indicate reduced attribute predictability from intermediate representations. The results show a consistent decline in inference accuracy for earlier cut points, suggesting that higher noise levels at intermediate stages naturally mitigate information leakage. All baseline F1-scores at $t_\zeta = 0$ are above 65%.

vacy buffer. Complementary inversion attack experiments on CIFAR-10 further confirm that such intermediate representations can hardly be used to reconstruct identifiable client data, as reconstructed samples rapidly lose visual fidelity and class-specific details. Together, these results provide empirical support that the collaborative exchange in CollaFuse leaks minimal information and effectively limits reconstructibility across clients. At the same time, our approach circumvents the need to share raw data or complete model updates, opting instead to share only the diffused images alongside server-side noise. Furthermore, by delegating computationally intensive tasks, our approach significantly reduces the computational load on individual clients, leveraging the potential strengths of growing foundation models on large servers. Consequently, even in cases where image fidelity decreases, clients may still favor a collaborative diffusion model for its ability to lighten their computational load, even in simple one-to-one setups. Thus, our strategy facilitates a balanced optimization of performance, information disclosure, and computational resources and can be tailored to individual preferences.

Limitations: Our current implementation of CollaFuse is based on DDPMs, which provide a theoretically grounded framework for analyzing collaborative training dynamics, cut-point sensitivity, and information disclosure. However, DDPMs are computationally intensive due to their stochastic denoising process. While this choice enables interpretability and a rigorous analysis of privacy aspects, it limits inference efficiency. Furthermore, our current approach assumes trustworthy clients and an honest server. However, collabo-

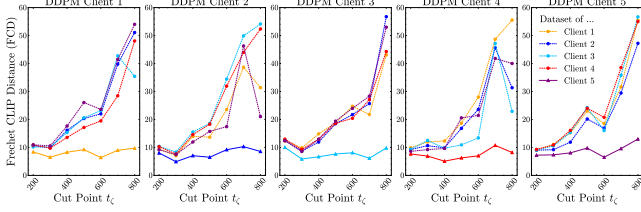


Figure 8: Results of cross-client inversion attacks on CIFAR-10 across different cut points t_ζ . As the cut point decreases (e.g., more denoising steps are performed on the server), reconstructed images exhibit a marked loss of client-specific semantics and visual detail. For $t_\zeta \geq 400$, models show a decline in their ability to reconstruct other clients’ training data, reflected in an increased FCD metric.

rative frameworks are known to be susceptible to backdoor attacks [63, 59], in which an adversarial client may attempt to inject hidden functionalities into a shared model. Prior research has shown that diffusion models themselves are vulnerable to such attacks [57, 5]. While these scenarios are beyond the current scope, future work will extend our framework to systematically assess and mitigate adversarial threats while preserving image fidelity and efficiency.

Future Work: Future research will focus on extending CollaFuse to more advanced and efficient denoising paradigms such as DDIM [53] and flow-based diffusion models. These variants can significantly accelerate inference and reduce resource requirements while maintaining the collaborative and privacy-preserving characteristics of our approach. In addition, we plan to scale CollaFuse to larger datasets, dynamic cut-point adaptation, and high-resolution domains to comprehensively assess its scalability and privacy–utility trade-offs under realistic conditions. Building on our privacy evaluations, future work will further explore formal privacy guarantees and attack-based analyses to establish stronger theoretical and empirical bounds on information leakage. Additionally, future work should empirically compare CollaFuse with FL-based diffusion approaches in terms of image quality, data privacy, computational cost, and communication overhead, while also analyzing the trade-offs among efficiency, privacy, and generation quality in more detail. Another promising direction is to investigate vulnerabilities such as backdoor attacks in collaborative diffusion and to develop countermeasures that preserve fidelity and efficiency. Additionally, integrating differentially private training algorithms [8, 14] and studying memorization effects in collaborative diffusion [4, 61, 20] will further advance CollaFuse toward scalable, secure, and privacy-aware real-world applications. Finally, future research should place greater emphasis on algorithmic fairness to reduce the reinforcement of stereotypes and cultural biases when implementing CollaFuse [56], especially since privacy

and fairness are both essential characteristics of real-world collaborative learning [2].

6 Conclusion

Our collaborative diffusion approach CollaFuse offers a novel solution to the challenges of diffusion-based generative models. By dividing the denoising process between a shared server and client models, we address performance, information disclosure, and computational concerns effectively. Our approach enables clients to outsource computationally intensive denoising steps to the server, balancing image quality without the necessity of sharing raw data. Through experiments, we demonstrate the effectiveness of collaborative training in enhancing image quality tailored to each client’s domain while reducing the number of denoising steps on the client side. These findings highlight the potential of CollaFuse in advancing distributed machine learning research and development.

References

- [1] Sean Augenstein, H. Brendan McMahan, Daniel Ramage, Swaroop Ramaswamy, Peter Kairouz, Mingqing Chen, Rajiv Mathews, and Blaise Agüera y Arcas. Generative models for effective ML on private, decentralized datasets. In *International Conference on Learning Representations (ICLR)*, 2020.
- [2] Beatrice Balbierer, Lukas Heinlein, Dominique Zipperling, and Niklas Kühl. A multivocal literature review on privacy and fairness in federated learning. In *Wirtschaftsinformatik 2024 Proceedings*, 2024. URL <https://aisel.aisnet.org/wi2024/14>.
- [3] Tim Brooks, Bill Peebles, Connor Holmes, Will DePue, Yufei Guo, Li Jing, David Schnurr, Joe Taylor, Troy Luhman, Eric Luhman, Clarence Ng, Ricky Wang, and Aditya Ramesh. Video generation models as world simulators. <https://openai.com/research/video-generation-models-as-world-simulators>, 2024. Accessed: 19-June-2024.
- [4] Nicholas Carlini, Jamie Hayes, Milad Nasr, Matthew Jagielski, Vikash Sehwal, Florian Tramèr, Borja Balle, Daphne Ippolito, and Eric Wallace. Extracting training data from diffusion models. In *USENIX Security Symposium (USENIX)*, pages 5253–5270, 2023.
- [5] Sheng-Yen Chou, Pin-Yu Chen, and Tsung-Yi Ho. How to backdoor diffusion models? In *2023 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, page 4015–4024. IEEE, June 2023. doi: 10.1109/cvpr52729.2023.00391.

URL <http://dx.doi.org/10.1109/CVPR52729.2023.00391>.

- [6] Matthijs de Goede, Bart Cox, and Jérémie Decouchant. Training diffusion models with federated learning. *arXiv preprint*, arXiv:2406.12575, 2024.
- [7] Prafulla Dhariwal and Alexander Quinn Nichol. Diffusion models beat gans on image synthesis. In *Advances in Neural Information Processing Systems (NeurIPS)*, pages 8780–8794, 2021.
- [8] Tim Dockhorn, Tianshi Cao, Arash Vahdat, and Karsten Kreis. Differentially private diffusion models. *Transactions on Machine Learning Research (TMLR)*, 2023. ISSN 2835-8856. URL <https://openreview.net/forum?id=ZPpQk7FJXF>.
- [9] Jing Duan, Jie Duan, Xuefeng Wan, and Yang Li. Efficient federated learning method for cloud-edge network communication. In *2023 5th International Conference on Communications, Information System and Computer Engineering (CISCE)*, pages 118–121, 2023. doi: 10.1109/CISCE58541.2023.10142819.
- [10] Chenyou Fan and Ping Liu. Federated generative adversarial learning. In *Chinese Conference on Pattern Recognition and Computer Vision (PRCV)*, pages 3–15, 2020.
- [11] Xingyu Feng, Chengwen Luo, Jiongzhong Chen, Yijing Huang, Jin Zhang, Weitao Xu, Jianqiang Li, and Victor C. M. Leung. Iotsl: Toward efficient distributed learning for resource-constrained internet of things. *IEEE Internet of Things Journal*, 10(11):9892–9905, 2023. doi: 10.1109/IIOT.2023.3235765.
- [12] Matt Fredrikson, Somesh Jha, and Thomas Ristenpart. Model Inversion Attacks that Exploit Confidence Information and Basic Countermeasures. In *Conference on Computer and Communications Security (CCS)*, pages 1322–1333, 2015.
- [13] Matthew Fredrikson, Eric Lantz, Somesh Jha, Simon Lin, David Page, and Thomas Ristenpart. Privacy in pharmacogenetics: An End-to-End case study of personalized warfarin dosing. In *USENIX Security Symposium*, pages 17–32, 2014.
- [14] Sahra Ghalebikesabi, Leonard Berrada, Sven Goyal, Ira Ktena, Robert Stanforth, Jamie Hayes, Soham De, Samuel L. Smith, Olivia Wiles, and Borja Balle. Differentially private diffusion models generate useful synthetic images. *arXiv Preprint*, 2302.13861, 2023.
- [15] Ian J. Goodfellow, Jean Pouget-Abadie, Mehdi Mirza, Bing Xu, David Warde-Farley, Sherjil Ozair, Aaron C. Courville, and Yoshua Bengio. Generative adversarial networks. *Communications of the ACM*, 63(11):139–144, 2020.
- [16] Otkrist Gupta and Ramesh Raskar. Distributed learning of deep neural network over multiple agents. *Journal of Network and Computer Applications*, 116:1–8, 2018.
- [17] Corentin Hardy, Erwan Le Merrer, and Bruno Sericola. Md-gan: Multi-discriminator generative adversarial networks for distributed datasets. In *International Parallel and Distributed Processing Symposium (IPDPS)*, pages 866–877, 2019.
- [18] Martin Heusel, Hubert Ramsauer, Thomas Unterthiner, Bernhard Nessler, and Sepp Hochreiter. Gans trained by a two time-scale update rule converge to a local nash equilibrium. In *Advances in Neural Information Processing Systems (NeurIPS)*, pages 6626–6637, 2017.
- [19] Dominik Hintersdorf, Lukas Struppek, Manuel Brack, Felix Friedrich, Patrick Schramowski, and Kristian Kersting. Does clip know my face? *Journal of Artificial Intelligence Research*, 80:1033–1062, July 2024. ISSN 1076-9757. doi: 10.1613/jair.1.15461. URL <http://dx.doi.org/10.1613/jair.1.15461>.
- [20] Dominik Hintersdorf, Lukas Struppek, Kristian Kersting, Adam Dziedzic, and Franziska Boenisch. Finding nemo: localizing neurons responsible for memorization in diffusion models. In *Proceedings of the 38th International Conference on Neural Information Processing Systems*, NIPS ’24, Red Hook, NY, USA, 2024. Curran Associates Inc. ISBN 9798331314385.
- [21] Jonathan Ho, Ajay N. Jain, and Pieter Abbeel. Denoising diffusion probabilistic models. In *Advances in Neural Information Processing Systems 33 (NeurIPS 2020)*, 2020. URL <https://proceedings.neurips.cc/paper/2020/hash/4c5bcfec8584af0d967f1ab10179ca4b-Abstract.html>.
- [22] Edward J. Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. Lora: Low-rank adaptation of large language models. In *International Conference on Learning Representations (ICLR)*, 2022.
- [23] Xumin Huang, Peichun Li, Hongyang Du, Jiawen Kang, Dusit Niyato, Dong In Kim, and Yuan Wu. Federated learning-empowered ai-generated content in wireless networks. *IEEE Network*, 38(5):304–313, 2024. doi: 10.1109/MNET.2024.3353377.

- [24] Madhura Joshi, Ankit Pal, and Malaikannan Sankarabubbu. Federated learning for healthcare domain - pipeline, applications and challenges. *ACM Transactions on Computing for Healthcare*, 3(4), 2022.
- [25] Fiona Victoria Stanley Jothiraj and Afra Mashhadi. Phoenix: A federated generative diffusion model. In *Companion Proceedings of the ACM Web Conference 2024*, WWW '24 Companion, pages 1568–1577, Singapore, Singapore, May 2024. ACM. doi: 10.1145/3589335.3651935. URL <https://doi.org/10.1145/3589335.3651935>.
- [26] Amirhossein Kazerooni, Ehsan Khodapanah Aghdam, Moein Heidari, Reza Azad, Mohsen Fayyaz, Ilker Hacihaliloglu, and Dorit Merhof. Diffusion models in medical imaging: A comprehensive survey. *Medical Image Analysis*, 88:102846, 2023.
- [27] Diederik P. Kingma and Max Welling. Auto-Encoding Variational Bayes. In *International Conference on Learning Representations (ICLR)*, 2014.
- [28] Pranvera Kortoçi, Yilei Liang, Pengyuan Zhou, Lik-Hang Lee, Abbas Mehrabi, Pan Hui, Sasu Tarkoma, and Jon Crowcroft. Federated split gans. In *ACM Workshop on Data Privacy and Federated Learning Technologies for Mobile Edge Network*, 2022.
- [29] Alex Krizhevsky, Vinod Nair, and Geoffrey Hinton. Cifar-10 (canadian institute for advanced research). 2009. URL <http://www.cs.toronto.edu/~kriz/cifar.html>.
- [30] Bingkun Lai, Jiayi He, Jiawen Kang, Gaolei Li, Minrui Xu, Tao zhang, and Shengli Xie. On-demand quantization for green federated generative diffusion in mobile edge networks. In *ICC 2024 - IEEE International Conference on Communications*, page 2883–2888. IEEE, June 2024. doi: 10.1109/icc51166.2024.10622695. URL <http://dx.doi.org/10.1109/ICC51166.2024.10622695>.
- [31] Wei Li, Jinlin Chen, Zhenyu Wang, Zhidong Shen, Chao Ma, and Xiaohui Cui. Ifl-gan: Improved federated learning generative adversarial network with maximum mean discrepancy model aggregation. *IEEE Transactions on Neural Networks and Learning Systems*, pages 1–14, 2022.
- [32] Claire Little, Mark Elliot, and Richard Allmendinger. Federated learning for generating synthetic data: a scoping review. *International Journal of Population Data Science*, 8(1), 2023.
- [33] Ziwei Liu, Ping Luo, Xiaogang Wang, and Xiaoou Tang. Deep Learning Face Attributes in the Wild. In *International Conference on Computer Vision (ICCV)*, 2015.
- [34] Boyuan Ma, Xiang Yin, Jing Tan, Yongfeng Chen, Haiyou Huang, Hao Wang, Weihua Xue, and Xiaojuan Ban. Fedst: Federated style transfer learning for non-iid image segmentation. *Proceedings of the AAAI Conference on Artificial Intelligence*, 38(5):4053–4061, March 2024. ISSN 2159-5399. doi: 10.1609/aaai.v38i5.28199. URL <http://dx.doi.org/10.1609/aaai.v38i5.28199>.
- [35] Giorgio Mariani, Irene Tallini, Emilian Postolache, Michele Mancusi, Luca Cosmo, and Emanuele Rodolà. Multi-source diffusion models for simultaneous music generation and separation. In *International Conference on Learning Representations (ICLR)*, 2024.
- [36] Brendan McMahan, Eider Moore, Daniel Ramage, Seth Hampson, and Blaise Agüera y Arcas. Communication-efficient learning of deep networks from decentralized data. In *International Conference on Artificial Intelligence and Statistics (AISTATS)*, pages 1273–1282, 2017.
- [37] Matías Mendieta, Guangyu Sun, and Chen Chen. Navigating heterogeneity and privacy in one-shot federated learning with diffusion models. In *2025 IEEE/CVF Winter Conference on Applications of Computer Vision (WACV)*, pages 2601–2610, 2025. doi: 10.1109/WACV61041.2025.00258.
- [38] Sajid Nazir and Mohammad Kaleem. Federated learning for medical image analysis with deep neural networks. *Diagnostics*, 13(9), 2023.
- [39] Alexander Quinn Nichol and Prafulla Dhariwal. Improved denoising diffusion probabilistic models. In *International Conference on Machine Learning (ICML)*, pages 8162–8171, 2021.
- [40] Shoki Ohta and Takayuki Nishio. \$A\$-split: A privacy-preserving split computing framework for cloud-powered generative AI. *arXiv preprint*, arXiv:2310.14651, 2023.
- [41] Gaurav Parmar, Richard Zhang, and Jun-Yan Zhu. On aliased resizing and surprising subtleties in gan evaluation. In *Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 11400–11410, 2022.
- [42] Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J. Liu. Exploring the limits of transfer learning with a unified text-to-text transformer. *Journal of Machine Learning Research*, 21(140):1–67, 2020.

- [43] Resmi Ramachandranpillai, Md Fahim Sikder, David Bergström, and Fredrik Heintz. Bt-gan: Generating fair synthetic healthdata via bias-transforming generative adversarial networks. *Journal of Artificial Intelligence Research*, 79:1313–1341, April 2024. ISSN 1076-9757. doi: 10.1613/jair.1.15317. URL <http://dx.doi.org/10.1613/jair.1.15317>.
- [44] Robin Rombach, Andreas Blattmann, Dominik Lorenz, Patrick Esser, and Björn Ommer. High-resolution image synthesis with latent diffusion models. In *Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 10684–10695, 2022.
- [45] Olaf Ronneberger, Philipp Fischer, and Thomas Brox. U-net: Convolutional networks for biomedical image segmentation. In *Medical Image Computing and Computer-Assisted Intervention (MICCAI)*, volume 9351, pages 234–241, 2015.
- [46] Chitwan Saharia, William Chan, Huiwen Chang, Chris A. Lee, Jonathan Ho, Tim Salimans, David J. Fleet, and Mohammad Norouzi. Palette: Image-to-image diffusion models. In *Special Interest Group on Computer Graphics and Interactive Techniques (SIGGRAPH)*, pages 15:1–15:10, 2022.
- [47] Chitwan Saharia, William Chan, Saurabh Saxena, Lala Li, Jay Whang, Emily L. Denton, Seyed Kamyar Seyed Ghasemipour, Raphael Gontijo Lopes, Burcu Karagol Ayan, Tim Salimans, Jonathan Ho, David J. Fleet, and Mohammad Norouzi. Photorealistic text-to-image diffusion models with deep language understanding. In *Conference on Neural Information Processing Systems (NeurIPS)*, 2022.
- [48] René Schwermer, Jonas Buchberger, Ruben Mayer, and Hans-Arno Jacobsen. Federated office plug-load identification for building management systems. In *ACM International Conference on Future Energy Systems*, page 114–126, 2022.
- [49] René Schwermer, Ekin-Alp Bicer, Pascal Schirmer, Ruben Mayer, and Hans-Arno Jacobsen. Federated computing in electric vehicles to predict coolant temperature. In *International Middleware Conference: Industrial Track*, page 8–14, 2023.
- [50] Yiqing Shen, Arcot Sowmya, Yulin Luo, Xiaoyao Liang, Dinggang Shen, and Jing Ke. A federated learning system for histopathology image analysis with an orchestral stain-normalization gan. *IEEE Transactions on Medical Imaging*, 42(7):1969–1981, 2023.
- [51] Reza Shokri, Marco Stronati, Congzheng Song, and Vitaly Shmatikov. Membership inference attacks against machine learning models. In *Symposium on Security and Privacy (S&P)*, pages 3–18, 2017.
- [52] Uriel Singer, Adam Polyak, Thomas Hayes, Xi Yin, Jie An, Songyang Zhang, Qiyan Hu, Harry Yang, Oran Ashual, Oran Gafni, Devi Parikh, Sonal Gupta, and Yaniv Taigman. Make-a-video: Text-to-video generation without text-video data. In *International Conference on Learning Representations (ICLR)*, 2023.
- [53] Jiaming Song, Chenlin Meng, and Stefano Ermon. Denoising diffusion implicit models. In *International Conference on Learning Representations*, 2021. URL <https://openreview.net/forum?id=StlgiaRCHLP>.
- [54] Yalin Song, Hang Liu, Shuai Zhao, Haozhe Jin, Junyang Yu, Yanhong Liu, Rui Zhai, and Longge Wang. Fedadkd: heterogeneous federated learning via adaptive knowledge distillation. *Pattern Analysis and Applications*, 27(4), October 2024. ISSN 1433-755X. doi: 10.1007/s10044-024-01350-4. URL <http://dx.doi.org/10.1007/s10044-024-01350-4>.
- [55] Yang Song and Stefano Ermon. Improved techniques for training score-based generative models. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2020.
- [56] Lukas Struppek, Dom Hintersdorf, Felix Friedrich, Manuel Br, Patrick Schramowski, and Kristian Kersting. Exploiting cultural biases via homoglyphs in text-to-image synthesis. *Journal of Artificial Intelligence Research*, 78:1017–1068, December 2023. ISSN 1076-9757. doi: 10.1613/jair.1.15388. URL <http://dx.doi.org/10.1613/jair.1.15388>.
- [57] Lukas Struppek, Dominik Hintersdorf, and Kristian Kersting. Rickrolling the artist: Injecting backdoors into text encoders for text-to-image synthesis. In *International Conference on Computer Vision (ICCV)*, 2023.
- [58] Shenghuan Sun, Gregory Goldgof, Atul Butte, and Ahmed Alaa. Aligning synthetic medical images with clinical knowledge using human feedback. In *Thirty-seventh Conference on Neural Information Processing Systems*, 2023. URL <https://openreview.net/forum?id=qlnlamFQEa>.
- [59] Behrad Tajalli, Oguzhan Ersoy, and Stjepan Picek. On feasibility of server-side backdoor attacks on split learning. In *IEEE Security and Privacy Workshops (SPW)*, pages 84–93, 2023.
- [60] Chandra Thapa, Pathum Chamikara Mahawaga Arachchige, Seyit Camtepe, and Lichao

- Sun. SplitFed: When federated learning meets split learning. *AAAI Conference on Artificial Intelligence (AAAI)*, 36(8):8485–8493, 2022.
- [61] Gerrit J. J. van den Burg and Christopher K. I. Williams. On memorization in probabilistic deep generative models. In *Conference on Neural Information Processing Systems (NeurIPS)*, pages 27916–27928, 2021.
- [62] Narasimha Raghavan Veeraragavan and Jan Franz Nygård. Securing federated gans: Enabling synthetic data generation for health registry consortiums. In *International Conference on Availability, Reliability and Security (ARES)*, pages 89:1–89:9, 2023.
- [63] Hongyi Wang, Kartik Sreenivasan, Shashank Rajput, Harit Vishwakarma, Saurabh Agarwal, Jy-yong Sohn, Kangwook Lee, and Dimitris S. Papailiopoulos. Attack of the tails: Yes, you really can backdoor federated learning. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2020.
- [64] Yongqin Xian, Christoph H. Lampert, Bernt Schiele, and Zeynep Akata. Zero-shot learning—a comprehensive evaluation of the good, the bad and the ugly. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 41(9):2251–2265, 2019.
- [65] Dixi Yao and Baochun Li. Perfedrlnas: One-for-all personalized federated neural architecture search. *Proceedings of the AAAI Conference on Artificial Intelligence*, 38(15):16398–16406, March 2024. ISSN 2159-5399. doi: 10.1609/aaai.v38i15.29576. URL <http://dx.doi.org/10.1609/aaai.v38i15.29576>.
- [66] Benshun Yin, Zhiyong Chen, and Meixia Tao. Predictive gan-powered multi-objective optimization for hybrid federated split learning. *IEEE Transactions on Communications*, 71(8):4544–4560, 2023.
- [67] Michal Zajac, Kamil Deja, Anna Kuzina, Jakub M. Tomczak, Tomasz Trzcinski, Florian Shkurti, and Piotr Milos. Exploring continual learning of diffusion models. In *Proceedings of the 4th Workshop on Continual Learning in Computer Vision (CLVision), CVPR Workshops*, June 2023. CVPR 2023 Workshop paper.
- [68] Zhuang Zhao, Feng Yang, and Guirong Liang. *Federated Learning Based on Diffusion Model to Cope with Non-IID Data*, page 220–231. Springer Nature Singapore, December 2023. ISBN 9789819985463. doi: 10.1007/978-981-99-8546-3_18. URL http://dx.doi.org/10.1007/978-981-99-8546-3_18.
- [69] Ligeng Zhu, Zhijian Liu, and Song Han. Deep leakage from gradients. In *Advances in Neural Information Processing Systems (NeurIPS)*, pages 14747–14756, 2019.