Point-mixed — whole-workload goodput, c1
Matched repeats r0, r1

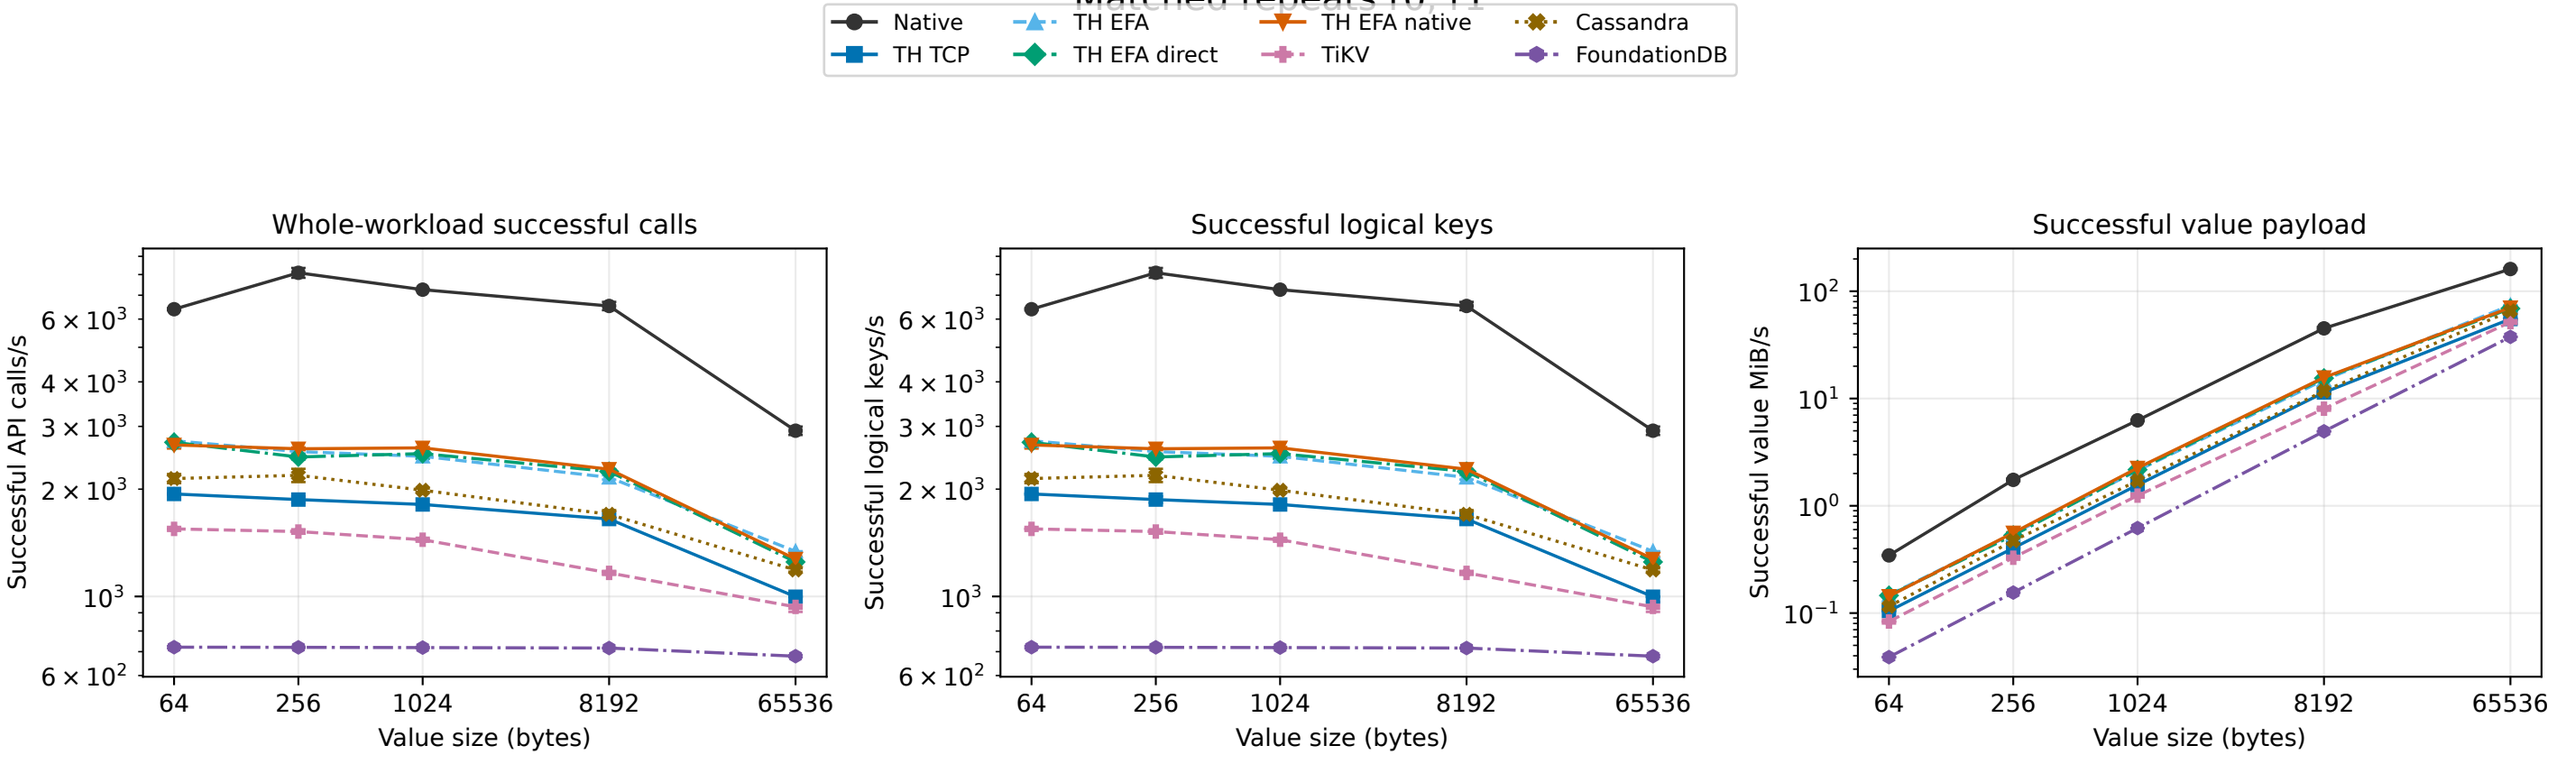

Goodput covers the ENTIRE mixed workload, not the adjacent operation-specific latency populations. Value MiB/s uses successful value payload accounting, not wire traffic or delete/missing bytes. Points: median of matched per-repeat values; whiskers: observed run min/max, NOT confidence intervals. No pooled quantiles; N=2 supports no confidence claim. Successful latency is conditional on operation/outcome. RF1 does not equalize consistency, durability, security, or transaction semantics. Primary RF1 only: native uses value_wal_barrier and TH explicit caches are off; other cohorts use their stated settings. Warm OS is not guaranteed cache residency. Tail quantiles are descriptive, including small populations.